



Primer

PN-100/18 Nomex Wall ironers Ø180

ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.

EFFICIENCY

Acoustic comfort : 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on EXCELLENCE).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.

FEATURES


Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
Two available models:
• **Standard**: roll with cotton polyester coating.
• **Nomex**: roll with Nomex coating.

EASY MAINTENANCE

Easy installation : requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.

OTHERS

Front feeding and return.
Roll Ø 180mm.
Working widths: 1.000 and 1.200 mm.
Electric heating.
CE certification.

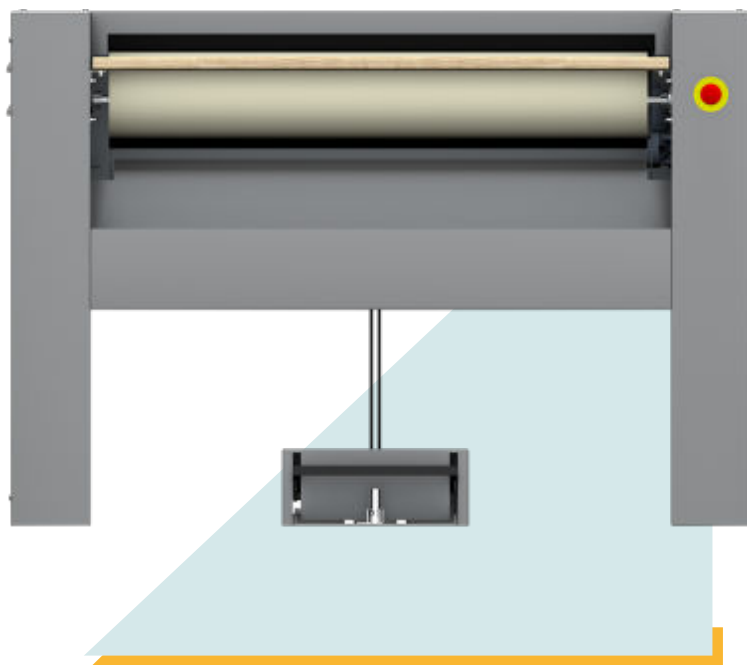


OPTIONS

- Pedal control instead of photocell (except mod. EXCELLENCE)
- 230 V I N 50 Hz (except mod. 200 EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS		UNIT.	PN-100/18 Nomex
Theoretical production: 20-25 humidity		Kg/h	15
		Lb/h	33,07
Roll Ø		mm	180
		inch	7,09
Working width		mm	1.000
		inch	39,37
Working speed		m/min	2.02
		ft/mn	6,62
Electronic control		-	YES
Chest motion		-	Manual
POWER			
Heating power		Kw	3,30
Roll motor power		Kw	0,03
Total electric power		Kw	3,33
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	3 x 4 / 16A
		nº x AWG/A	3 x 11 / 16A
Tension 230 V III + T		nº x mm²/A	-
		nº x AWG/A	-
Tension 400 V III + N + T		nº x mm²/A	-
		nº x AWG/A	-
DIMENSIONS			
Net / gross width		mm	1.370 / 1.490
		inch	53,94 / 58,66
Net / gross depth		mm	438 / 540
		inch	17,24 / 21,26
Net / gross height		mm	952 / 1.130
		inch	37,48 / 44,49
Net / gross weight gross		Kg	80 / 100
		Lb	176,37 / 220,46
Net / gross volume gross		m³	0,57 / 0,91
		ft³	20,13 / 32,14
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55



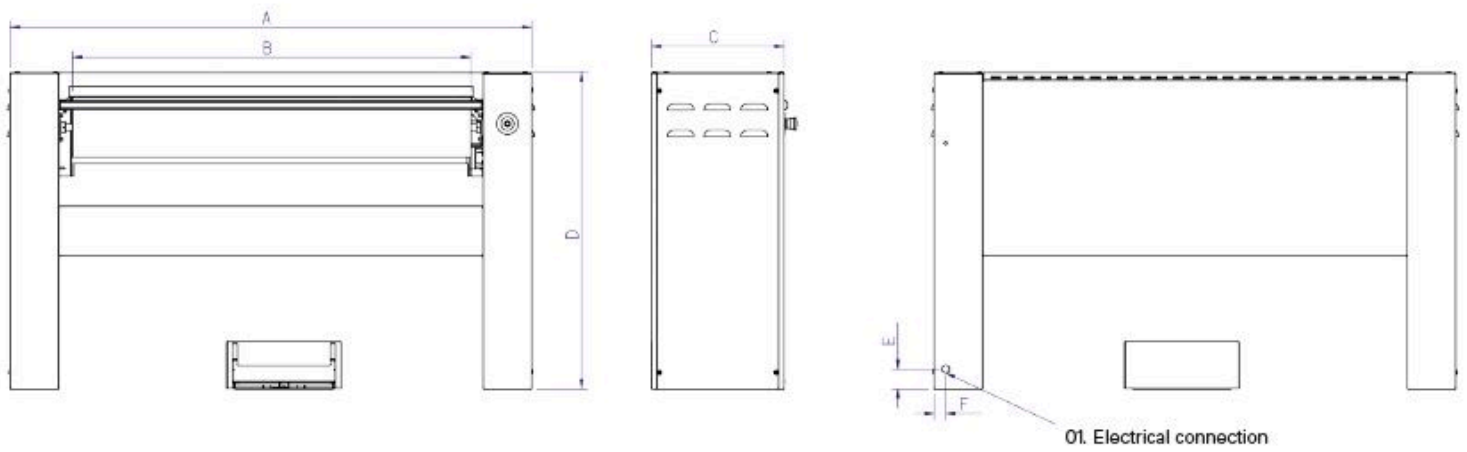

	A	B	C	D	E	F
PN-100/18	1694	1447	689	1354	68	785
PN-120/18	1694	1447	689	1354	68	785