



Primer

DEB-23 HP EXCELLENCE

EXCELLENCE Heat pump tumble dryers



T2 CONTROL

User friendly and totally programmable Touch II with 7" coloured touch screen.
USB Connection. Online platform free of charge for programming, telemetry, data analysis, etc. thanks to the IoT.
Videos on displays (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.



EFFICIENCY

DOUBLE FLOW: Mixed axial-radial airflow.
SMART DRY: Smart humidity sensor.
Big fluff filter.
Double door glass.
Low energy consumption.



VERSATILITY

Make to order - customisation.
WET CLEANING.
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior.



CONNECTIVITY

PRIMERLINK: IoT connectivity as standard.
Management of laundries: OPL and COIN.
Remote payment.



ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site.




EASY MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



OTHERS


Grey skinplate outer casing, stainless steel look.
EFFICIENT DRUM: new drum with stamped holes.
COOL DOWN: anti-wrinkle at the end of the cycle.
LINT FILTER: new filter drawer with wide surface.
CE approved.

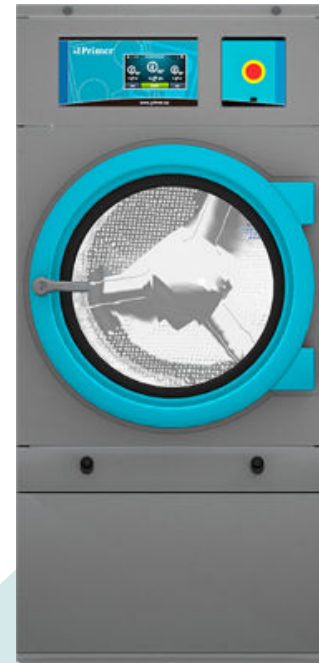

OPTIONS

- License IoT - PrimerLink
- NG gas option (Natural)
- Tropicalized model
- Stainless steel front and side panels DEB-23 HP
- Front panel in stainless steel DEB-23 HP
- Maritime wooden packing DEB-23 HP
- 230 V | 50 Hz HP
- 230 V | 60 Hz HP
- Several payment systems for self-service

TECHNICAL DATA	UNIT.	DEB-23 HP EXCELLENCE
Capacity 1/18	Kg	26
Capacity 1/20	Kg	23
Capacity 1/30	Kg	15
Hourly Output*	Kg/h	22,9
Evaporation capacity*	l/h	11,5
DRUM		
Ø Drum	mm	855
Drum lenght	mm	800
Drum volume	l	460
Ø Loading door	mm	574
POWER		
Drum motor power	kW	0,37
Fan motor power	kW	0,55
Electric heating power ALL RANGES	kW	3,8 + 4***
Total electric power (elec. model)	kW	8,77
Electric consumption	** kWh/l	1,05
Nominal airflow	m ³ /h	1.200
CONNEXIONS		
Tension 400V - III + N + T (50 Hz)	Nº x mm ² / A	5 x 4 / 20
Heat pump inlet (cooling)	BSP	1/2"
Heat pump outlet (cooling)	BSP	1/2"
Drain	BSP	3/4"
DIMENSIONS / DIMENSIONS WITH PACKAGING		
Net width / Gross width	mm	890 / 970
Net depth / Gross depth	mm	1.590 / 1.720
Net height / Gross height	mm	1.812 / 1.940
Net weight / Gross weight	Kg	380 / 395
OTHERS		
Noise level	dB	64

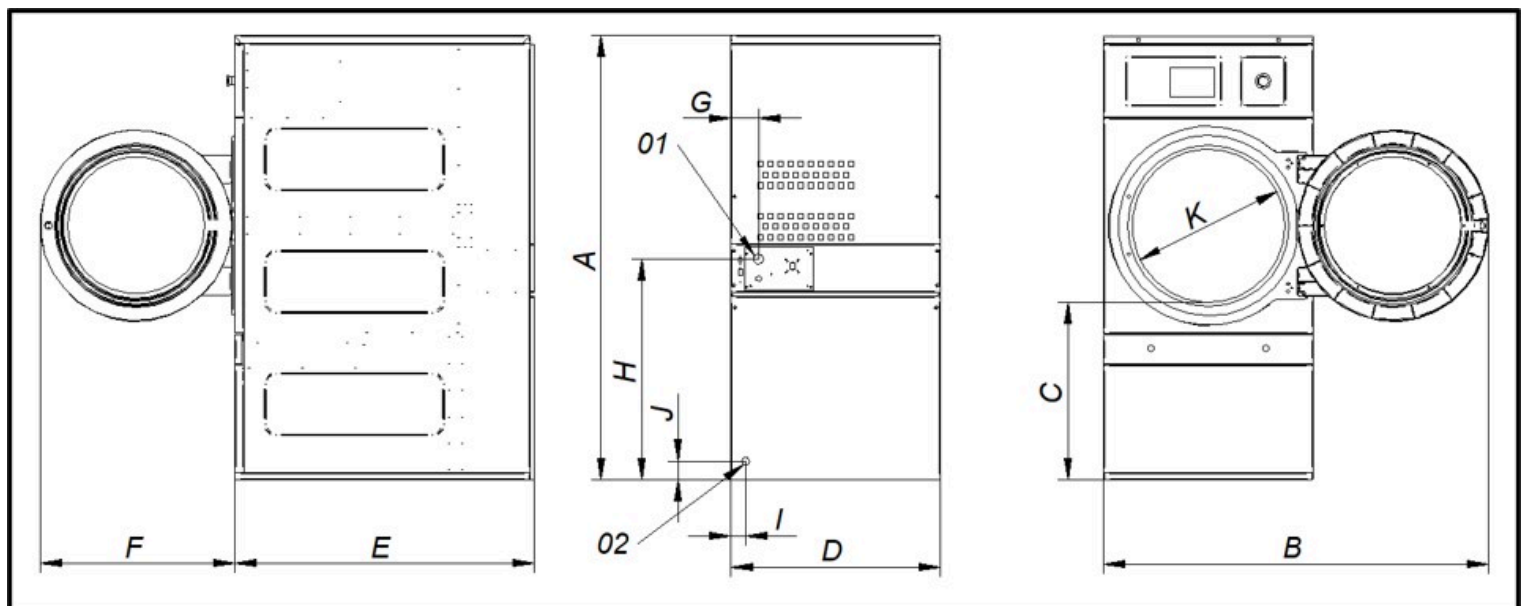

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DEB-11 HP EXCELLENCE	1.694	1.447	689	1.190	392	785	1.255	735	700	75	205	575	67	197
DEB-17 HP EXCELLENCE	1.694	1.447	689	1.190	392	785	1.525	735	700	75	205	575	67	197
DEB-23 HP EXCELLENCE	1.812	1.552	743	1.190	445	890	1.595	735	700	127	205	575	119	250

