



Primer

DEB-17 HP EXCELLENCE

EXCELLENCE Heat pump tumble dryers



T2 CONTROL

User friendly and totally programmable Touch II with 7" coloured touch screen.
USB Connection. Online platform free of charge for programming, telemetry, data analysis, etc. thanks to the IoT.
Videos on displays (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.



EFFICIENCY

DOUBLE FLOW: Mixed axial-radial airflow.
SMART DRY: Smart humidity sensor.
Big fluff filter.
Double door glass.
Low energy consumption.



VERSATILITY

Make to order - customisation.
WET CLEANING.
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior.



CONNECTIVITY

PRIMERLINK: IoT connectivity as standard.
Management of laundries: OPL and COIN.
Remote payment.



ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site.




EASY MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



OTHERS

Grey skinplate outer casing, stainless steel look.
EFFICIENT DRUM: new drum with stamped holes.
COOL DOWN: anti-wrinkle at the end of the cycle.
LINT FILTER: new filter drawer with wide surface.
CE approved.

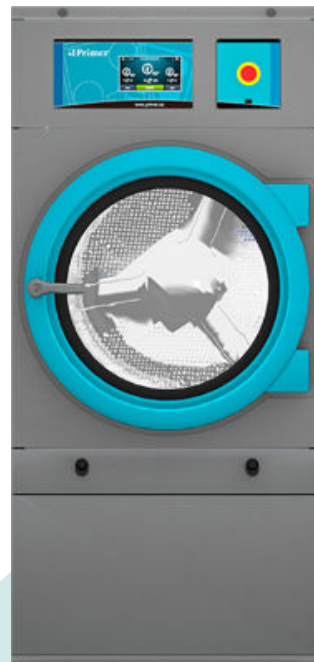

OPTIONS

- License IoT - PrimerLink
- NG gas option (Natural)
- Opposite door opening
- Tropicalized model
- Stainless steel front and side panels DEB-17 HP
- Front panel in stainless steel DEB-11/17 HP
- Maritime wooden packing DEB-17 HP
- 230 V | 50 Hz HP
- 230 V | 60 Hz HP
- Several payment systems for self-service

| TECHNICAL DATA | UNIT. | DEB-17 HP EXCELLENCE |
|---|--------------------------|----------------------|
| Capacity 1/18 | Kg | 18 |
| Capacity 1/20 | Kg | 17 |
| Capacity 1/30 | Kg | 11 |
| Hourly Output* | Kg/h | 18,9 |
| Evaporation capacity* | l/h | 9,5 |
| DRUM | | |
| Ø Drum | mm | 750 |
| Drum lenght | mm | 746 |
| Drum volume | l | 330 |
| Ø Loading door | mm | 574 |
| POWER | | |
| Drum motor power | kW | 0,37 |
| Fan motor power | kW | 0,55 |
| Electric heating power ALL RANGES | kW | 3,8 + 4*** |
| Total electric power (elec. model) | kW | 8,77 |
| Electric consumption | ** kWh/l | 1,17 |
| Nominal airflow | m ³ /h | 1.200 |
| CONNEXIONS | | |
| Tension 400V - III + N + T (50 Hz) | Nº x mm ² / A | 5 x 4 / 20 |
| Heat pump inlet (cooling) | BSP | 1/2" |
| Heat pump outlet (cooling) | BSP | 1/2" |
| Drain | BSP | 3/4" |
| DIMENSIONS / DIMENSIONS WITH PACKAGING | | |
| Net width / Gross width | mm | 785 / 865 |
| Net depth / Gross depth | mm | 1.525 / 1.650 |
| Net height / Gross height | mm | 1.694 / 1.840 |
| Net weight / Gross weight | Kg | 357 / 372 |
| OTHERS | | |
| Noise level | dB | 64 |

