



Primer

C-260/32 EXCELLENCE P

Flatwork ironers Ø 325 EXCELLENCE

ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.
Digital speed and temperature display.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable).
Fumes circulation circuit from the bottom reducing energy consumption.
Radiant gas burners: 25% more productive.

ROBUSTNESS

Roll driving by speed inverter.
Nomex quality feeding and ironing belts: high temperatures resistant.
Panels in skinplate and stainless steel.
Coiled felt for greater lifespan.
Option: Nickel plating roll as option: anticorrosive, more durable.

ERGONOMICS


Acoustic comfort : <63 dB.
Appropriate operating height: 990 mm.
Minimal encumbrance: space saving, suitable for most spaces.
Electronic control with Auto mode: easy to use, optimized ironing speed.

EASY MAINTENANCE

Easy access to all components on both sides of the machine.
A single electrical connection and fume outlet.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.
Front feeding and return.
Built-in Cool Down system.
Polished steel roll Ø 325 mm.
Roll length:
• 2000 mm (C-200/32 P)
• 2600 mm (C-260/32 P)
• 3300 mm (C-330/32 P)
Electric or radiant gas heating.
CE standard.

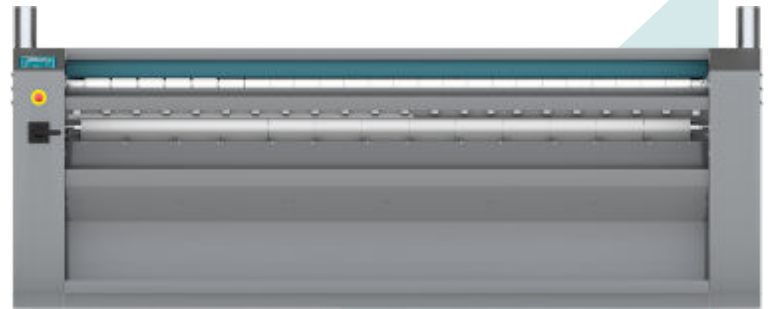




OPTIONS

- SMART IRON: humidity control
- Nickel Plated roll C-260/32
- Maritime wooden packing for C-260/32
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- 230V I N 50Hz GAS C-260/32 EXCELLENCE
- 230V I N 60Hz GAS C-260/32 EXCELLENCE
- 230V 3~ 50/60Hz C-260/32 EXCELLENCE (electric)
- 440V 3~ 50/60Hz C-260/32 EXCELLENCE (marine) (electric)

GENERAL DETAILS	UNIT.	C-260/32 EXCELLENCE P	
Theoretical production Electric heating*	Kg/h	60	
	lb/h	132	
Theoretical production Gas atmo heating*	Kg/h	N/A	
	lb/h	N/A	
Theoretical production Radiant gas heating*	Kg/h	75	
	lb/l	165	
Roll Ø	mm	325	
	inch	12,80	
Working width	mm	2.600	
	inch	102,4	
Height floor-feeding belts	mm	990	
	inch	39,0	
Working speed	m/min	1,5-12	
	ft/min	4.9-39	
Electronic control	-	YES	
No. Programs	-	2	
Length folder	-	N/A	
Large surface contact with linen	-	270°	
POWER			
Electric mod.: heating power	Kw	40,5	
Electric mod: Total electric power	Kw	41,02	
Gas mod.: heating power	Kw	55	
Gas mod.: total electric power	Kw	0,77	
Steam mod.: heating power	Kg/h	-	
Roll motor power	Kw	0,41	
Fan motor power	Kw	0,18 x 2	
CONNECTIONS		E	G
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 6A
	nº x AWG/A	N/A	3 x 13 / 6A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 125A	4 x 2,5 / 6A
	nº x AWG/A	4 x 3 / 100A	3 x 13 / 6A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	5 x 2,5 / 6A
	nº x AWG/A	5 x 5 / 63A	5 x 13 / 6A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	-	
Ø Condensed (Steam models)	BSP	-	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	3.202 / 3.430	
	inch	126,1 / 135,0	
Net depth / gross depth	mm	686 / 770	
	inch	27 / 30,3	
Net height / gross height	mm	1.112 / 1.400	
	inch	43,8 / 55,1	
Net weight / gross weight	kg	545 / 585	
	lbs	1.202 / 1.290	
Net volume / Gross volume	m³	2,44 / 3,70	
	f³	86,26 / 130,58	
OTHERS			
No. Fume outlet	Nº	2	
Ø Fume outlet	mm	98	
	inch	3,86	
Air Flow	m³/h	1.000	
	cfm	589	
Sound level	dB	63	
Evaporation power	l/h	34	
	USgallon/h	8,9	
Additional ELECTRIC POWER with folder option	-	-	



* 45% moisture

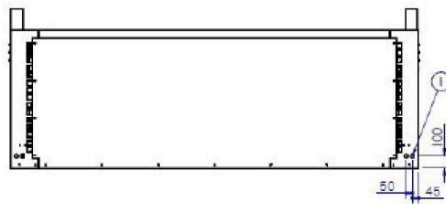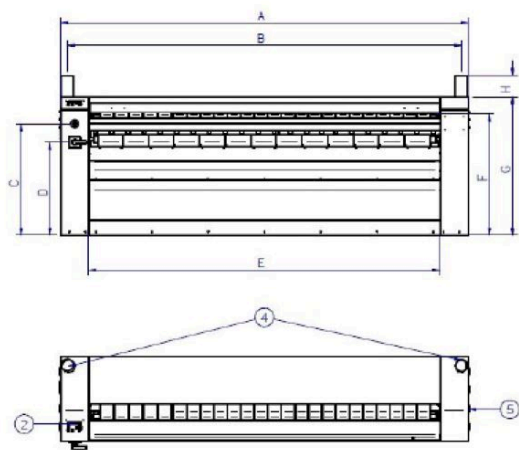

- 01. Electrical connection
- 02. BM Control
- 03. Emergency stop
- 04. ø 98 mm extraction
- 05. Crank
- 06. Main switch

	A	B	C	D	E	F	G	H	I	J
C-200/32 P	2.552	2.446	900	750	2.110	980	1.112	140	746	686
C-260-32 P	3.202	3.096	900	750	2.760	980	1.112	140	746	686
C-330/32 P	3.852	3.746	900	750	3.410	980	1.112	140	746	686