



# Primer

## C-260/32 EXCELLENCE P

## Flatwork ironers Ø 325 EXCELLENCE

### ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.  
Digital speed and temperature display.

### EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.  
Automatic shutdown at 80°C (adjustable).  
Fumes circulation circuit from the bottom reducing energy consumption.  
**Radiant gas burners: 25% more productive.**

### ROBUSTNESS

Roll driving by speed inverter.  
Nomex quality feeding and ironing belts: high temperatures resistant.  
Panels in skinplate and stainless steel.  
Coiled felt for greater lifespan.  
Option: Nickel plating roll as option: anticorrosive, more durable.

### ERGONOMICS


Acoustic comfort : <63 dB.  
Appropriate operating height: 990 mm.  
Minimal encumbrance: space saving, suitable for most spaces.  
Electronic control with Auto mode: easy to use, optimized ironing speed.

### EASY MAINTENANCE

Easy access to all components on both sides of the machine.  
A single electrical connection and fume outlet.

### OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.  
Front feeding and return.  
Built-in Cool Down system.  
Polished steel roll Ø 325 mm.  
Roll length:  
• 2000 mm (C-200/32 P)  
• 2600 mm (C-260/32 P)  
• 3300 mm (C-330/32 P)  
Electric or radiant gas heating.  
CE standard.

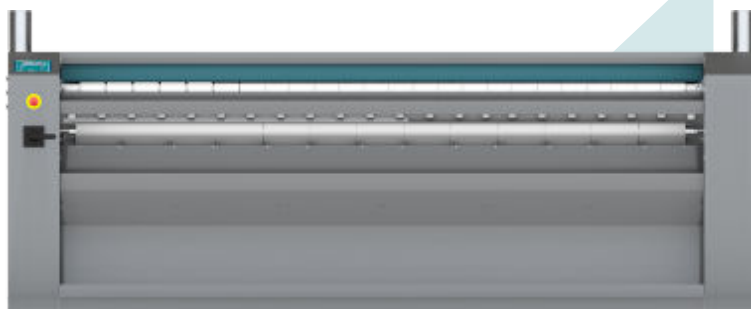




### OPTIONS

- SMART IRON: humidity control
- Nickel Plated roll C-260/32
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- 230 V I N 50 Hz gas C-260/32 EXCELLENCE
- 230 V I N 60 Hz gas C-260/32 EXCELLENCE
- 230 V III 50-60 Hz electric C-260/32 EXCELLENCE
- 440 V III 50-60 Hz electric maritime C-260/32 EXCELLENCE

GENERAL DETAILS	UNIT.	C-260/32 EXCELLENCE P	
Theoretical production*	Kg/h	60	
	Lb/h	132	
Radiant gas theoretical production*	Kg/h	75	
	Lb/h	165	
Evaporation power	l/h	34	
	USgallon/h	8,9	
Roll Ø	mm	325	
	inch	12,80	
Working width	mm	2.600	
	inch	102,4	
Height floor-feeding belts	mm	990	
	inch	39	
Working speed	mt/min	1,5 - 12	
	ft/min	4,9 - 39	
Electronic control	-	YES	
No. Programs (BM Modes)	Nº	2	
POWER			
Heating power	kW	40,50	
Total electric power	kW	41,02	
Gas heating	kW	55	
Total electric power (gas mod.)	kW	0,52	
Roll motor	kW	0,37	
Fan motor	kW	0,12 x 2	
CONNECTIONS		E	G
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 6A
	nº x AWG/A	-	3 x 13 / 6A
Tension 230V III + T	nº x mm²/A	4 x 25 / 125A	4 x 2,5 / 6A
	nº x AWG/A	4 x 3 / 100A	3 x 13 / 6A
Tension 400V III + N + T	nº x mm²/A	5 x 16 / 63A	5 x 2,5 / 6A
	nº x AWG/A	5 x 5 / 63A	5 x 13 / 6A
Ø Gas inlet	BSP	1/2"	
DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	3.202 / 3.430	
	inch	126,1 / 135	
Net / gross depth	mm	686 / 770	
	inch	27 / 30,3	
Net / gross height	mm	1.112 / 1.400	
	inch	43,8 / 55,1	
Net / gross weight	Kg	545 / 585	
	Lb	1202 / 1290	
Volume	m³	2,44 / 3,70	
	ft³	86,26 / 130,58	
OTHERS			
No fume outlet	Nº	2	
Ø Extraction	mm	98	
	inch	3,86	
Airflow	m³/h	1.000	
	cfm	589	
Sound level	dB	63	

\* 45% moisture



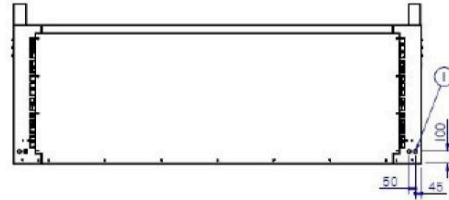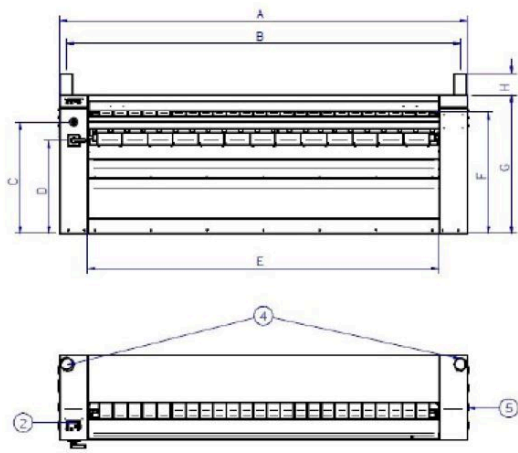

- 01. Electrical connection
- 02. BM Control
- 03. Emergency stop
- 04. ø 98 mm extraction
- 05. Crank
- 06. Main switch

	A	B	C	D	E	F	G	H	I	J
C-200/32 P	2.552	2.446	900	750	2.110	980	1.112	140	746	686
C-260-32 P	3.202	3.096	900	750	2.760	980	1.112	140	746	686
C-330/32 P	3.852	3.746	900	750	3.410	980	1.112	140	746	686