



Primer

C-200/50 T2

Flatwork ironers Ø 500 EXCELLENCE



T2 CONTROL

PRIMERLINK - IoT connectivity as standard.

7" touch screen fully programmable.

37 available languages, 5 preset programs.

USB connection. Free Software online for programming, telemetry, data analysis.

Reversing roll as standard.



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.


Automatic shutdown at 80°C (adjustable).

Fumes circulation circuit from the bottom reducing energy consumption.

Model with gas radiant burners: +25% productive.

SMART IRON: automatic regulation of ironing speed according to residual moisture (option).

High production system: ironing speed up to 15 m/min (option).

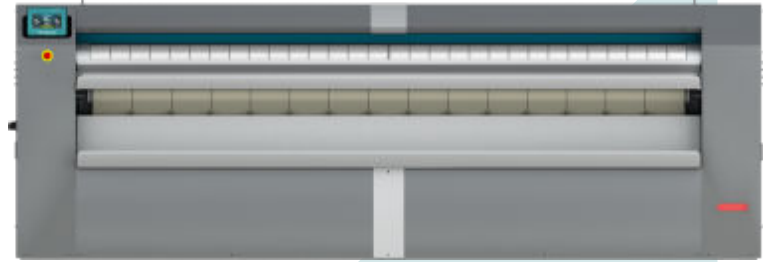

ROBUSTNESS

Roll driving by speed inverter.

Nomex quality ironing belts: high temperatures resistant.

Panels in Skinplate and stainless steel.

Nickel plate roll: anticorrosive, more durable (option).



ERGONOMICS

Acoustic comfort : <65 dB.

Appropriate operating height: 1120 mm feeding belts.

Compact dimensions.



EASY MAINTENANCE

Easy access to all components on both sides of the machine.

Complete technical menu: statistics, autotest, data recovery for technician and maintenance.

Remote communication: quicker intervention.



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.

Front feeding and return.

Built-in cool down system.

Polished steel roll Ø 500 mm.

Roll length:

• 2000 mm (C-200/50)

• 2600mm (C-260/50)

• 3300mm (C-330/50).

Electric, radiant or atmospheric gas, steam heating.

CE standard.

OPTIONS


- SMART IRON: humidity control
- HPS - HIGH PRODUCTION SYSTEM
- Nickel Plated roll C-200/50 E/G
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder C-200/50 (front exit)
- Rear exit C-200/50 (only with folder)
- Cross folder Ø 500-650 C-200
- Antistatic belts for C-200/50 ironers without folder
- Antistatic belts + bar for C-200/50 ironers with folder
- Maritime wooden packing for C-200/50
- 230 V III 50-60 Hz C-200/50 E
- 230 V III 60 Hz C-200/500 G
- 440 V III 50-60 Hz C-200/500 E
- 120 V I N 60 Hz Gas C-200/500 (Gas US)

GENERAL DATA	UNIT.	C-200/50 T2	
Electric or steam theoretical production*	Kg/h	68	
	Lb/h	150	
Atmo. gas theoretical production*	Kg/h	68	
	Lb/h	150	
Radiant gas theoretical production*	Kg/h	82	
	Lb/h	181	
Evaporation power	l/h	37	
	USgallon/h	9,7	
Roll Ø	mm	500	
	inch	19,69	
Working length	mm	2.000	
	inch	78,74	
Height floor-feeding belts	mm	1.120	
	inch	44,09	
Working speed	mt/min	0,5 - 8	
	ft/min	1,6 - 26	
Electronic control	-	YES	
No. Programs	Nº	5	
Surface contact with linen	º	310	
Length folder + rear exit	-	OPT.	
Elec/steam theoretical production* with folder	Kg/h	54	
	Lb/h	119	
Atmo. gas theoretical production* with folder	Kg/h	54	
	Lb/h	119	
Radiant gas theoretical production* with folder	Kg/h	65	
	Lb/h	119	
Evaporation power with folder	l/h	29	
	USgallon/h	7,7	
Working speed with folder	mt/min	2 - 8	
	ft/min	6,5 - 26	
POWER			
Electric heating	Kw	31,50	
Total electric power (elec. mod.)	Kw	32,12	
Gas heating	Kw	40	
Total electric power (gas mod.)	Kw	0,62	
Steam heating	Kw	50	
Total electric power (steam mod.)	Kw	0,62	
Roll motor power	Kw	0,37	
Fan motor power	Kw	0,25	
Additional electric power with folder option	Kw	0,56	
Additional electric power folder + rear exit option	Kw	0,74	
CONNECTIONS		E	G / S
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 10A
	nº x AWG/A	-	3 x 13 / 10A
Tension 230V III + T	nº x mm²/A	4 x 25 / 100A	4 x 2,5 / 10A
	nº x AWG/A	4 x 3 / 100A	4 x 13 / 10A
Tension 400V III + N + T	nº x mm²/A	5 x 16 / 63A	5 x 2,5 / 10A
	nº x AWG/A	5 x 5 / 63A	5 x 13 / 10A
Ø Gas inlet	BSP	1"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	2.845 / 3.145	
	inch	112 / 123,8	
Net / gross depth	mm	1.070 / 1.153	
	inch	42,1 / 45,4	



Net / gross depth with rear exit	mm	1.074 (1.417**) / 1.153
	inch	42,3 (55,8**) / 45,4
Net / gross height	mm	1.420 / 1.672
	inch	55,9 / 65,8
Net / gross weight	Kg	930 / 972
	Lb	2.050 / 2.143
Net / gross weight with folder	Kg	1.140 / 1.182
	Lb	2.513 / 2.606
Net / gross volume	m ³	4,32 / 6,06
	ft ³	153 / 214
Net / gross volume with folder	m ³	4,55 (5,72**) / 6,06
	ft ³	161 (202**) / 214
OTHERS		
Nº Fume outlet	Nº	1
Ø Extraction	mm	153
	inch	6
Airflow	m ³ /h	600
	cfm	353
Sound level	dB	65

Flatwork ironers Ø 500 EXCELLENCE

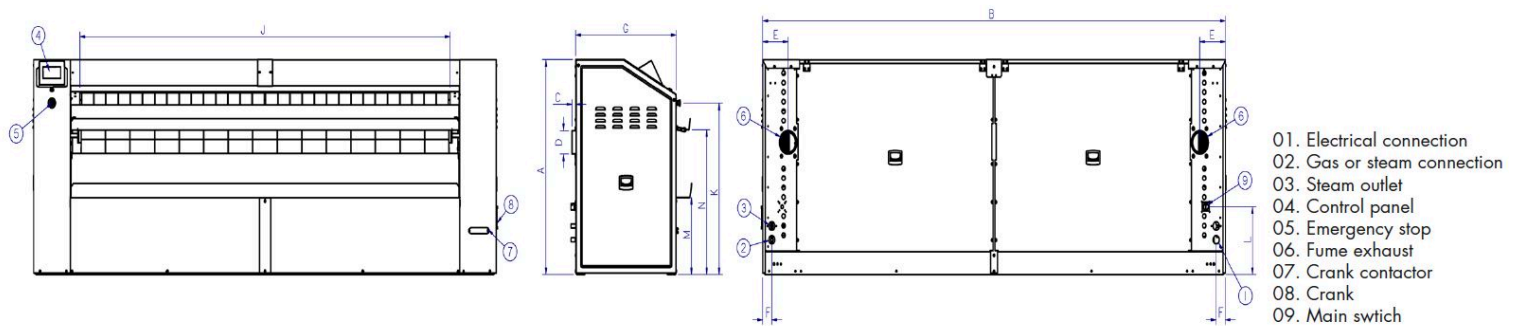

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-200/50	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
C-260/50	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
C-330/50	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952