



# Primer

## LS-11 T2

### High spin washers



## T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT Videos on display (ads, instructions, etc.)  
37 languages  
8 dosing signals as standard



## G FACTOR

High G-Factor: G-FACTOR 500 (11 - 18 kg), for 450 (22 - 80 kg) and 350 (100 - 120kg).  
It reduces the residual moisture.



## CONNECTIVITY

**PRIMERLINK** - Standard and free IoT connectivity. Remote technical service.  
Management for laundries: OPL and COIN.  
Remote payment: **App PRIMER LAUNDRY** (mod. LS-11 up to LS-45C).



## EFFICIENCY

Optimal KG.  
Intelligent consumption: automatic adjustment of water and soap consumptions (standard).  
Water Recovery tanks ready: **SAVETANK & SAVETANK XL**.  
Low water consumption.



## VERSATILITY

Make to order: customisation.  
OPL < > COIN (mod. LS-11 up to LS-45C).  
Electric < > Hot water.  
Drain valve < > Pump (LS-11-14).  
Wet Cleaning.



## ERGONOMICS

Easy opening/closing system for door lock.  
Biggest door diameters:  
• Ø 373 (11, 14 kg)  
• Ø 460 (18, 22, 28 kg)  
• Ø 560 (35, 45, 60, 80 kg)  
• Ø 700 (100, 120 kg)




## EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians.



## OTHERS

Grey skinplate outer casing.  
Drum and tub in stainless steel AISI 304.  
Detergent dispenser with 4 compartments.  
Electronic control of imbalance with frequency control.  
LOADING AID feature: water and rotation control.  
CB and WRAS approved product. Option ETL.  
REG4 standard certified by KIWA.

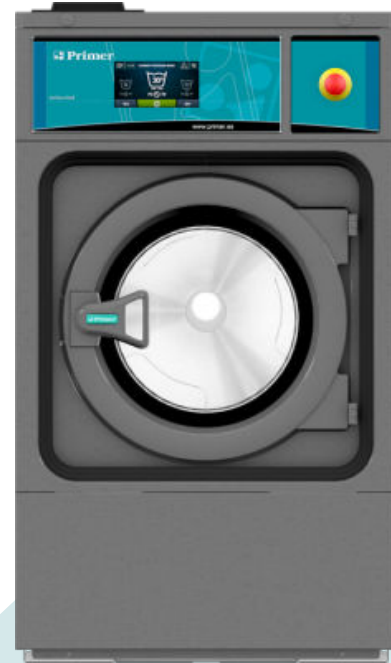

## OPTIONS

- License IoT - PRIMERLINK
- DQ-2 Dosing pump kit. 2 pumps with guide support.
- Extra detergent dosage DB-1
- 3" EXTERNAL double drain kit (recom. LS-11)
- Drain pump kit LS-11/14
- Ready for SAVETANK XL conn. 3/4" for washers LS/RS-11 to 28
- Normally closed valve LS-11
- Recirculation of bath water LS-11. Not with SAVETANK
- Leveling Feet LS-11-28
- Weighing system LS-11 to LS-45C
- 6 extra dosing signals card LS-11 to 45C
- Silicone door gasket LS-11/14
- Reversible door: reverse door opening
- Plinth MOPS with drawer LS-11 inox
- Tropicalized model (T2) LS-35C / 45C (standard 60 to 120)
- Steam kit LS-11/14/18/22
- Plinth MOPS with drawer LS-11 skinplate
- Stainless steel plinth LS-11 to level all machines from top
- skinplate plinth LS-11 to level all machines from top
- Door base alignment plinth at 850mm in stainless steel LS-11
- Door base alignment plinth at 850mm on skinplate LS-11
- Stainless steel AISI 304 outer casing for LS-11
- Stainless steel AISI 304 front and top panel for LS-11
- 440V 3~ (No N) 50/60 Hz LS-11 (marine)
- Kit watermark Australia
- Several payment systems for self-service

TECHNICAL DATA	UNIT.	LS-11 T2	
<b>DRUM</b>			
Load capacity 1:9 / 1:10	Kg	11/10	
Volume	l	100	
	gal	26,4	
Diameter	mm	532	
	inch	20,9	
Depth	mm	425	
	inch	16,7	
<b>GENERAL DATA</b>			
Washing speed / Spin speed	r.p.m.	50/1.300	
G factor	-	500	
Maximum transmitted force	KN	2,08 ±0,75	
Dynamic force frequency	Hz	16,7	
Sound level	dB	< 70	
Self-service version	-	YES	
Double drain	-	NO	
Weighing system / Tilting system	-	OPT./NO	
SLUICE option	-	NO	
<b>DOOR</b>			
Door centre height / Door base height	mm	630/370	
	inch	24,8"/14,5"	
Diameter	mm	373	
	inch	14,6"	
<b>POWER</b>			
Motor	kW	0,75	
Electric heating (electric model)	kW	6	
Maximum electric power	kW	6,25	
Max. power steam & hot water model	kW	0,75	
<b>CONNECTIONS</b>		<b>E</b>	<b>HW/S</b>
Voltage 110V - 1 + N + E	Nº x mm <sup>2</sup> / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm <sup>2</sup> / A	3x6 / 40A	3x1,5 / 16A
	Nº x AWG / A	3x9 / 35A	3x14 / 15A
Voltage 230V - 3 + E	Nº x mm <sup>2</sup> / A	4x2,5 / 20A	-
	Nº x AWG / A	4x13 / 20A	-
Voltage 400V - 3 + N + E	Nº x mm <sup>2</sup> / A	5x1,5 / 16A	-
	Nº x AWG / A	5x15 / 15A	-
Steam inlet (steam model)	inch	1/2"	
Max. steam consumption (steam model)	Kg/h	7	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm <sup>2</sup>	2-4	
Max. water consumption*	Lit/h	71,4*	
	GPH	18,8*	
Drain	mm/inch	3"	
Drain capacity	Lit/min	200	
	GPM	52,8	
<b>DIMENSIONS / PACKED DIMENSIONS</b>			
Net width / Gross width	mm	692 / 738	
	inch	27,2"/29"	
Net depth / Gross depth	mm	830 / 975	
	inch	32,6"/38,3"	
Net height / Gross height	mm	1.185 / 1.440	
	inch	46,6"/56,69"	
Net weight / Gross weight	kg	198 / 230	
	lb	436,5/507	




Packing volume	m3	1,03
	ft3	36,3

Programme no.20, 75% load

\*\*Programme no.2, 100% load

\*\*\* 400V version = 48kW / 230V = 36kW

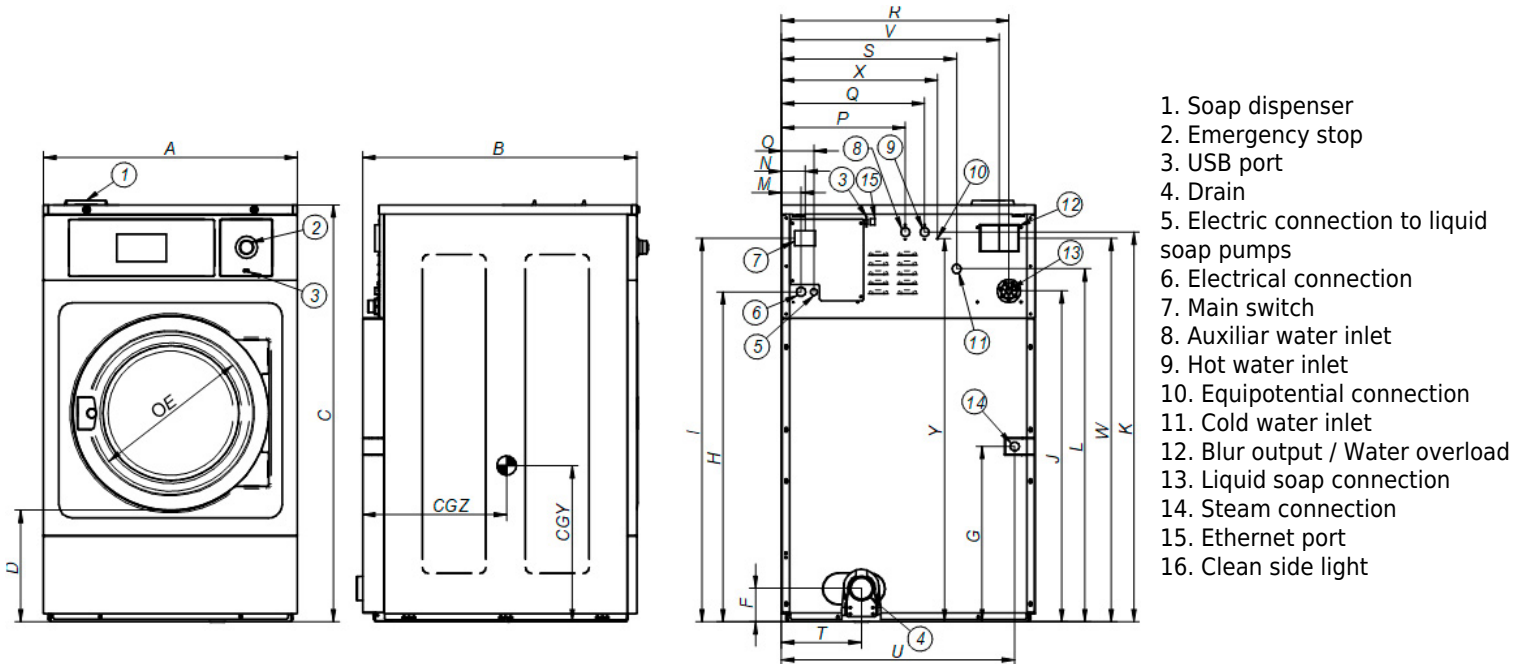

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LS-11 mm	692	830	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	292	352	610	448	226	626	580	1.080	442	1.145	424	577
inch	27,24	32,68	46,65	14,57	14,69	4,92	13,94	35,94	42,72	36,06	43,31	38,78	2,40	2,91	3,98	11,50	13,86	24,02	17,64	8,90	24,65	22,83	42,52	17,40	45,08	16,69	22,72

