



Primer

DP-10 T2 HPi HPi Professional tumble dryers with HEAT PUMP

OUTSTANDING FEATURES

T2 microprocessor: easy to use and fully programmable with 4.3" touch screen.
Frequency control standard.
Reverse drum action standard.
USB port.
Remote connection.

VERSATILITY

OPL<>COIN
The same model can be easily transformed.
Ideal for many sectors: hotels, camp sites, self-service laundries, gyms, etc.

EFFICIENCY

SMART DRY: humidity sensor.
Improved air flow system.
Large debris filter as a drawer.
Efficient design.

CONNECTIVITY

PRIMERLINK: IoT connectivity as standard.
Management for laundries: OPL and self-service.

ROBUSTNESS

Outdoor unit in grey skinplate.
Robust aluminium door.
Drawer as a dirt filter (not in the door but in a dedicated drawer).
Industrial fan and powerful airflow.
More robust construction of structure and panels.

OTHERS


Fluff filter as drawer, not in the door.
CE-certified



OPTIONS

- License IoT - Primer Link
- PRIMER LAUNDRY App - Self service (iOS / Android)
- Reverse door opening
- Outer casing stainless steel AISI 430 for HPi
- Tropicalized model: protected board (T2)
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DP-10 T2 HPi
Capacity 1/18		Kg	11,1
		lb	24,5
Capacity 1/20		Kg	10
		lb	22
Ø Drum		mm	590
		inch	23,2
Drum length		mm	690
		inch	27,2
Drum volume		l	200
		cu ft	7,06
Ø Door hole		mm	480
		inch	18,9
Door center height		mm	918
		inch	36,1
Height from floor to bottom of door		mm	614
		inch	24,17
ELECTRIC HEATING			
Evaporation capacity		L/h	4,3
		US gallon/h	1,11
Hourly output		Kg/h	8,6
		lb/h	18,96
Installed heating power		kW	2
Installed electrical power		kW	2,74
GAS HEATING			
POWER AND VENTILATION			
Drum motor power		kW	0,17
Fan motor power		kW	0,17
Nominal air flow rate		m³/h	Variable
		cfm	Variable
Ø Fume exhaust		mm	-
Ø Fume exhaust		inch	-
HEAT EMISSION			
Maximum total heat emission		kW	0,3
		Btu/h	1075
Max. front heat emission		kW	0,2
		Btu/h	753
CONNECTIONS			
NET DIMENSIONS / D. WITH PACKING			
Net / gross width		mm	680 / 710
		inch	26,8 / 28
Net / gross depth		mm	784 / 832
		inch	30,09 / 32,8
Net height / gross height without heating		mm	1.400 / 1.520
		inch	55,1 / 59,8
Net / gross weight		Kg	178
		lb	392
OTHERS			
Sound level		dB	61

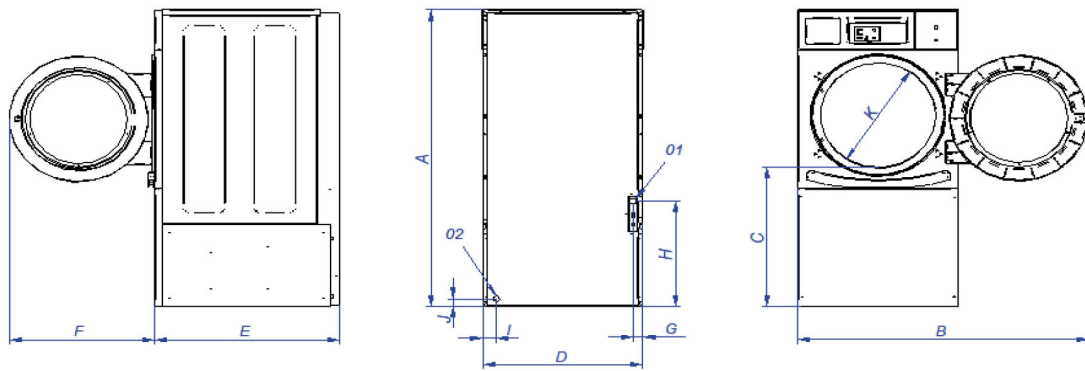

01. Electrical connection
 02. Condensed water evacuation
 3000mm hose (1) and 12mm
 diameter
 (1) For greater distances,
 consult the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
DP-8 T2 Hpi	mm	1.400	1.227	665	680	784	615	42	505	60	50	480
DP-10 T2 Hpi	mm	1.400	1.227	665	680	784	615	42	505	60	50	480