



Primer

LP-10 T2

Professional washers

OUTSTANDING FEATURES

High G FACTOR of 450.
 User-friendly and totally programmable T2 microprocessor with a 4,3" touch screen.
 8 dosing signals as standard.
 2 water inlets (cold and hot).
 Nettoyage humide standard avec le Touch II : les niveaux d'eau et la vitesse sont modifiables.
 Multi-payable systems.
 Short washing cycles (Heating Power 6 kW).
 Telemetry standard: all washing process (temperature water levels) is stored in the washer.

CONNECTIVITY

PRIMERLINK - Standard and free IoT connectivity.
 Remote payment: **APP PRIMER LAUNDRY**

VERSATILITY

OPL < > COIN: Standard model easily transformable.
 ELECTRIC < > HOT WATER: Standard electric model easily transformable to hot water model.
 PUMP < > DRAIN VALVE: Standard model easily transformable.
 SINGLE < > STACKED: Standard model easily stackable with a dryer.
 Prepared for the Wet Cleaning system.
 Suitable for many sectors: restaurants, gyms, campings, mop cleaning, apartments, coin laundries, dry cleaners, nurseries, etc.

EFFICIENCY

Intelligent weighing system: automatic adjustment of water and chemicals.
 Optimal KG: manual indication of the laundry weight.

ROBUSTNESS

Outer casing in grey skinplate.
 Robust aluminium door.
 AISI-304 stainless steel inner/outer drum and ribs.
 No inner drum seal (muffle), easy to repair/clean.
 Industrial house bearing and bearings (Up to 20,000 working hours) and possibility to replace bearings.
 Same motor and inverter as DOMUS industrial washers DHS.
 Industrial and heavy duty doorlock.

OTHERS

High spin washer extractor. Soft mounted.
 4 compartments soap dispenser.
 CE and WRAS approved product.
 REG4 standard certified by KIWA




OPTIONS

- License IoT - PrimerLink
- Detergent dosing pump kit DQ-2
- Extra detergent dosage DB-1
- Double drain kit LP 8/10 - Pump model only
- Transformation kit pump to valve
- Transformation kit drain valve to pump
- Silicone door gasket LP 8/10
- Reversible door: reverse door opening
- Tropicalized model
- Top soapbox for LP
- Card with 6 extra dosing signals for LP 8/10
- Normally closed valve
- Plinth for better ergonomics LP-DP
- Plinth stainless steel for better ergonomics LP-DP
- Plinth for mops LP 8/10
- Plinth for mops in stainless steel for LP 8/10
- Plinth for water recovery LP 8/10
- Plinth for water recovery in stainless steel LP 8/10
- AISI 304 Stainless steel outer casing
- Order in complete container + compact packing
- Auto unlock kit for the door LP
- 440 V III 50/60 Hz no N LP-8/10
- 110-120 V IN 50/60 Hz
- Several payment systems for self-service

| DRUM | UNIT. | LP-10 T2 | |
|---|--------------|---------------|---------------|
| Capacity 1/9 | Kg | 11 | |
| Capacity 1/10 | Kg | 10 | |
| Volume | l | 100 | |
| Diameter | mm | 532 | |
| Depth | mm | 425 | |
| GENERAL DETAILS | | | |
| Washing speed / Spining speed | r.p.m. | 50/1250 | |
| G Factor | - | 450 | |
| Maximum force transmitted | KN | 1,57±0,53 | |
| Frequency-dynamic force | Hz | 18,33 | |
| Noise level | dB | <70 | |
| Coin laundry version | - | YES | |
| Double drain | - | NO | |
| Weighing system / Tilting door | - | NO | |
| SLUICE option | - | NO | |
| DOOR | | | |
| Height center door / Height door | mm | 537/280 | |
| Diameter | mm | 373 | |
| POWER | | | |
| Motor | kW | 0,75 | |
| Electric heating power | kW | 6 | |
| Total electric power (electric model) | kW | 6,25 | |
| Total electric power (models: HW & steam) | kW | 0,75 | |
| CONNECTIONS | | E | HW/S |
| Tension 110 V I + N + T | Nº x mm² / A | - | 2x1,5+T - 16A |
| Tension 230 V I + N + T | Nº x mm² / A | 2x6+T - 40A | 2x1,5+T - 16A |
| Tension 230 V III + T | Nº x mm² / A | 3x2,5+T - 20A | - |
| Tension 400 V III + N + T | Nº x mm² / A | 4x1,5+T - 16A | - |
| Steam inlet (Steam model) | inch | NO | |
| Maximum steam consumption (Steam model) | Kg/h | - | |
| Water inlet | inch | 3/4" | |
| Water main pressuer | Kgs/cm² | 2-4 | |
| Maximum water consumption* | Lit/h | - | |
| Drain | mm/inch | 2" | |
| Drainage capacity | Lit/min | 140 | |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Gross width | mm | 680 | |
| Gross depth | mm | 742 | |
| Gross height | mm | 1040 | |
| Gross weight | Kg | 155 | |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Gross width | mm | 710 | |
| Gross depth | mm | 832 | |
| Gross height | mm | 1158 | |
| Gross weight | Kg | 166 | |
| Volume | m³ | 0,68 | |

* Program nº20, 75% load



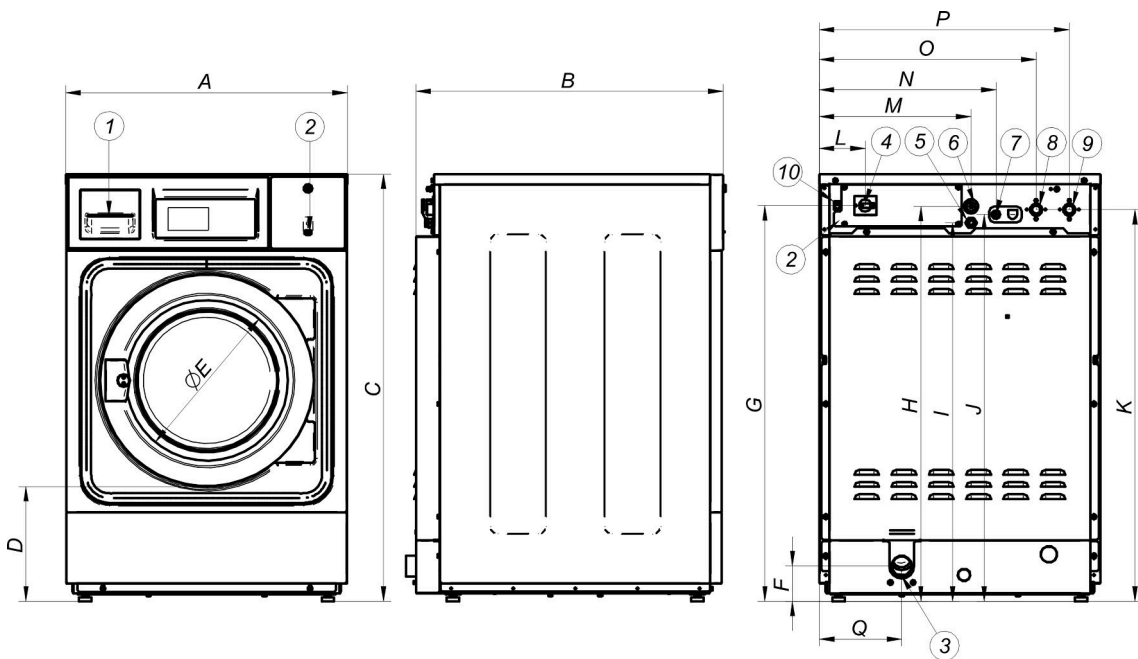

1. Soap dispenser
2. USB port
3. Drain *
4. Main switch
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Liquid soap connection
8. Cold water inlet
9. Hot water inlet
10. Ethernet port

| | | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q* |
|-------|------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|------|
| LP-10 | mm | 680 | 742 | 1.040 | 278 | 373 | 86 | 964 | 962 | 922 | 942 | 954 | 110 | 366 | 427 | 524 | 603 | 199 |
| | inch | 26,77 | 29,21 | 40,49 | 10,94 | 14,69 | 3,39 | 37,95 | 37,87 | 36,30 | 37,09 | 37,56 | 4,33 | 14,41 | 16,81 | 20,63 | 23,74 | 7,83 |

