Primer

LP-8 T2
Professional washers

OUTSTANDING FEATURES

High G FACTOR of 450.
User-friendly and totally programmable T2 microprocessor with a 4,3'' touch screen.
8 dosing signals as standard.
2 water inlets (cold and hot).
Nettoyage humide standard avec le Touch II : les niveaux d'eau et la vitesse sont modifiables.
Multi-payable systems.
Short washing cycles (Heating Power 6 kW).
Telemetry standard: all washing process (temperature water levels) is stored in the washer.

CONNECTIVITY

PRIMERLINK - Standard and free IoT connectivity.
Remote payment: **APP PRIMER LAUNDRY**

VERSATILITY

OPL < > COIN: Standard model easily transformable.
ELECTRIC < > HOT WATER: Standard electric model easily transformable to hot water model.
PUMP < > DRAIN VALVE: Standard model easily transformable.
SINGLE < > STACKED: Standard model easily stackable with a dryer.
Prepared for the Wet Cleaning system.
Suitable for many sectors: restaurants, gyms, campings, mop cleaning, apartments, coin laundries, dry cleaners, nurseries, etc.

EFFICIENCY

Intelligent weighing system: automatic adjustment of water and chemicals.
Optimal KG: manual indication of the laundry weight.

ROBUSTNESS

Outer casing in grey skinplate.
Robust aluminium door.
AISI-304 stainless steel inner/outer drum and ribs.
No inner drum seal (muffle), easy to repair/clean.
Industrial house bearing and bearings (Up to 20,000 working hours) and possibility to replace bearings.
Same motor and inverter as DOMUS industrial washers DHS.
Industrial and heavy duty doorlock.

OTHERS

High spin washer extractor. Soft mounted.
4 compartments soap dispenser.
CE and WRAS approved product.
REG4 standard certified by KIWA

OPTIONS

- License IoT - PRIMERLINK
- DQ-2 Dosing pump kit. 2 pumps with guide support.
- Extra detergent dosage DB-1
- Double drain kit LP 8/10 - valve model only
- Transformation kit pump to valve
- Transformation kit drain valve to pump
- Silicone door gasket LP 8/10
- Reversible door: reverse door opening
- Tropicalized model (T2)
- Top soapbox for LP
- Card with 6 extra dosing signals for LP 8/10
- Normally closed valve
- Plinth for better ergonomics LP-DP
- Plinth stainless steel for better ergonomics LP-DP
- Plinth for mops LP 8/10
- Plinth for mops in stainless steel for LP 8/10
- Plinth for water recovery LP 8/10
- Plinth for water recovery in stainless steel LP 8/10
- AISI 304 Stainless steel outer casing
- Auto unlock kit for the door LP
- 440 V III 50/60 Hz no N LP-8/10
- 110-120 V IN 50/60 Hz
- Several payment systems for self-service

TECHNICAL DATA	UNIT.	LP-8 T2	
DRUM			
Load capacity 1:9 / 1:10	Kg	9/8	
Volume	l	80	
	gal	21,1	
Diameter	mm	532	
	inch	20,9	
Depth	mm	360	
	inch	14,1	
GENERAL DATA			
Washing speed / Spin speed	r.p.m.	50/1250	
G factor	-	450	
Maximum transmitted force	KN	1,47±0,53	
Dynamic force frequency	Hz	18,33	
Sound level	dB	<70	
Self-service version	-	Yes	
Double drain	-	NO	
Weighing system / Tilting system	-	NO	
SLUICE option	-	NO	
DOOR			
Door centre height / Door base height	mm	537/280	
	inch	21,1"/11"	
Diameter	mm	373	
	inch	14,6"	
POWER			
Motor	kW	0,75	
Electric heating (electric model)	kW	6	
Maximum electric power	kW	6,25	
Max. power steam & hot water model	kW	0,75	
CONNECTIONS		E	HW/S
Voltage 110V - 1 + N + E	Nº x mm2 / A	-	3x1,5 / 16A
	Nº x AWG / A	-	3x15 / 15A
Voltage 230V - 1 + N + E	Nº x mm2 / A	3x6 / 40A	3x1,5 / 16A
	Nº x AWG / A	3x9 / 35A	3x15 / 15A
Voltage 230V - 3 + E	Nº x mm2 / A	4x2,5 / 20A	-
	Nº x AWG / A	4x13 / 20A	-
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x1,5 / 16A	-
	Nº x AWG / A	5x15 / 15A	-
Steam inlet (steam model)	inch	NO	
Max. steam consumption (steam model)	Kg/h	-	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm2	2-4	
Drain	mm/inch	2" (V) / 1" (P)	

Programme no.20, 75% load
**Programme no.2, 100% load
*** 400V version = 48kW / 230V = 36kW

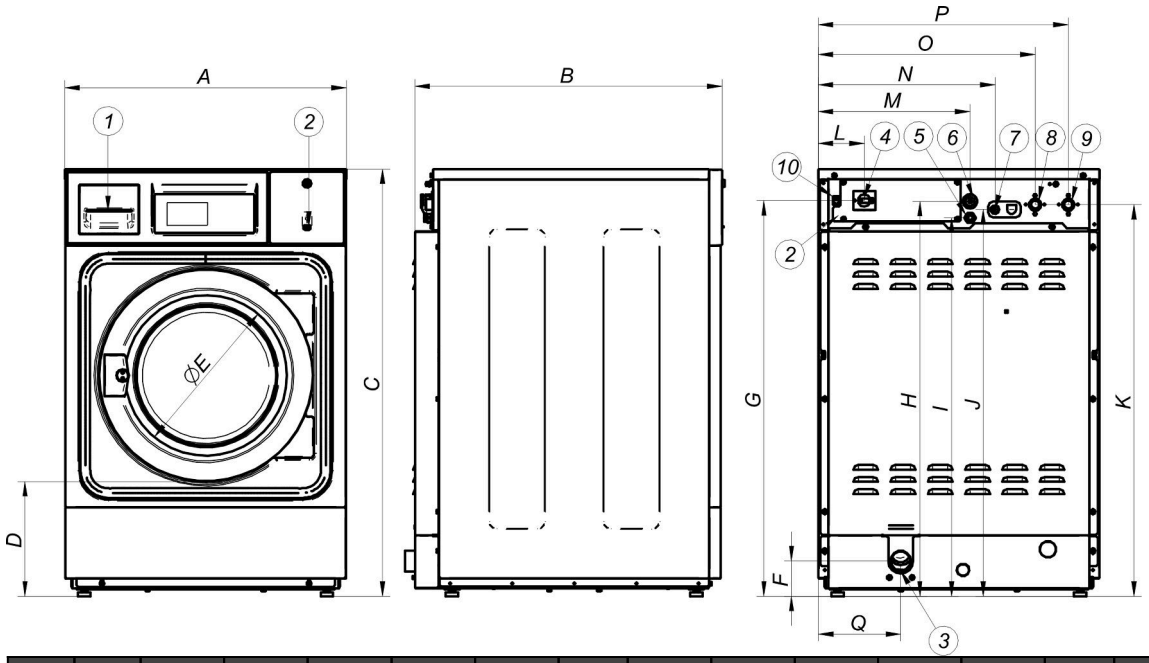

1. Soap dispenser
2. USB port
3. Drain *
4. Main switch
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Liquid soap connection
8. Cold water inlet
9. Hot water inlet
10. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q*
LP-8	mm	680	698	1.040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
	inch	26,77	27,48	40,49	10,94	14,69	3,39	37,95	37,87	36,30	37,09	37,56	4,33	14,41	16,81	20,63	23,74	7,83