



Primer

LCA-70 T2

Barrier washers 27-70 kg



T2 CONTROL

7" touch screen easy to use and fully programmable, display on dirty side.
 Screen on both sides of the machine.
 Connection USB. Free software online for programming, telemetry, data analysis, etc.
 37 languages.
 8 dosing signals as standard.



OUTSTANDING FEATURES

Automatic positioning of drum.
 2 water inlets.
 Wet Cleaning, telemetry standard.
 G-FACTOR 325 (100kg), 350 (16, 22kg), 375 (27, 35, 50, 70kg).
 Heating: electric, steam, and dual heating model (electric + steam).



EFFICIENCY

Intelligent consumption: automatic adjustment of water and soap consumptions (standard).
 Optimal loading: manual indication of weight.
 Water Recovery tanks ready: **SAVETANK XL**.
 Low water consumption.
 High G FACTOR: reduced residual moisture > reduced drying time.



CONNECTIVITY

IoT - PRIMERLINK standard.
 Remote technical service.
 Laundry management.



ERGONOMICS

Huge door opening making loading/unloading easier.
 Easy friendly drum opening by push button.
 Loading height (door base): Ø 640 (16, 22 kg), Ø 800 (27, 35, 50, 70 kg)




EASY MAINTENANCE

Electric components on the left side, mechanical components on the right side and connections on the top (protected from water and detergents).
 Central drain as standard.
 Technical menu: statistics, alarms, autotest, data recovery for technicians and maintenance.



OTHERS

2 opposed doors. Pass-through barrier washer.
 Ready to be connected to dosing pumps.
 Grey skinplate outer casing.
 Drum and vat in stainless steel AISI 304.
 Frequency inverter to control imbalance.
 CE approved product.

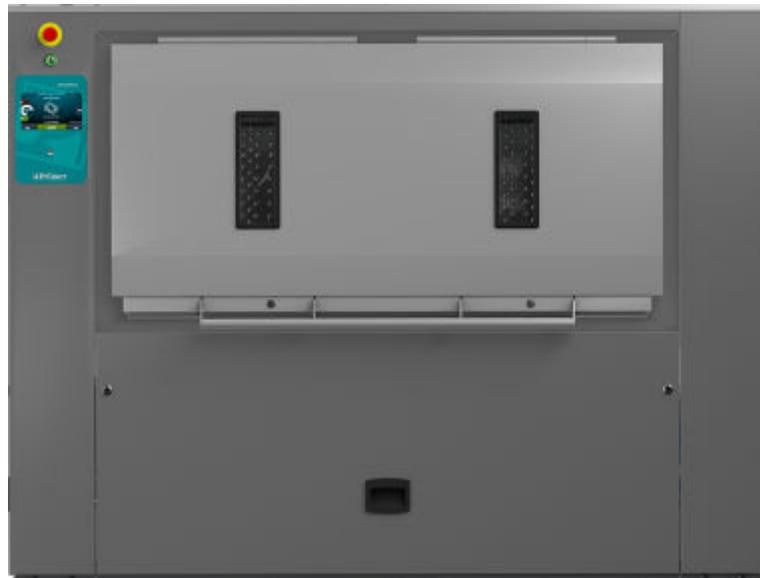


OPTIONS

- License IoT - Primer Link
- Version with one door LCA-70
- Weighing sensor system on feet LCA-70. Includes kit with 6 extra dosing signals
- 6 extra dosing signals card
- 2nd drain valve
- Inner door open sensor LCA-27/35/50
- Inner door open sensor LCA-70
- Ready for SAVETANK XL conn. 1" for barriers for LCA-70
- Water titration valve
- Side drain valve
- Low steam pressure
- 4 compartments detergent box
- UPS option (in case of power failure)
- End of cycle light alarm
- Plinth to align the doorbase at 850mm LCA-70
- Stainless steel AISI 304 outer casing for LCA-70
- Maritime wooden packing for LCA-70
- 230 V III 50/60 Hz LCA-70
- 440 V III 50/60 Hz (maritime)
- Stainless steel frame for LCA-70
- Stainl. steel frame LCA-70 equipped with loading base

| DRUM | UNIT. | LCA-70 T2 | |
|--------------------------------------|-------------------------|------------------|---------------|
| Load capacity 1:9 | Kg | 77,7 | |
| | lb | 171,3 | |
| Load capacity 1:10 | Kg | 70 | |
| | lb | 154,3 | |
| Volume | l | 694 | |
| | ft ³ | 24,51 | |
| Diameter | mm | 800 | |
| | inch | 31,5 | |
| Depth | mm | 1.380 | |
| | inch | 54,3 | |
| Drum compartments | - | 2 | |
| Pullman drum score | - | N/A | |
| GENERAL DETAILS | | | |
| Washing speed | rpm | 45 | |
| Spining speed | rpm | 920 | |
| G Factor | - | 375 | |
| Microprocessor ET2 | - | 7" | |
| Double screen | - | STD | |
| Motor break | - | STD | |
| Double drainage | - | OPT. | |
| DOOR | | | |
| Drum opening dimensions | mm | (2*) 640 x 515 | |
| | inch | (2*) 25.2 x 20.3 | |
| Vat opening dimensions | mm | 1402 x 650 | |
| | inch | 55.2 x 25.6 | |
| Height door bottom | mm | 800 | |
| | inch | 31,5 | |
| POWER | | | |
| Motor | kW | 7,5 | |
| Electric heating | kW | 45 | |
| Total electric power (elec mod) | kW | 52,5 | |
| Total electric power (hot water mod) | kW | 7,5 | |
| Total electric power (steam mod) | kW | 7,5 | |
| CONNECTIONS | | E/DUAL | S |
| Tension 230V I + N + T 50/60Hz | Nº x mm ² /A | N/A | N/A |
| Tension 230V III + T 50/60Hz | Nº x mm ² /A | 4 x 35 / 160A | 4 x 2,5 / 16A |
| Tension 400V III + N + T 50/60Hz | Nº x mm ² /A | 5 x 16 / 80A | 5 x 2,5 / 10A |
| Steam inlet (steam mod) | mm | 20 / 27 | |
| | inch | 3/4" | |
| Steam pressure | bar | 4 - 8 | |
| | psi | 58 - 116 | |
| Water inlet | mm | 26 / 34 | |
| | inch | 1" | |
| Water pressure | bar | 3 - 5 | |
| | psi | 43 - 72 | |
| Max. Water consumption* | Lit/h | 720 | |
| Drain | mm | 80 | |
| | inch | 3" | |
| Drain capacity | l/min | 200 | |
| | cfm | 5,65 | |
| COMPRESSED AIR | | | |
| Air inlet | mm | N/A | |
| | inch | N/A | |
| Air pressure | bar | N/A | |
| | psi | N/A | |



| | | |
|------------------------------------------------|-------|-------------------------|
| Air consumption | l/min | N/A |
| | cfm | N/A |
| OVERALL DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 2.124 (2.276**) / 2.310 |
| | inch | 83,6 (89,6**) / 90,9 |
| Net depth / Gross depth | mm | 1.195 / 1.300 |
| | inch | 47 / 51,2 |
| Net height / Gross height | mm | 1.615 / 1.720 |
| | inch | 63,6 / 67,7 |
| Net weight / Gross weight | kg | 1.190 / 1.220 |
| | lb | 2.624 / 2.689,6 |
| Volume | m3 | 5,17 |
| | ft3 | 182,4 |

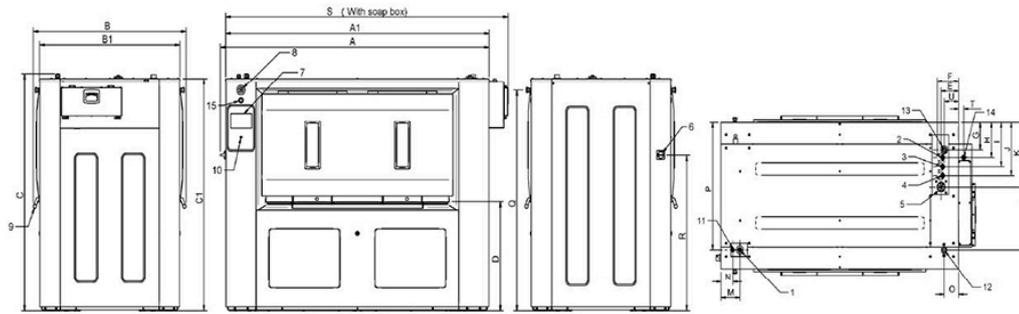

01. Electrical connexion
02. Cold water inlet
03. Soft water inlet
04. Hot water inlet
05. Liquid products inlet
06. Main switch
07. Control panel
08. Emergency stop
09. Door opening
10. USB port
11. Dosing pumps connexion
12. Steam inlet
13. Exhaust
14. Cold water for detergents box

| | A | B | C | A1 | B1 | C1 | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U |
|--------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|----|-----|
| LCA-70 | 2104 | 1196 | 1612 | 2061 | 1098 | 1581 | 745 | 152 | 138 | 206 | 263 | 330 | 397 | 482 | 956 | 163 | 103 | 126 | 956 | 1499 | 1059 | 2210 | 45 | 125 |