



P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanized drum as standard.
Frequency inverter as standard.

EFFICIENCY

Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS


Biggest door diameters.
Opening sense of door adjustable on site.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

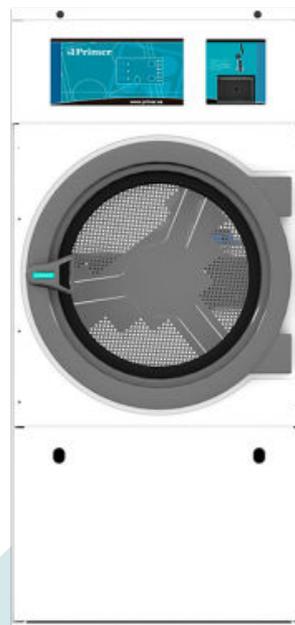


OPTIONS

- Opposite door opening 11 to 35
- Back panel with air filter 11 to 35
- NG gas option (Natural) for DL
- Display for P programmer
- 400 V III N 60 Hz
- 230 V III 50 Hz DL-11/14/18 E
- 230 V III 60 Hz DL-11/14/18 E
- 230 V III 60 Hz DL-11 to 35 G/S
- 230 V I N 50 Hz DL-11 E
- 440/480 V III 60 Hz DL-11/14/18
- Maritime wooden packing DL-11
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DL-11 P	
Capacity 1/18		Kg	11,7	
		lb	25,7	
Capacity 1/20		Kg	10,5	
		lb	23,1	
Ø Drum		mm	750	
		inch	29,53	
Drum length		mm	475	
		inch	18,70	
Drum volume		l	210	
		cu ft	7,41	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	976	
		inch	38,4	
Height from floor to bottom of door		mm	618	
		inch	24,33	
ELECTRIC HEATING				
Evaporation capacity		L/h	9,3	
		US gallon/h	2,46	
Hourly output		Kg/h	20,3	
		lb/h	44,8	
Installed heating power		kW	12	
Installed electrical power		kW	12,67	
GAS HEATING				
Evaporation capacity (gas model)		L/h	14,5	
		US gallon/h	3,830	
Hourly output (gas model)		Kg/h	29	
		lb/h	63,1	
Installed gas heating power		kcal/h	17627	
		Btu/h	69996	
Installed gas heating power		kW	20,5	
Installed electrical power		kW	0,67	
Instant propane gas consumption (G31)		Kg/h	1,76	
		lb/h	3,88	
Instant natural gas consumption (G20)		m ³ /h	2,17	
		cfm	1,28	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
POWER AND VENTILATION				
Drum motor power		kW	0,37	
Fan motor power		kW	0,25	
Nominal air flow rate		m ³ /h	850	
		cfm	500	
Ø Fume exhaust		mm	200	
Ø Fume exhaust		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	1,2	
		Btu/h	4097	
Max. front heat emission		kW	0,8	
		Btu/h	2868	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm ² / A	3 x 25 / 63A	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 10 / 40A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 4 / 25A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30,9 / 34,1	



Net / gross depth	mm	855 / 940
	inch	33,7 / 37
Net height / gross height without heating	mm	1.694 / 1.840
	inch	66,7 / 72,4
Net / gross weight	Kg	172 / 180
	lb	379 / 397
OTHERS		
Sound level	dB	64

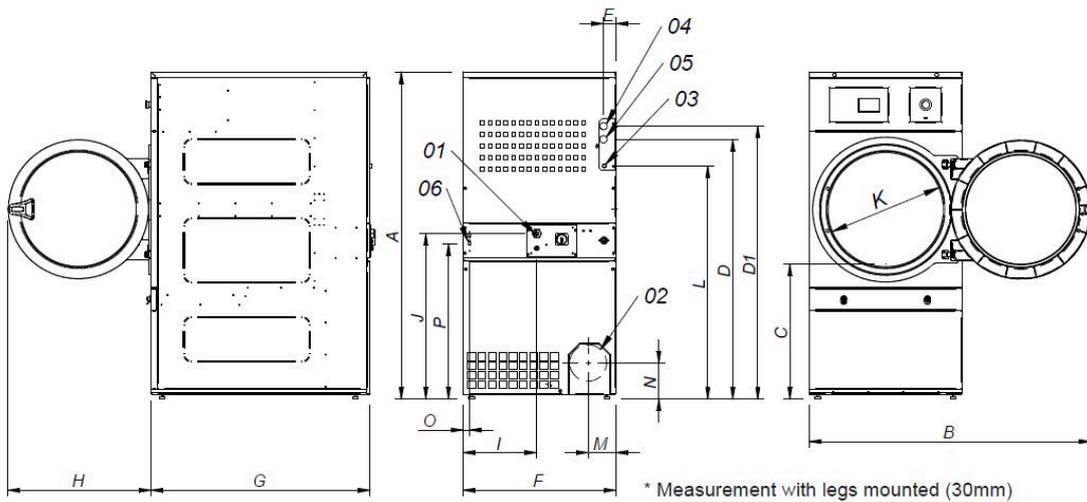

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 ETHERNET CONNECTION (only available CONTROL T2 models)

* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DL - 11	1694*	1447	689	1354	1422	68	68	785	855	735	380	870	575	1226	133	180	35	805
DL - 14	1694*	1447	689	1354	1422	68	68	785	989	735	380	870	575	1226	133	180	35	805

