



# Primer

## C-140/20 P

## Flatwork ironers Ø 200

### ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.  
Digital speed and temperature display.

### EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.  
Automatic shutdown at 80°C (adjustable).  
Fumes circulation circuit from the bottom reducing energy consumption.

### ROBUSTNESS

Roll driving by speed inverter.  
Nomex quality feeding and ironing belts: high temperatures resistant.  
Panels in Skinplate and stainless steel.  
Coiled felt for greater lifespan.

### ERGONOMICS


Acoustic comfort : <65 dB.  
Appropriate operating height: 990 mm.  
Minimal encumbrance: space saving, suitable for most spaces.  
Electronic control with Auto mode: easy to use, optimized ironing speed.

### EASY MAINTENANCE

Easy access to all components on both sides of the machine.  
A single electrical connection and mist outlet.

### OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.  
Front feeding and return.  
Built-in **Cool Down** system.  
Polished steel roll Ø 200 mm.  
Roll length:  
• 1400 mm (C-140/20 P)  
• 1600 mm (C-160/20 P)  
• 2000 mm (C-200/20 P)  
Electric heating.  
CE standard.

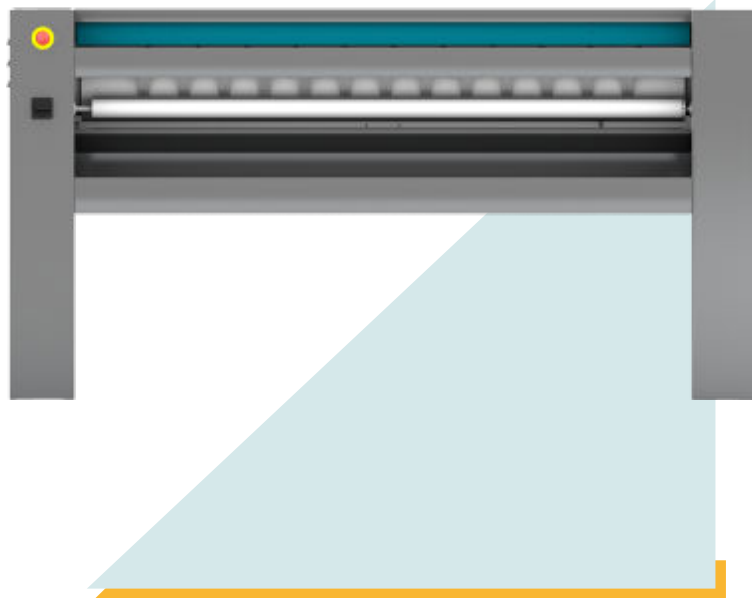

### OPTIONS


- 440 V III 50-60 Hz No N
- 230 V III 50-60 Hz
- Maritime wooden packing for C-140/20

GENERAL DETAILS	UNIT.	C-140/20 P
Theoretical production*	Kg/h	12
	lb/h	26
Evaporation power	l/h	5,4
	USgallon/h	1,4
Roll Ø	mm	200
	inch	7,87
Working width	mm	1.400
	inch	55,1
Height floor-feeding belts	mm	990
	inch	39
Working speed	mt/min	1,5 - 6
	ft/min	4,9 - 19,6
Electronic control	-	YES
No. Programs (BM Modes)	Nº	2
POWER		
Heating power	kW	10,50
Total electric power	kW	10,84
Roll motor	kW	0,28
Fan motor	kW	0,09
CONNECTIONS		
Tension 230V III + T	nº x mm²/A	4 x 6 / 32A
	nº x AWG/A	4 x 9 / 32A
Tension 400V III + N + T	nº x mm²/A	5 x 4 / 20A
	nº x AWG/A	5 x 11 / 20A
DIMENSIONS / PACKING DIMENSIONS		
Net / gross width	mm	1.878 / 2.130
	inch	73,9 / 83,9
Net / gross depth**	mm	444**(666) / 770
	inch	17,5 (26,2) / 30,3
Net / gross height	mm	1.110 / 1.400
	inch	43,7 / 55,1
Net / gross weight	Kg	180 / 220
	lb	397 / 485
Volume	m³	0,93 / 2,30
	ft³	32,76 / 81,09
OTHERS		
No fume outlet	Nº	1
Ø Extraction	mm	83
	inch	3,27
Airflow	m³/h	300
	cfm	177
Sound level	dB	55

\* 45% moisture

\*\* Rear fan disassembly



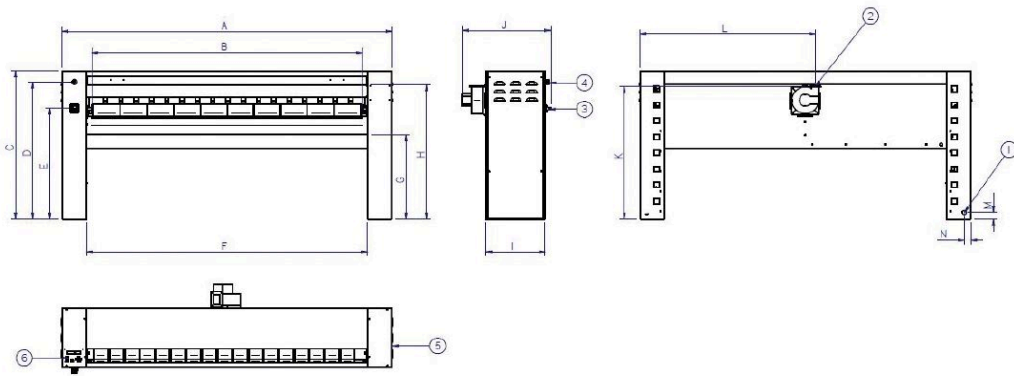

- 01. Electrical connection
- 02. Fume extraction
- 03. Main switch
- 04. Emergency stop
- 05. Crank
- 06. Electronic control

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-140/20 E P	1.878	1.470	1.110	1.028	830	1.510	631	1.006	444	666	995	1.016	50	50
C-160/20 E P	2.128	1.720	1.110	1.028	830	1.760	631	1.006	444	666	995	1.141	50	50
C-200/20 E P	2.478	2.070	1.110	1.028	830	2.110	631	1.006	444	666	995	1.316	50	50

