



Primer

C-160/20 P

Flatwork ironers Ø 200

ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.
Digital speed and temperature display.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable).
Fumes circulation circuit from the bottom reducing energy consumption.

ROBUSTNESS

Roll driving by speed inverter.
Nomex quality feeding and ironing belts: high temperatures resistant.
Panels in Skinplate and stainless steel.
Coiled felt for greater lifespan.

ERGONOMICS


Acoustic comfort : <65 dB.
Appropriate operating height: 990 mm.
Minimal encumbrance: space saving, suitable for most spaces.
Electronic control with Auto mode: easy to use, optimized ironing speed.

EASY MAINTENANCE

Easy access to all components on both sides of the machine.
A single electrical connection and mist outlet.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.
Front feeding and return.
Built-in **Cool Down** system.
Polished steel roll Ø 200 mm.
Roll length:
• 1400 mm (C-140/20 P)
• 1600 mm (C-160/20 P)
• 2000 mm (C-200/20 P)
Electric heating.
CE standard.

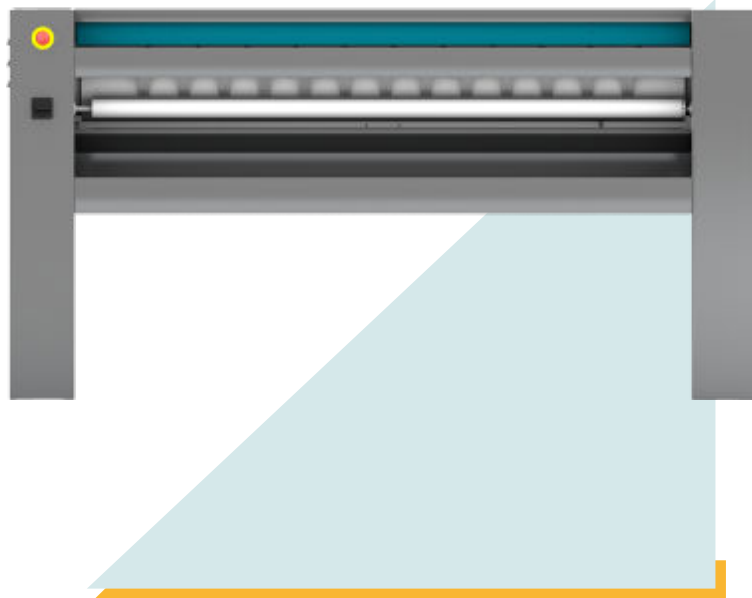

OPTIONS


- 440 V III 50-60 Hz No N
- 230 V III 50-60 Hz
- Maritime wooden packing for C-160/20

GENERAL DETAILS	UNIT.	C-160/20 P
Theoretical production*	Kg/h	16
	lb/h	35
Evaporation power	l/h	7,2
	USgallon/h	1,9
Roll Ø	mm	200
	inch	7,87
Working width	mm	1.600
	inch	63
Height floor-feeding belts	mm	990
	inch	39
Working speed	mt/min	1,5 - 6
	ft/min	4,9 - 19,6
Electronic control	-	YES
No. Programs (BM Modes)	Nº	2
POWER		
Heating power	kW	12
Total electric power	kW	12,34
Roll motor	kW	0,28
Fan motor	kW	0,09
CONNECTIONS		
Tension 230V III + T	nº x mm²/A	4 x 10 / 40A
	nº x AWG/A	4 x 7 / 40A
Tension 400V III + N + T	nº x mm²/A	5 x 4 / 20A
	nº x AWG/A	5 x 11 / 20A
DIMENSIONS / PACKING DIMENSIONS		
Net / gross width	mm	2.128 / 2.340
	inch	83,8 / 92,1
Net / gross depth**	mm	444**(666) / 770
	inch	17,5 (26,2) / 30,3
Net / gross height	mm	1.110 / 1.400
	inch	43,7 / 55,1
Net / gross weight	Kg	203 / 240
	lb	448 / 529
Volume	m³	1,05 / 2,52
	ft³	37,12 / 89,08
OTHERS		
No fume outlet	Nº	1
Ø Extraction	mm	83
	inch	3,27
Airflow	m³/h	300
	cfm	177
Sound level	dB	55

* 45% moisture

** Rear fan disassembly



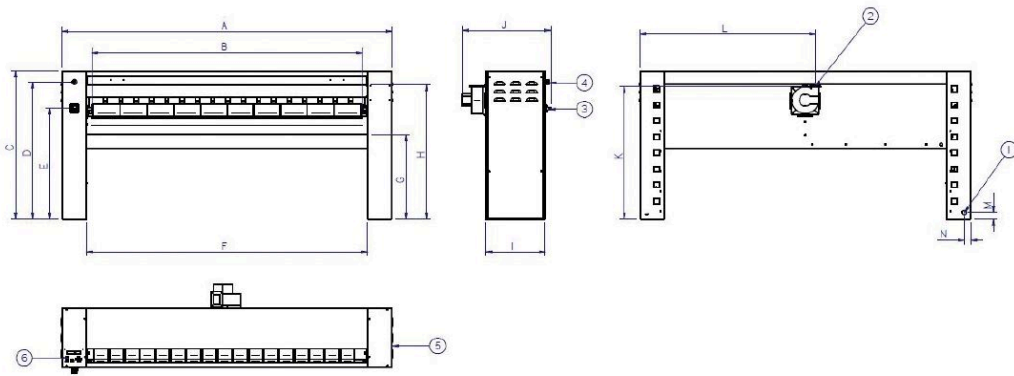

- 01. Electrical connection
- 02. Fume extraction
- 03. Main switch
- 04. Emergency stop
- 05. Crank
- 06. Electronic control

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-140/20 E P	1.878	1.470	1.110	1.028	830	1.510	631	1.006	444	666	995	1.016	50	50
C-160/20 E P	2.128	1.720	1.110	1.028	830	1.760	631	1.006	444	666	995	1.141	50	50
C-200/20 E P	2.478	2.070	1.110	1.028	830	2.110	631	1.006	444	666	995	1.316	50	50

