



Primer

C-160/20 P

Flatwork ironers Ø 200

ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.
Digital speed and temperature display.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable).
Fumes circulation circuit from the bottom reducing energy consumption.

ROBUSTNESS

Roll driving by speed inverter.
Nomex quality feeding and ironing belts: high temperatures resistant.
Panels in Skinplate and stainless steel.
Coiled felt for greater lifespan.

ERGONOMICS

Acoustic comfort : <65 dB.
Appropriate operating height: 990 mm.
Minimal encumbrance: space saving, suitable for most spaces.
Electronic control with Auto mode: easy to use, optimized ironing speed.

EASY MAINTENANCE

Easy access to all components on both sides of the machine.
A single electrical connection and mist outlet.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.
Front feeding and return.
Built-in **Cool Down** system.
Polished steel roll Ø 200 mm.
Roll length:
• 1400 mm (C-140/20 P)
• 1600 mm (C-160/20 P)
• 2000 mm (C-200/20 P)
Electric heating.
CE standard.



OPTIONS


- 440 V III 50-60 Hz No N
- 230 V III 50-60 Hz
- Maritime wooden packing for C-160/20

| GENERAL DETAILS | UNIT. | C-160/20 P | |
|--|--------------|---------------------|----------|
| Theoretical production Electric heating* | Kg/h | 16 | |
| | lb/h | 35 | |
| Roll Ø | mm | 200 | |
| | inch | 7,87 | |
| Working width | mm | 1.600 | |
| | inch | 63,0 | |
| Height floor-feeding belts | mm | 990 | |
| | inch | 39,0 | |
| Working speed | m/min | 1.5-6 | |
| | ft/min | 4.9-19.6 | |
| Electronic control | - | YES | |
| No. Programs | Nº | 2 | |
| Length folder | Nº | NO | |
| Large surface contact with linen | º | 270 | |
| POWER | | | |
| Electric heating power | Kw | 12 | |
| Total electric power | Kw | 12,34 | |
| Gas heating power | Kw | - | |
| Total gas power | Kw | - | |
| Steam heating power | Kg/h | - | |
| Roll motor power | Kw | 0,28 | |
| Fan motor power | Kw | 0,09 | |
| CONNECTIONS | | E | G |
| Tension 230V - I + N + T | Nº x mm² / A | N/A | N/A |
| | nº x AWG/A | N/A | N/A |
| Tension 230V - III + T | Nº x mm² / A | 4 x 10 / 40A | N/A |
| | nº x AWG/A | 4 x 7 / 40A | N/A |
| Tension 400V - III + N + T | Nº x mm² / A | 5 x 4 / 20A | N/A |
| | nº x AWG/A | 5 x 11 / 20A | N/A |
| Ø Gas inlet | BSP | - | |
| Ø Steam inlet | BSP | - | |
| Ø Condensed (Steam models) | BSP | - | |
| OVERALL DIMENSIONS / PACKING DIMENSIONS | | | |
| Net width / Gross width | mm | 2.128 / 2.340 | |
| | inch | 83,8 / 92,1 | |
| Net depth / gross depth** | mm | 444** (666) / 770 | |
| | inch | 17.5* (26.2) / 30,3 | |
| Net height / gross height | mm | 1.110 / 1.400 | |
| | inch | 43,7 / 55,1 | |
| Net weight / gross weight | kg | 203 / 240 | |
| | lbs | 448 / 529 | |
| Net volume / Gross volume | m³ | 1,05 / 2,52 | |
| | ft³ | 37,12 / 89,08 | |
| OTHERS | | | |
| No. Fume outlet | Nº | 1 | |
| Ø Fume outlet | mm | 83 | |
| | inch | 3,27 | |
| Air Flow | m³/h | 300 | |
| | cfm | 177 | |
| Sound level | dB | 55 | |
| Evaporation power | l/h | 7,2 | |
| | USgallon/h | 1,9 | |
| Additional ELECTRIC POWER for folder option | - | - | |
| Additional ELECTRIC POWER with folder + rear exit option | - | - | |

* 45% moisture

** Rear fan disassembly



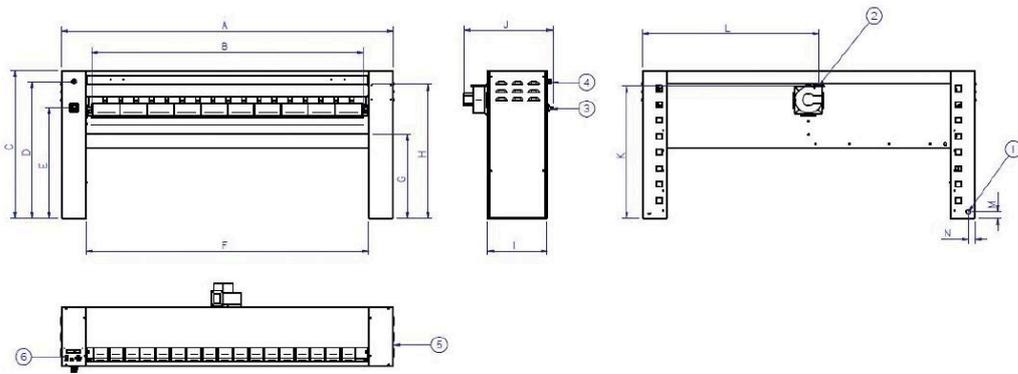

- 01. Electrical connection
- 02. Fume extraction
- 03. Main switch
- 04. Emergency stop
- 05. Crank
- 06. Electronic control

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|--------------|-------|-------|-------|-------|-----|-------|-----|-------|-----|-----|-----|-------|----|----|
| C-140/20 E P | 1.878 | 1.470 | 1.110 | 1.028 | 830 | 1.510 | 631 | 1.006 | 444 | 666 | 995 | 1.016 | 50 | 50 |
| C-160/20 E P | 2.128 | 1.720 | 1.110 | 1.028 | 830 | 1.760 | 631 | 1.006 | 444 | 666 | 995 | 1.141 | 50 | 50 |
| C-200/20 E P | 2.478 | 2.070 | 1.110 | 1.028 | 830 | 2.110 | 631 | 1.006 | 444 | 666 | 995 | 1.316 | 50 | 50 |

