



Primer

DDS-14 P

STANDARD stack dryers

P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

DUAL AIRFLOW: Optimized system of mixed airflow.
Big fluff filter.

VERSATILITY

Make to order: customisation.
OPL > Self-service - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
Biggest door diameters.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console.

OTHERS

Grey Skinplate outer casing, stainless steel look.
EFFICIENT DRUM: The new drum with stamped holes.
COOL DOWN: anti-wrinkle at the end of the cycle.
Heating options: electric and gas, except DDS-22 T2 gas only.
CE approved.




OPTIONS

- Double doorglass (order 1 unit per column)
- Screen in P programmer (2 units)
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm)
- NG gas option (Natural) for DDS
- Stainless steel front and side panels DDS-14
- 400V III 50Hz 11/14/18kg
- 400V III 60Hz 11/14/18/22kg
- Front panel in stainless steel DDS-11/14/18
- 230V III 60Hz 11/14/18kg G
- 230V III 60Hz 11/14/18kg E
- 440V/480V III 60Hz 11/14/18/22kg (maritime)
- Maritime wooden packing DDS-14
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DDS-14 P	
Capacity 1/18		Kg	15	
		lb	33,1	
Capacity 1/20		Kg	13,5	
		lb	29,8	
Ø Drum		mm	750	
		inch	29,53	
Drum length		mm	746	
		inch	24,02	
Drum volume		l	270	
		cu ft	9,53	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	547 / 1.522	
		inch	21,54 / 59,92	
Height from floor to bottom of door		mm	189 / 1.164	
		inch	7,32 / 45,83	
ELECTRIC HEATING				
Evaporation capacity		L/h	17,2	
		US gallon/h	4,54	
Hourly output		Kg/h	34,4	
		lb/h	75,8	
Installed heating power		kW	12 x2	
Installed electrical power		kW	25,34	
Drum motor power		kW	0,37 x2	
GAS HEATING				
Evaporation capacity (gas model)		L/h	16,9	
		US gallon/h	4,465	
Hourly output (gas model)		Kg/h	33,8	
		lb/h	74,5	
Installed gas heating power		kcal/h	10327 x2	
		Btu/h	40945,7 x2	
Installed gas heating power		kW	12 x2	
Installed electrical power		kW	1,34	
Instant propane gas consumption (G31)		Kg/h	1,03 x2	
		lb/h	2,27 x2	
Instant natural gas consumption (G20)		m ³ /h	1,27 x2	
		cfm	0,75 x2	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,25 x2	
Nominal air flow rate		m ³ /h	500 x2	
		cfm	294,28 x2	
Ø Fume exhaust		mm	200 x2	
Ø Fume exhaust		inch	7,78 x2	
HEAT EMISSION				
Maximum total heat emission		kW	2,4	
		Btu/h	8193,9	
Max. front heat emission		kW	1,68	
		Btu/h	5735,8	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm ² / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30,91 / 34,06	



Net / gross depth	mm	1.106 / 1.189
	inch	43,54 / 46,81
Net height / gross height without heating	mm	1.980 / 2.126
	inch	77,95 / 83,70
Net / gross weight	Kg	275 / 293
	lb	606,27 / 645,95
OTHERS		
Sound level	dB	64

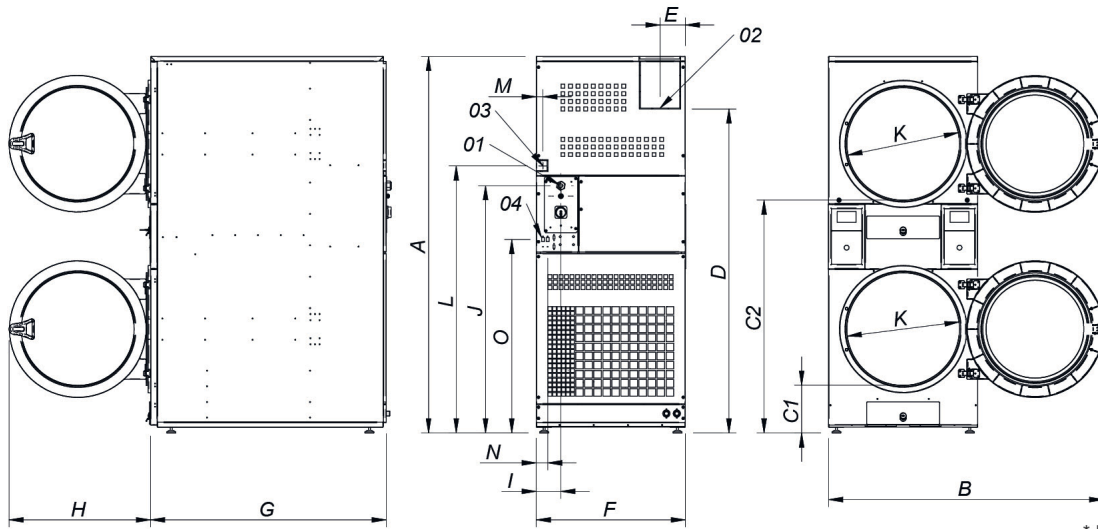

- 01. Electric connection
- 02. Fumes outlet $\varnothing 200$
- 03. Gas inlet 1/2
- 04. Ethernet connection (only available control T2 models)

* Measurement with legs mounted (30mm)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
DDS-11	1980*	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1018
DDS-14	1980*	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1018
DDS-18	1980*	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1018

