



Primer

SPE600-2-3300

SPE Flatwork Ironers

FEATURES

- In a space of just 18 m², it dries and irons, folds and stacks linen.
- Folding types: longitudinal and crosswise.
- Can be operated by a single operator.
- Maximum output up to 290 kg/h.*
- Adjustable ironing speed up to 18 m/min.*
- Maximum temperature: 165°C.
- Automatic ironing speed control.
- Automatic cooling of the ironing roller.
- Available in one or two work lanes.
- Intuitive and programmable 7" touchscreen. Optional mobile arm.
- Fume extraction system with automatic fan cleaning.
- Stackers can be added (optional).
- Customisable with different accessories.
- Featured options:

SALIDA LATERAL / Side exit




1 Apilador lat. compacto por palas
Side standard stacker by blades



2 Apilador lat. Roll-Off (por arrastre)
Side stacker Roll-Off

SALIDA POSTERIOR / Rear exit



3 Recogedor post. + bypass (2/4 vías)
Rear collector + bypass (2/4 lanes)






SMARTY
Plegadora prend. pequeñas
Small garment folder

*Maximum production and speed, variable depending on model, configuration and working conditions.




OPTIONS

- Four lanes for lengthfolding
- Motorized high table for side exit (no stacker) H=805mm
- Low table for side exit (no stacker) H=480mm
- Rotating control panel
- Compact side stacker by blades
- Roll-off side stacker
- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (needs option of vacuum feeding belts)
- By pass for rear exit
- Rear exit table SPE (needs bypass option)
- 2 lanes rear collector small garments (it needs bypass option)
- 4 lanes rear collector small garments (it needs bypass option)
- Double air pressure in length folds for thicker linen
- Linen reject system (dirty or torn)
- Remote service
- Different voltage from 400V 3~ +N 50 Hz
- Maritime packaging SPE
- Maritime packing for compact side stacker by blades
- Maritime packing for Roll-off side stacker
- Maritime packing for small pieces collector 2 lanes
- Maritime packing for small pieces collector 4 lanes

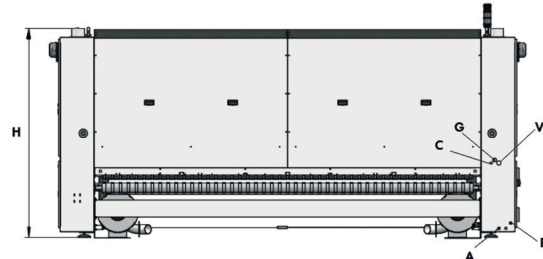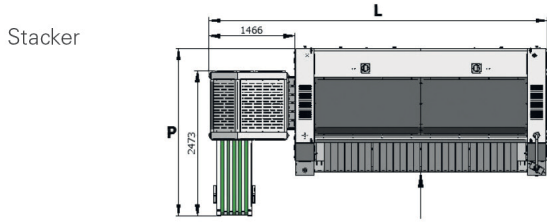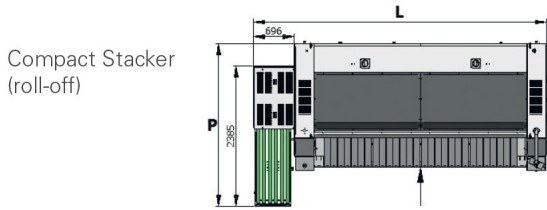

- A. Compressed air inlet
- C. Condensation discharge (steam models)
- E. Electrical connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

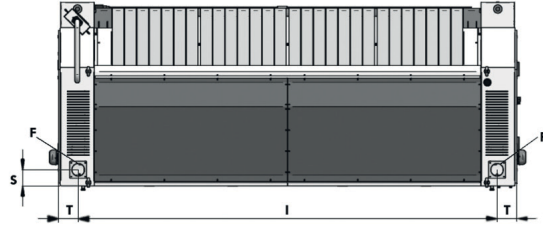

Compact Stacker

| | L | P |
|-------------|-------|-------|
| SPE600-2600 | 4.425 | 2.385 |
| SPE600-3300 | 5.125 | 2.385 |

Stacker

| | L | P |
|-------------|-------|-------|
| SPE600-2600 | 5.105 | 2.476 |
| SPE600-3300 | 5.805 | 2.476 |

| | H | I | T | S | A | C | E | F | G | V | W |
|-------------|-------|-------|-------|-----|------|------|-----|-------|----|----|-----|
| SPE600-2600 | 1.867 | 1.196 | 1.208 | 478 | Ø 12 | 1/2" | 5G4 | Ø 120 | 1" | 1" | 765 |
| SPE600-3300 | 1.867 | 1.896 | 1.208 | 478 | Ø 12 | 1/2" | 5G4 | Ø 120 | 1" | 1" | 765 |

