



# Primer

## PN-120/18 Nomex Wall ironers Ø180

### ELECTRONIC CONTROL

Selection between 4 temperatures.  
Preset ironing speeds, not adjustable.  
No display.

### EFFICIENCY

Acoustic comfort : 50-60 dB max.  
Minimum space requirement: space saving, suitable for small spaces.  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

### ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on EXCELLENCE).  
Panels in grey Skinplate and stainless steel.  
Wooden feeding board.  
Industrial components, more durable.

### FEATURES


Large roll contact area with the linen.  
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.  
Two available models:  
• **Standard**: roll with cotton polyester coating.  
• **Nomex**: roll with Nomex coating.

### EASY MAINTENANCE

Easy installation : requires only an electrical connection.  
Easy access on both sides for maintenance.  
Quick and easy dismantling of bearings.

### OTHERS

Front feeding and return.  
Roll Ø 180mm.  
Working widths: 1.000 and 1.200 mm.  
Electric heating.  
CE certification.

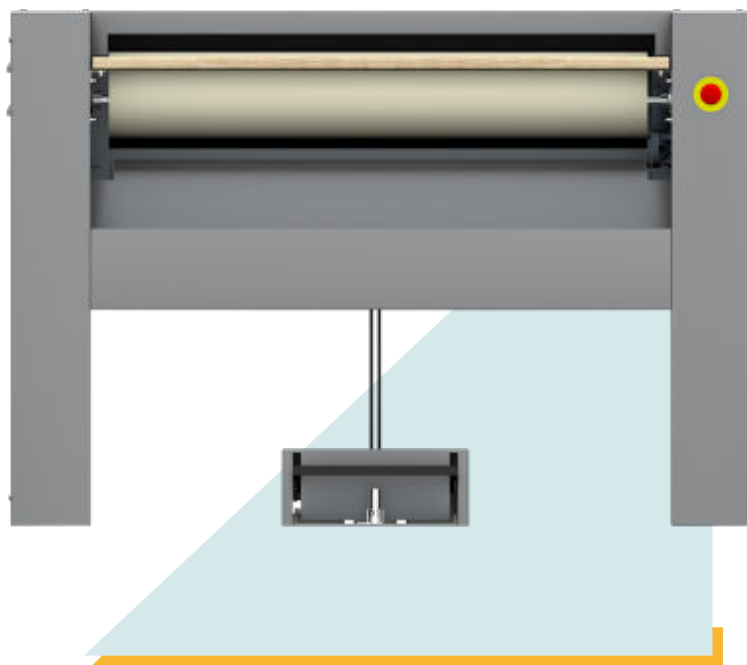


### OPTIONS

- Pedal control instead of photocell (except mod. EXCELLENCE)
- 230 V I N 50 Hz (except mod. 200 EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS		UNIT.	PN-120/18 Nomex
Theoretical production: 20-25 humidity		Kg/h	20
		Lb/h	44,09
Roll Ø		mm	180
		inch	7,09
Working width		mm	1.200
		inch	47,24
Working speed		m/min	2.02
		ft/mn	6,62
Electronic control		-	YES
Chest motion		-	Manual
POWER			
Heating power		Kw	4
Roll motor power		Kw	0,03
Total electric power		Kw	4,03
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	3 x 4 / 20A
		nº x AWG/A	3 x 11 / 20A
Tension 230 V III + T		nº x mm²/A	-
		nº x AWG/A	-
Tension 400 V III + N + T		nº x mm²/A	-
		nº x AWG/A	-
DIMENSIONS			
Net / gross width		mm	1.570 / 1.690
		inch	61,81 / 66,54
Net / gross depth		mm	438 / 540
		inch	17,24 / 21,26
Net / gross height		mm	952 / 1.130
		inch	37,48 / 44,49
Net / gross weight gross		Kg	90 / 110
		Lb	198,42 / 242,51
Net / gross volume gross		m³	0,65 / 1,03
		ft³	22,95 / 36,37
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55



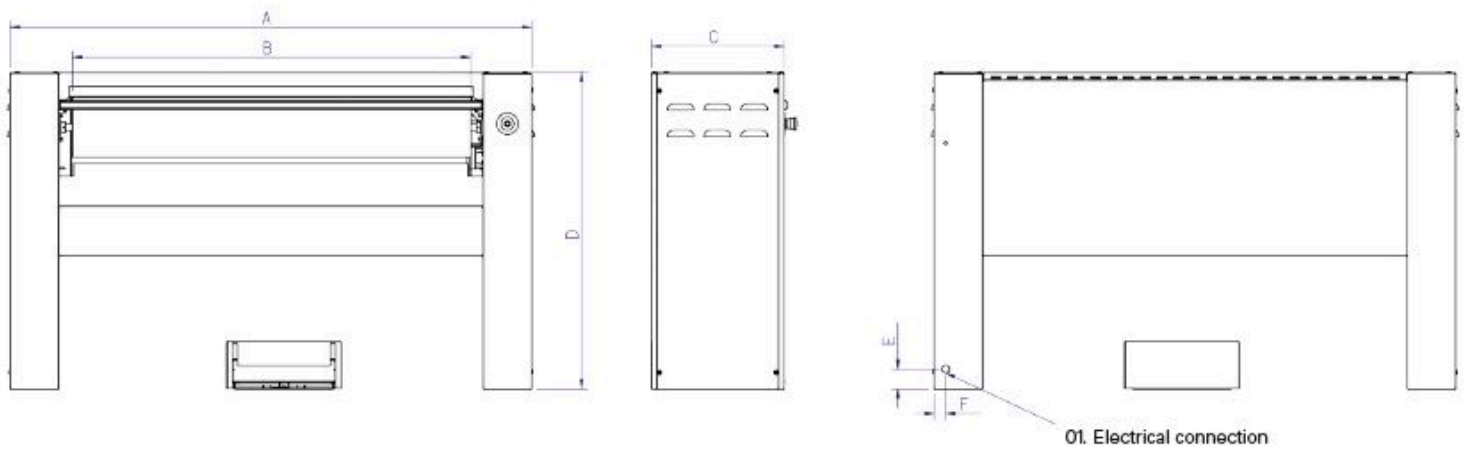

	A	B	C	D	E	F
PN-100/18	1694	1447	689	1354	68	785
PN-120/18	1694	1447	689	1354	68	785