



# Primer

## PN-120/18 Nomex Wall ironers Ø180

### ELECTRONIC CONTROL

Selection between 4 temperatures.  
Preset ironing speeds, not adjustable.  
No display.

### EFFICIENCY

Acoustic comfort : 50-60 dB max.  
Minimum space requirement: space saving, suitable for small spaces.  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

### ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on EXCELLENCE).  
Panels in grey Skinplate and stainless steel.  
Wooden feeding board.  
Industrial components, more durable.

### FEATURES

Large roll contact area with the linen.  
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.  
Two available models:  
• **Standard**: roll with cotton polyester coating.  
• **Nomex**: roll with Nomex coating.

### EASY MAINTENANCE

Easy installation : requires only an electrical connection.  
Easy access on both sides for maintenance.  
Quick and easy dismantling of bearings.

### OTHERS

Front feeding and return.  
Roll Ø 180mm.  
Working widths: 1.000 and 1.200 mm.  
Electric heating.  
CE certification.




### OPTIONS

- Speed control (except EXCELLENCE)
- Pedal control instead of photocell (except mod. EXCELLENCE)
- 230V 1 + N 50Hz (Except NPN EXCELLENCE)
- 400V 3+N+T 60Hz
- 440V 3 60Hz No N (marine)

GENERAL DETAILS	UNIT.	PN-120/18 Nomex
Theoretical production 20-25% humidity	Kg/h	20
	Lb/H	44,09
Roll Ø	mm	180
	Inch	7,09
Working width	mm	1.200
	Inch	47,24
Working speed	m/min	2.02
	ft/mn	6,62
SC speed control (option)	m/min	YES
	ft/mn	Manual
Nomex quality coating	-	
Electronic control	-	
Chest motion	-	
POWER		
Heating power	Kw	4
Roll motor power	Kw	0,03
Fan motor power	Kw	0
Total electric power	Kw	4,03
CONNEXIONS		
Tension 230 V I + N + T	nº x mm²/A	3 x 4 / 20A
	nº x AWG/A	3 x 11 / 20A
Tension 230 V III + T	nº x mm²/A	-
	nº x AWG/A	-
Tension 400 V III + N + T	nº x mm²/A	-
	nº x AWG/A	-
DIMENSIONS		
Net / gross width	mm	1.570 / 1.690
	inch	62 / 67
Net / gross depth	mm	438 / 540
	inch	17,24 / 21,26
Net / gross height	mm	952 / 1.130
	inch	37,48 / 44,49
Net / gross weight	Kg	90 / 110
	Lb	198,42 / 242,51
Net / gross volume	m³	0,65 / 1,03
	ft³	22,95 / 36,37
OTHERS		
No. Fume outlet	Nº	-
Ø Fume outlet	mm	-
	inch	-
Air flow	m³/h	-
	cfm	-
Noise Level	dB	55



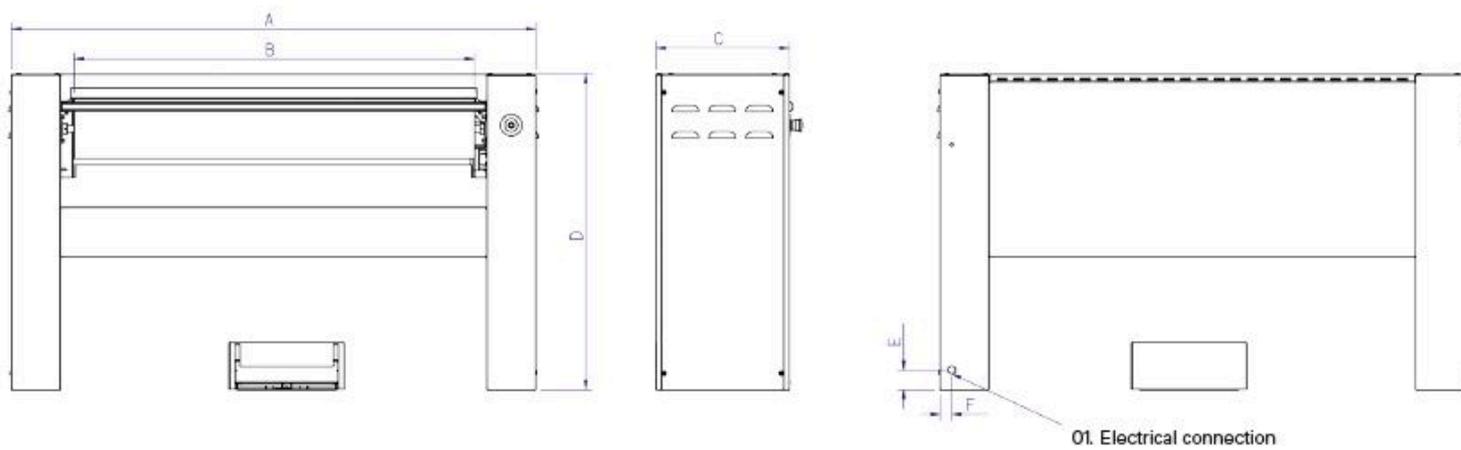

	A	B	C	D	E	F
PN-100/18	1694	1447	689	1354	68	785
PN-120/18	1694	1447	689	1354	68	785