



Primer

S600-2600

S Flatwork Ironers

FEATURES

Roll sizes: 2.600 and 3.300mm wide and 600, 800 and 1.000mm de diameter.

Panels in painted steel.

Frequency control.

Feeding and ironing belts are NOMEX.

Touch-screen control: programs can be created with speed control (between 3 and 18 mts/min) and temperature.

Automatic stop after cooling down (at 80°C).

Big output capacity, depending on the residual moisture of the linen, up to 290 kg/hour straight from the high spin washer extrator.

Electric, gas or steam heating.

Gas models with radiant burner (increase of 25% more production, available in diametre 800 models and standard in diametre 1.000 models).

Powerful exhaust system.




OPTIONS

- Vacuum table to help the linen feeding
- Automatic 1 lane clamp feeder without vacuum feeding belts
- Rear exit
- Motorized rear exit - height 860 mm. (rear exit included)
- Small pieces back collector: 2 lanes for S
- Small pieces back collector: 4 lanes for S
- Different voltage from 400V 3~ +N 50 Hz
- Maritime packing for S

| GENERAL DATA | UNIT. | S600-2600 |
|---|--------|---------------|
| Theoretical production* elec/steam/atm. Gas heating | Kg/h | 125 |
| Theoretical production* radiant gas burner | Kg/h | - |
| Ø Roll | mm | 600 |
| Working width | mm | 2.600 |
| Height floor-feeding | mm | 1.050 |
| Working speed | mt/min | 3-10 |
| Control type | - | Digital |
| Nº of programs | Nº | 20 |
| POWER | | |
| Electric heating | kW | 54 |
| Max. electric power electric heating | kW | 55,9 |
| Gas heating (natural / LPG) | kW | 63,30 / 67,40 |
| Max. electric power gas heating | kW | 1,9 |
| Steam heating | kW | 55 |
| Max. electric power steam heating | kW | 1,9 |
| CONNECTIONS | | |
| Ø Gas inlet | BSP | 1" |
| Ø Steam inlet (12 bar max.) | BSP | 1" |
| Ø Condensed (steam models) | BSP | 1/2" |
| Ø Air inlet | BSP | 12 |
| DIMENSIONS / PACKAGING DIMENSIONS | | |
| Net width / gross width | mm | 3.670 / 3.830 |
| Net depth / gross depth | mm | 1.440 / 1.620 |
| Net height / gross height | mm | 2.030 / 1.960 |
| Net weight / gross weight | Kg | 1.800 / 2.050 |
| Volume | m3 | 10,73 / 12,16 |
| OTHERS | | |
| No. Fume outlet | Nº | 2 |
| Ø Fume outlet | mm | 120 |
| Extraction rate | m3/h | 2 x 1.000 |
| Compressed air consumption (6,5 bar) | mm | 5.000 |
| Sound Level | dB | 70 |

* 50% residual moisture, 140gr/m² of cotton, 100% roll utilization

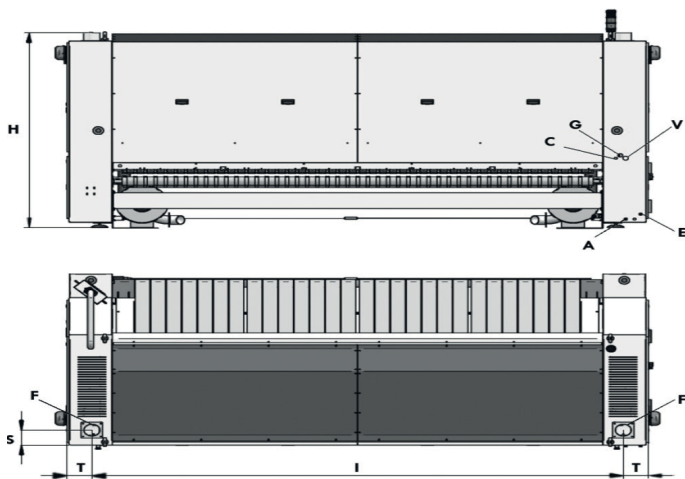

- A. Compressed air inlet
- C. Condensed discharge (steam mod.)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

| | H | I | T | S | A | C | E | F | G | V |
|-----------|-------|-------|-----|-----|------|------|---------|-------|----|----|
| S600-2600 | 1.800 | 3.242 | 186 | 152 | Ø 12 | 1/2" | 5 x 2,5 | Ø 120 | 1" | 1" |
| S600-3300 | 1.800 | 3.942 | 186 | 152 | Ø 12 | 1/2" | 5 x 2,5 | Ø 120 | 1" | 1" |

