



FEATURES

Steam generators GE-24

- Electric and automatic steam boiler SB-24 to supply steam to models without boiler. Available from 12 to 22 kW.
- Water feed can be connected directly to the water mains or to a condensate tank. Pressure between 1 and 7 bar.
 - Capacity 24,9 litres.
 - Voltage: 230/400V III 50-60Hz.

Small steam generators with iron FD-2

- Electric steam boiler with steam iron.
- Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kW.
 - Manually operated water feeding (drinking water required for its functioning).
 - Automatic pressure control by thermostat with fixed setting.
 - Mobile trolley as option.
 - Voltage: 230V I +N 50-60Hz.

Small steam generators with iron FD-5

- Stainless steel electric steam boiler with electric steam iron.
- Boiler capacity 5 liters, heater 1,45 kW.
 - Water level indicator with warning light for empty boiler.
 - Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
 - Manual water feed.
 - Mobile trolley as option.
 - Voltage: 230V I +N 50Hz.

Table with Hoover MD/5

- Folding ironing table with electrically heated board and built in suction unit.
- Without steam iron, without built-in boiler.
 - Board dimensions: 1.380 x 380 x 930 mm.





OPTIONS

- Stainless steel condensate recovery tank 45L
- Stainless steel condensate recovery tank 83L

| GENERAL DETAILS | UNIT. | GE-24 |
|------------------------------|-------|--------------------|
| Boiler capacity | L | 24,9 |
| Steam pressure | Bar | 0,3 - 7 |
| Working temperature | °C | +5 ÷ +80 |
| Working humidity | - | 90% max |
| Boiler Heater | kW | - |
| Iron Heater | kW | - |
| Resistance table | W | - |
| Suction motor | W | - |
| POWER | | |
| Boiler heaters | kW | 12- 22 |
| Steam production | Kg/h | 16 - 29,7 |
| Pump motor power | HP | 0,5 |
| CONNECTIONS | | |
| Water feeding inlet | in | 1/2" |
| Boiler exhaust | in | 1/2" |
| Steam inlet | in | 1/2" |
| Condensate return with valve | in | 1/2" |
| Autonomy | - | - |
| Operating pressure | BAR | - |
| DIMENSIONS | | |
| Dimensions | mm | 580 x 660 x 780 |
| Net weight | Kg | 85 |
| Gross weight | Kg | 111 |
| Packing dimensions | mm | 880 x 730 x 1.050 |
| Working dimensions | - | - |
| Voltage | V/Hz | 230/400V III 50-60 |
| Sound level | dB | <70 |



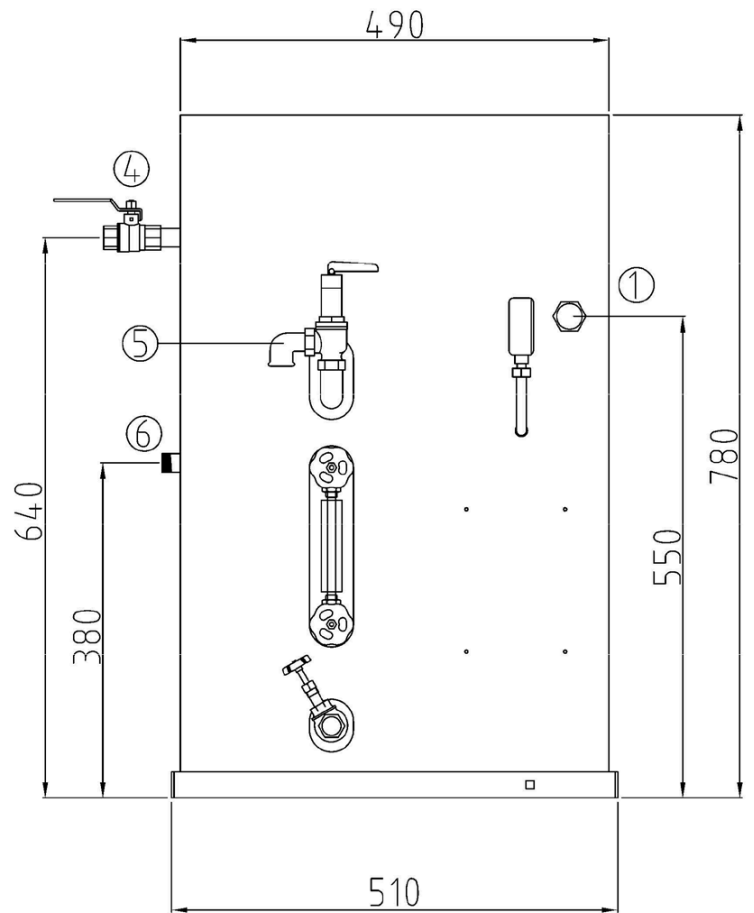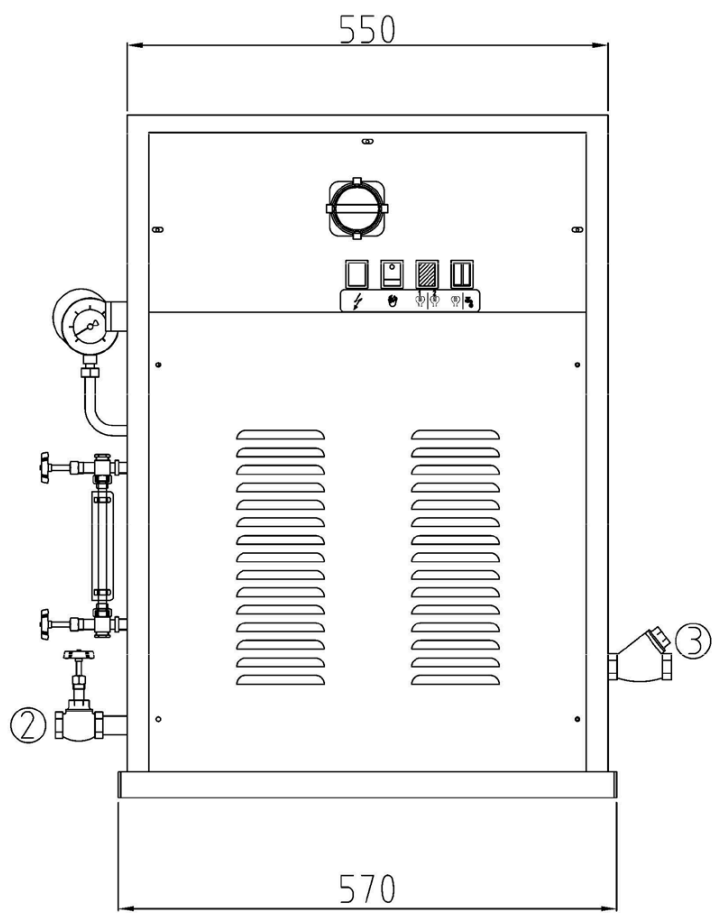

1. PG21 power supply inlet.
2. Boiler exhaust.
3. Water feeding inlet.
4. Steam inlet.
5. Safety valve.
6. Condensate return with valve.