



### ELECTRONIC CONTROL

#### **PN-100/25, PN-120/25, PN-140/25, PN-200/25**

- Digital screen: precise control of temperature.
- Preset ironing speeds, not adjustable.

#### **PN-140/25, PN-200/25 EXCELLENCE**

- Simple and user friendly with an **automatic mode**: automatic management of ironing speed according to the selected temperature.
- Digital speed and temperature display.

### EFFICIENCY

Acoustic comfort: 65 dB max.

Minimum space requirement: space saving, suitable for small spaces.

Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.

### ROBUSTNESS

**Nomex quality coating**: resistant to high temperatures (option, standard on EXCELLENCE).

Panels in grey Skinplate and stainless steel.

Wooden feeding board.

Industrial components, more durable.

### OUTSTANDING FEATURES

Large roll contact area with the linen.

Roll lifting control by pedal or automatic roll lifting control by foot cell detection.

Two available models:

- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.

#### **Modelos EXCELLENCE:**

- Large roll contact area with the linen.
- Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
- Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
- Adjustable speed and temperature.

### EASY MAINTENANCE

Easy installation : requires only an electrical connection.

Easy access on both sides for maintenance.

Quick and easy dismantling of bearings.

### OTHERS

Front feeding and return.

Roll Ø 250 mm.

Working widths: 1.000, 1.200, 1.400 and 2.000 mm.

Electric heating.

CE certification.




### OPTIONS

- Pedal control instead of photocell (except mod. EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS		UNIT.	PN-200/25 Nomex
Theoretical production: 20-25 humidity		Kg/h	35
		Lb/h	77,16
Roll Ø		mm	250
		inch	9,84
Working width		mm	2.000
		inch	78,74
Working speed		m/min	4.2
		ft/mn	13,77
Electronic control		-	YES
Chest motion		-	Automático
POWER			
Heating power		Kw	12
Roll motor power		Kw	0,18
Fan motor power		Kw	0
Total electric power		Kw	12,18
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	-
		nº x AWG/A	-
Tension 230 V III + T		nº x mm²/A	4 x 6 / 32A
		nº x AWG/A	4 x 9 / 32A
Tension 400 V III + N + T		nº x mm²/A	5 x 4 / 20A
		nº x AWG/A	5 x 11 / 20A
DIMENSIONS			
Net / gross width		mm	2.462 / 2.490
		inch	97 / 98
Net / gross depth		mm	484 / 540
		inch	19,06 / 21,26
Net / gross height		mm	985 / 1.130
		inch	38,78 / 44,49
Net / gross weight gross		Kg	164 / 184
		Lb	361,56 / 405,65
Net / gross volume gross		m³	1,17 / 1,51
		ft³	41,32 / 53,33
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55



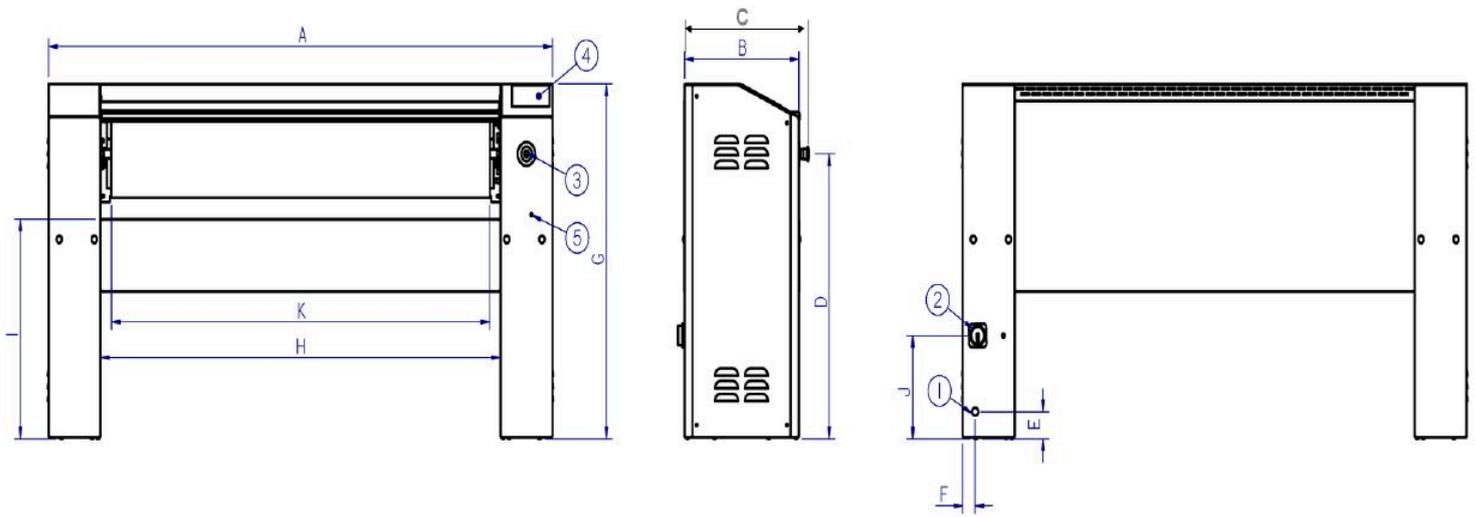

- 01. Electrical connection
- 02. Main switch
- 03. Emergency stop
- 04. Control panel
- 05. access to inverter maintenance

	A	B	C	D	E	F	G	H	I	J	K
PN-100/25	1.462	423	484	791	75	45	985	1.079	610	287	998
PN-120/25	1.662	423	484	791	75	45	985	1.279	610	287	1.198
PN-140/25	1.862	423	484	791	75	45	985	1.479	610	287	1.398
PN-200/25	2.462	423	484	791	75	45	985	2.079	610	287	1.998