Primer

MAN
Mannequins and toppers

FEATURES

MAN / MAN-C
Utility form-finisher ideal fot the finishing of coats, jackets, dresses, etc.
• Automated working cycles.
• Electronic card.
• Possibility to set nine different cycles, and regulation of streaming and drying time.
• Adjustable shoulder width and height of the dummy.
• Rotation 360º of dummy support (frame) and controls.

MAN (without boiler)
• Without steam boiler, to be connected to a central steam supply.
• It needs a steam inlet and outlet.
• Can be installed with steam generator SB-24 - 12 kW.
• Voltage: 230V 3 / 400V 3 50Hz.

MAN-C (with boiler)
• Complete with built-in steam boiler 18 lt.
• Automatic water feeding.
• Automatic pressure control (4,5 bar).
• Voltage: 230V 3 / 400V 3 50Hz.



TOPPER-A / TOPPER C
Finishing topper for trousers, with air-operated waistband and leg stretching devices.
• Side waistband stretching device.
• Height adjustable leg stretching carriage and stainless steel leg clamps.
• Built-in three-phase fan; air heating device.
• Electronic card for the setting of nine ironing cycles in total.
• Ironing cycle controlling: streaming time, setam/air time, drying time. Three pressure regulators (for leg clamps, waistband stretcher and leg stretching carriage).
• Switch for the exclusion of the leg stretching carriage.
• Manual size indicator.
• Mechanical airflow regulator.

TOPPER (without boiler)
• Without boiler.
• Needs connection to external steam source.
• Can be connected to SB-24 steam generator.

TOPPER-C (with boiler)
• With built-in boiler.
• Electric operation.

GENERAL DETAILS	UNIT.	MAN
Boiler	-	NO
Boiler capacity	L	-
Group of iron	-	-
Steam gun	-	-
POWER		
Pump motor	HP	-
Boiler heater	kW	-
Fan motor	kW	1
CONNECTIONS		
Ø Water inlet	BSP	-
Ø Boiler exhaust (mod. with boiler)	BSP	-
Ø Steam inlet	BSP	3/8"
Ø Condensate outlet	BSP	3/8"
Steam pressure	bar	4,5
Steam consumption	Kg/h	10-15
Ø Air inlet	BSP	-
Ø Air outlet	mm	-
Air pressure	bar	-
Air Consumption	Nl/min	-
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	1.200 / 1.390
Net depth / Gross depth	mm	580 / 640
Net height / Gross height	mm	1.620 / 1.910
Net weight / Gross weight	kg	88 / 109
Volume	m³	1,13 / 1,70
OTHERS		
Voltage	V	230/400V 3~ 50-60
Sound level	dB	70

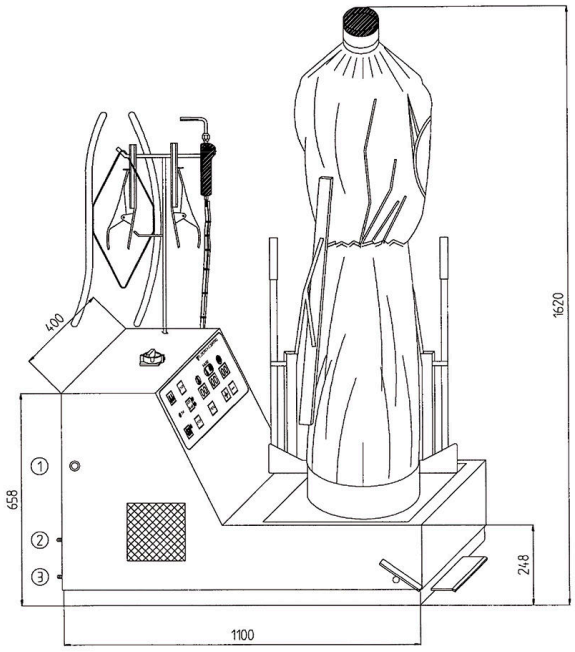

1. Electrical connection
2. Condensate
3. Steam inlet