



# Primer

## LCA-100 T2

## Pullman barriers Pullman 100kg



### T2 CONTROL

7" touch screen easy to use and fully programmable, double display  
 Connection USB. Free software online for programming, telemetry, data analysis., etc.  
 Videos on display (instructions, etc.)  
 37 languages.  
 8 dosing signals as standard.



### OUTSTANDING FEATURES

Automatic positioning of drum with motor brake and UPS device (in case of power failure).  
 3 water inlets, double drain.  
 WET CLEANING, telemetry standard.  
 G-FACTOR 325.  
 Heating: electric and steam.



### EFFICIENCY

Intelligent consumption.  
 Optimal loading: manual indication of weight.  
 Water Recovery tanks ready: **SAVETANK, SAVETANK XL**  
 Low water consumption.  
 High G-FACTOR: reduced residual moisture > reduced drying time.



### CONNECTIVITY

**IoT - PRIMERLINK standard.**  
 Remote technical service.  
 Laundry management.



### ERGONOMICS

Huge door opening making loading/unloading easier.  
 Easy friendly drum opening by push button.  
 Loading height: door base 960 mm.



### EASY MAINTENANCE

Electric components on the left side, mechanical components on the right side and connections on the top (protected from water and detergents).  
 Technical menu: statistics, alarms, autotest, data recovery for technicians and maintenance.



### OTHERS

2 opposed doors. Pass-through barrier washer.  
 Ready to be connected to dosing pumps.  
 Grey Skinplate outer casing.  
 Drum and vat in stainless steel AISI 304.  
 Frequency inverter to control imbalance.  
 CE approved product.



### OPTIONS


- License IoT - PrimerLink
- Screen and panels protector
- 6 extra dosing signals card for automatic liquid dosing
- Printer
- Double heating Electric + Steam
- Weighing system on the legs for LCA-100. Includes kit with 6 extra dosage signals
- Trirration valve
- End of cycle light alarm
- 4 compartment detergent box
- Stainless steel outer casing AISI 304
- Ready for SAVETANK XL conn. 1" for barriers for LCA-100
- Stainless steel frame
- Maritime wooden packing
- 230 V III 50/60 Hz
- 440 V III 50/60 Hz (maritime)

DRUM	UNIT.	LCA-100 T2	
Load capacity 1:9	Kg	100	
	lb	220,5	
Load capacity 1:10	Kg	90	
	lb	198,4	
Volume	l	900	
	ft <sup>3</sup>	31,78	
Diameter	mm	1.050	
	inch	41,3	
Depth	mm	1.032	
	inch	40,6	
Drum compartments	Nº	2	
GENERAL DETAILS			
Washing speed	rpm	45	
Spining speed	rpm	750	
G-Factor	-	325	
T2 Control	-	7"	
Double screen	-	STD	
Motor break	-	STD	
Double drainage	-	STD	
DOOR			
Drum opening dimensions	mm	900 x 500	
	inch	35,4 x 19,6	
Vat opening dimensions	mm	960 x 700	
	inch	37,8 x 27,55	
Height door bottom	mm	960	
	inch	37,8	
POWER			
Motor	kW	15	
Electric heating (elec. mod)	kW	60	
Total electric power (elec. mod)	kW	75	
Total electric power (steam mod)	kW	15	
CONNECTIONS		E/DUAL	S
Tension 230V I + N + T 50/60Hz	Nº x mm <sup>2</sup> /A	-	-
Tension 230V III + T 50/60Hz	Nº x mm <sup>2</sup> /A	-	4 x 10 / 40A
Tension 400V III + N + T 50/60Hz	Nº x mm <sup>2</sup> /A	5 x 25 / 120A	5 x 6 / 25A
Water inlets number	-	3	
Water inlet	inch	1"	
Water pressure	bar	3 - 5	
	psi	43 - 72	
Steam inlet (steam mod)	inch	3/4"	
Steam pressure	bar	4-8	
	psi	58-116	
Drain number	-	2	
Drain evacuation capacity	l/min	2x160	
	cfm	2x5,65	
Drain	inch	3"	
OVERALL DIMENSIONS			
Net / Gross width	mm	1.742 (1.894) / 1.890	
	inch	68,6 (74,6) / 74,4	
Net / Gross depth	mm	1.468 / 1.540	
	inch	57,8 / 60,6	
Net / Gross height	mm	1.982 / 2.150	
	inch	78 / 84,6	
Net / Gross weight	kg	1.900 / 1.958	
	lb	4.189 / 4.316,7	



Volume	m <sup>3</sup>	6,26
	ft <sup>3</sup>	221

\* Program No 2, 100 % load

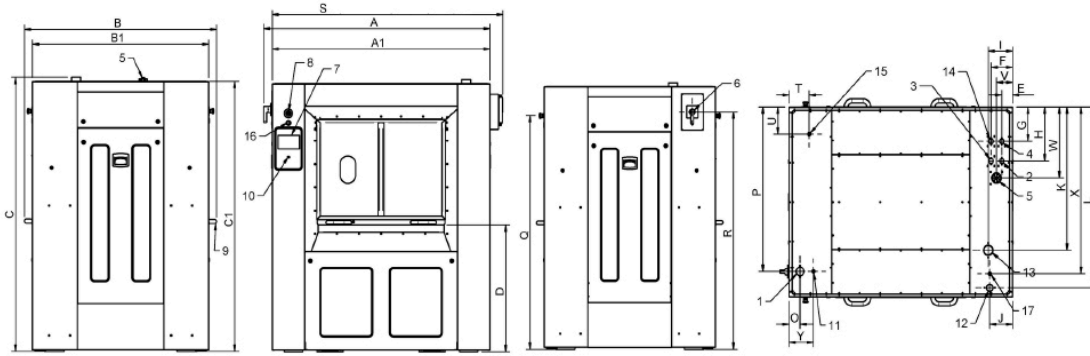

01. Electrical connexion
02. Cold water inlet
03. Soft water inlet
04. Hot water inlet
05. Liquid products inlet
06. Main switch
07. Control panel
08. Emergency stop
09. Door opening
10. USB port
11. Dosing pumps connexion
12. Steam inlet
13. Exhaust
14. Cold water for detergents box
15. Compressed air connexion

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	O	P	Q	R	S	T	U	V	W	X	Y
LCA-100	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	83	1163	1737	1765	1777	150	192	122	502	1179	183