



Primer

C-260/65 T2

Flatwork ironers Ø 650 EXCELLENCE

T2 CONTROL

PRIMERLINK - IoT connectivity as standard.

7" touch screen fully programmable.

37 available languages, 5 preset programs.

USB connection. Free software online for programming, telemetry, data analysis.

Reversing roll as standard.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.


Automatic shutdown at 80°C (adjustable parameter).

Fumes circulation circuit from the bottom reducing energy consumption.

Model with gas radiant burners: +25% productive.

SMART IRON: automatic regulation of ironing speed according to residual moisture (standard).

High production system: ironing speed up to 15 m/min (standard).

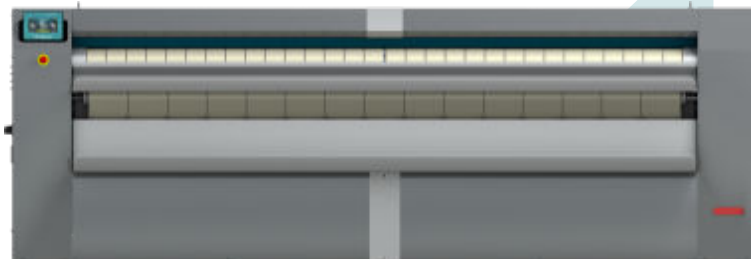

ROBUSTNESS

Roll driving by speed inverter: smooth operation preventing the wear of belts and mechanical elements.

Panels in skinplate and stainless steel.

Nomex quality ironing belts: high temperatures resistant.

Nickel plate roll as option: Nickel-plated cylinder, anticorrosive, more durable.

ERGONOMICS

Acoustic comfort : <65 dB.

Appropriate operating height: 1120 mm feeding belts.

Compact dimensions.

EASY MAINTENANCE

Easy access to all components on both sides of the machine.

Complete technical menu: statistics, autotest, data recovery for technician and maintenance.

Remote communication: faster intervention.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.

Front feeding and return.

Built-in cool down system.

Polished steel roll Ø 650 mm.

Roll length:

- 2000 mm (C-200/65)

- 2600mm (C-260/65)

- 3300mm (C-330/65)

Electric, radiant gas or steam heating.

CE standard.

OPTIONS

- Nickel Plated roll C-260/65
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder C-260/65
- Rear exit for 650/260
- Maritime wooden packing for C-260/65
- Cross folder Ø 500-650 2600
- Antistatic belts for C-260/65 ironers without folder
- 230 V III 65-60 Hz electric C-260/65 E
- Antistatic belts + bar for C-260/65 ironers with folder
- 230 V III 60 Hz gas C-260/65 G
- 440 V III 65-60 Hz electric C-260/65 E
- 120 V I 60 Hz + N Gas CC-260/65 (Gas US)


GENERAL DATA	UNIT.	C-260/65 T2	
Electric theoretical production*	Kg/h	115	
	Lb/h	254	
Radiant gas theoretical production*	Kg/h	132	
	Lb/h	291	
Evaporation power	l/h	59	
	USgallon/h	15,7	
Roll Ø	mm	650	
	inch	25,59	
Working length	mm	2.600	
	inch	102,36	
Height floor-feeding belts	mm	1.120	
	inch	44,09	
Working speed	mt/min	0,5 - 15	
	ft/min	1,6 - 49	
Electronic control	-	YES	
No. Programs	Nº	5	
Surface contact with linen	º	310	
Length folder + rear exit	-	OPT.	
Electric theoretical production* with folder	Kg/h	80	
	Lb/h	176	
Radiant gas theoretical production* with folder	Kg/h	92	
	Lb/h	203	
Evaporation power with folder	l/h	41	
	USgallon/h	10,9	
Working speed with folder	mt/min	2 - 10	
	ft/min	6,5 - 32	
POWER			
Electric heating	Kw	54	
Total electric power (elec. mod.)	Kw	55,05	
Gas heating	Kw	69	
Total electric power (gas mod.)	Kw	1,05	
Steam heating	Kw	76	
Total electric power (steam mod.)	Kw	1,05	
Roll motor power	Kw	0,55	
Fan motor power	Kw	0,25 x2	
Additional electric power with folder option	Kw	0,56	
Additional electric power with folder + rear exit option	Kw	0,74	
CONNECTIONS		E	G / S
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 10A
	nº x AWG/A	-	3 x 13 / 10A
Tension 230V III + T	nº x mm²/A	4 x 35 / 160A	4 x 2,5 / 10A
	nº x AWG/A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V III + N + T	nº x mm²/A	5 x 25 / 100A	5 x 2,5 / 10A
	nº x AWG/A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	3.445 / 3.745	
	inch	135,6 / 147,4	
Net / gross depth	mm	1.070 / 1.153	
	inch	42,1 / 45,4	
Net / gross depth with rear exit	mm	1.166 (1.488**) / 1.153	
	inch	45,9 (58,6**) / 45,4	
Net / gross height	mm	1.420 / 1.672	
	inch	55,9 / 65,8	



Net / gross weight	Kg	1.517 / 1.567
	Lb	3.344 / 3.455
Net / gross weight with folder	Kg	1.772 / 1.822
	Lb	3.907 / 4.017
Net / gross volume	m ³	5,23 / 7,22
	ft ³	185 / 255
Net / gross volume with folder	m ³	5,88 (7,27**) / 7,22
	ft ³	207 (257**) / 255
OTHERS		
Nº Fume outlet	Nº	2
Ø Extraction	mm	153
	inch	6
Airflow	m ³ /h	1.200
	cfm	706
Sound level	dB	65

* Theoretical production 45% moisture

** With open rear exit

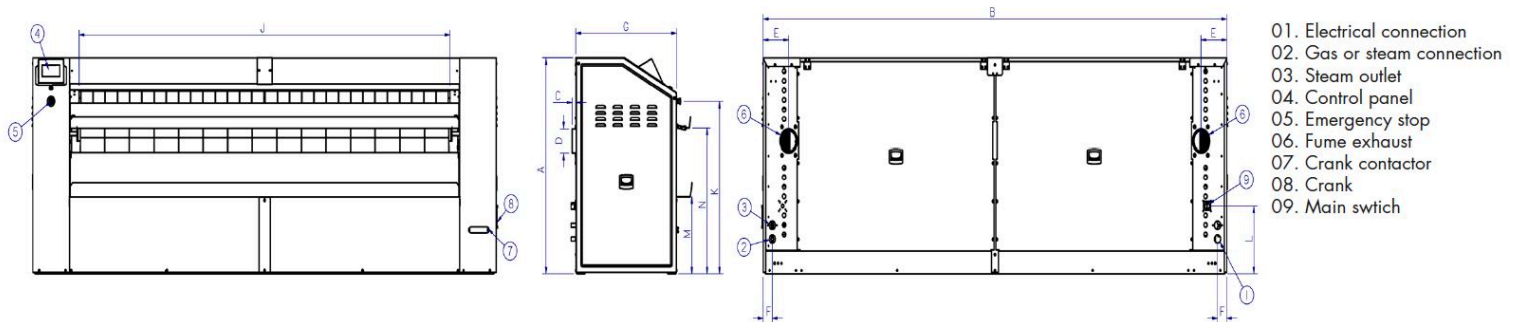

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
C-200/65	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
C-260/65	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
C-330/65	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952