Primer

DL-35 P
BASIC dryers

P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanized drum as standard.
Frequency inverter as standard.

EFFICIENCY

Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS


Biggest door diameters.
Opening sense of door adjustable on site.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

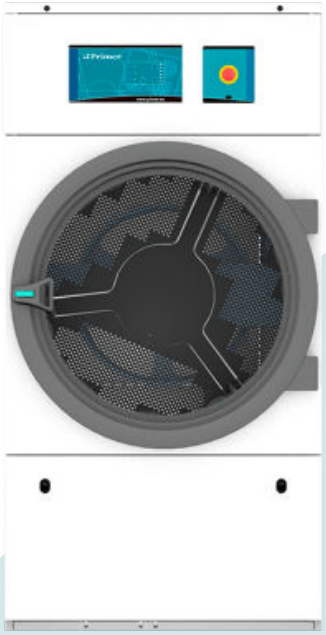


OPTIONS

- 400V 3~60Hz DL-28/35
- Opposite door opening 11 to 35
- Back panel with air filter 11 to 35
- NG gas option (Natural) for DL
- Display for P programmer
- 400V 3N 60 Hz
- 230V 3~ 50 Hz DL-22/28/35
- 230V 3~ 60 Hz DL-22/28/35
- 230V 3~ 60 Hz DL-11 to 35 G/S
- 440/480 V III 60 Hz DL-22/28/35
- Maritime wooden packing DL-35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DL-35 P	
Capacity 1/18	Kg	36,7	
	lb	80,8	
Capacity 1/20	Kg	33	
	lb	72,8	
Ø Drum	mm	947	
	inch	37,28	
Drum length	mm	936	
	inch	36,85	
Drum volume	l	660	
	cu ft	23,30	
Ø Door hole	mm	802	
	inch	31,57	
Door center height	mm	1.040	
	inch	40,94	
Height from floor to bottom of door	mm	578	
	inch	22,74	
ELECTRIC HEATING			
Evaporation capacity	L/h	31,1	
	US gallon/h	8,22	
Hourly output	Kg/h	60	
	lb/h	132,3	
Installed heating power	kW	36	
Installed electrical power	kW	37,15	
GAS HEATING			
Evaporation capacity (gas model)	L/h	32,1	
	US gallon/h	8,480	
Hourly output (gas model)	Kg/h	63,9	
	lb/h	140,9	
Installed gas heating power	kcal/h	35254	
	Btu/h	139899	
Installed gas heating power	kW	41	
Installed electrical power	kW	1,15	
Instant propane gas consumption (G31)	Kg/h	3,51	
	lb/h	7,74	
Instant natural gas consumption (G20)	m³/h	4,34	
	cfm	2,55	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
POWER AND VENTILATION			
Drum motor power	kW	0,55	
Fan motor power	kW	0,55	
Nominal air flow rate	m³/h	1.200	
	cfm	706	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	3,6	
	Btu/h	12291	
Max. front heat emission	kW	2,5	
	Btu/h	8604	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 50 / 125A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	985 / 1.065	
	inch	38,8 / 41,9	

Net / gross depth	mm	1.210 / 1.310
	inch	47,6 / 51,6
Net height / gross height without heating	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	260 / 285
	lb	573 / 628
OTHERS		
Sound level	dB	65

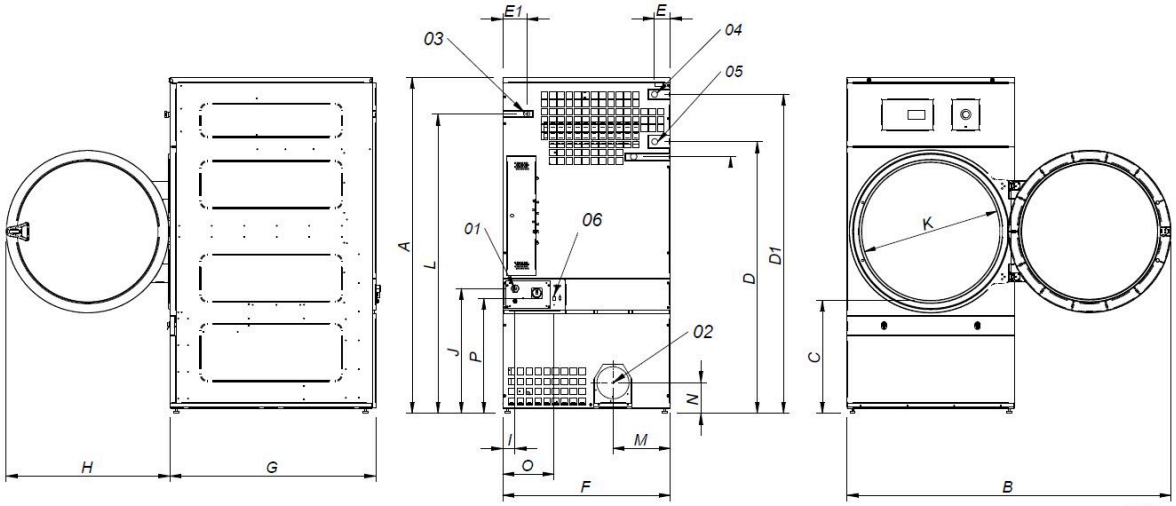

01 POWER SUPPLY
02 FUMES OUTPUT Ø200
03 GAS INLET 1/2"
04 STEAM INLET 1"
05 CONDENSATE OUTLET 1"
06 ETHERNET CONNECTION (only available CONTROL T2 models)

* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DL - 28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DL - 35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676