



# Primer

## PN-200/25 Nomex EXCELLENCE Wall Ironers Ø250

### ELECTRONIC CONTROL

#### **PN-100/25, PN-120/25, PN-140/25, PN-200/25**

- Digital screen: precise control of temperature.
- Preset ironing speeds, not adjustable.

#### **PN-140/25, PN-200/25 EXCELLENCE**

- Simple and user friendly with an **automatic mode**: automatic management of ironing speed according to the selected temperature.
- Digital speed and temperature display.

### EFFICIENCY

Acoustic comfort: 65 dB max.

Minimum space requirement: space saving, suitable for small spaces.

Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.

### ROBUSTNESS

**Nomex quality coating**: resistant to high temperatures (option, standard on EXCELLENCE).

Panels in grey Skinplate and stainless steel.

Wooden feeding board.

Industrial components, more durable.

### OUTSTANDING FEATURES

Large roll contact area with the linen.

Roll lifting control by pedal or automatic roll lifting control by foot cell detection.

Two available models:

- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.

#### **Modelos EXCELLENCE:**

- Large roll contact area with the linen.
- Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
- Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
- Adjustable speed and temperature.

### EASY MAINTENANCE

Easy installation : requires only an electrical connection.

Easy access on both sides for maintenance.

Quick and easy dismantling of bearings.

### OTHERS


Front feeding and return.

Roll Ø 250 mm.

Working widths: 1.000, 1.200, 1.400 and 2.000 mm.

Electric heating.

CE certification.

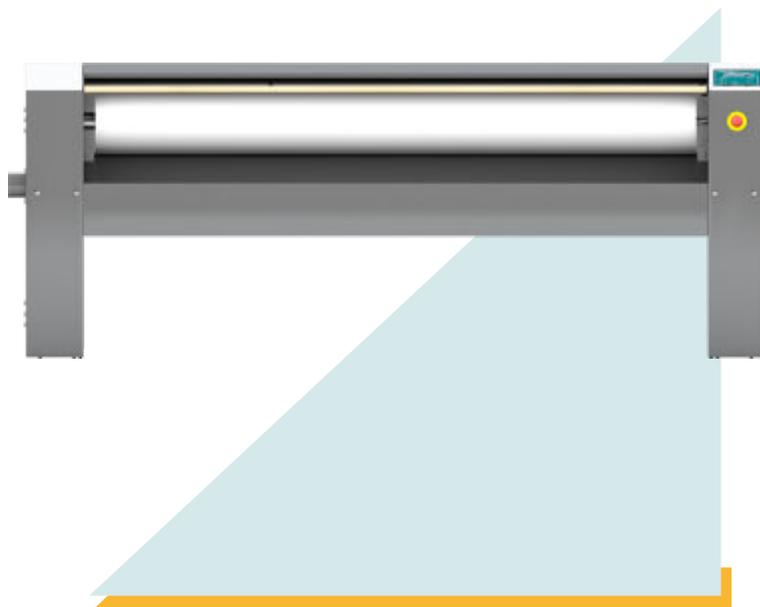


### OPTIONS

- 230 V I N 50 Hz (except mod. 200 EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS	UNIT.	PN-200/25 Nomex EXCELLENCE
Theoretical production: 20-25 humidity	Kg/h	50
	Lb/h	110,23
Roll Ø	mm	250
	inch	9,84
Working width	mm	2.000
	inch	78,74
Working speed	m/min	1.5-6
	ft/mn	4,9 - 19,6
Electronic control	-	YES
Chest motion	-	NO
POWER		
Heating power	Kw	12
Roll motor power	Kw	0.18
Fan motor power	Kw	0.12
Total electric power	Kw	12.3
CONNEXIONS		
Tension 230 V I + N + T	nº x mm <sup>2</sup> /A	-
	nº x AWG/A	-
Tension 230 V III + T	nº x mm <sup>2</sup> /A	4 x 10 / 40A
	nº x AWG/A	4 x 7 / 40A
Tension 400 V III + N + T	nº x mm <sup>2</sup> /A	5 x 4 / 20A
	nº x AWG/A	5 x 11 / 20A
DIMENSIONS		
Net / gross width	mm	2.523 / 2.490
	inch	99 / 98
Net / gross depth	mm	484 / 540
	inch	19 / 21
Net / gross height	mm	985 / 1.130
	inch	39 / 44
Net / gross weight gross	Kg	184 / 204
	Lb	406 / 450
Net / gross volume gross	m <sup>3</sup>	1,2 / 1,52
	ft <sup>3</sup>	42,48 / 53,66
OTHERS		
No. Fume outlet	Nº	1
Ø Fume outlet	mm	80
	inch	3,15
Air flow	m <sup>3</sup> /h	500
	cfm	294,29
Noise Level	dB	60



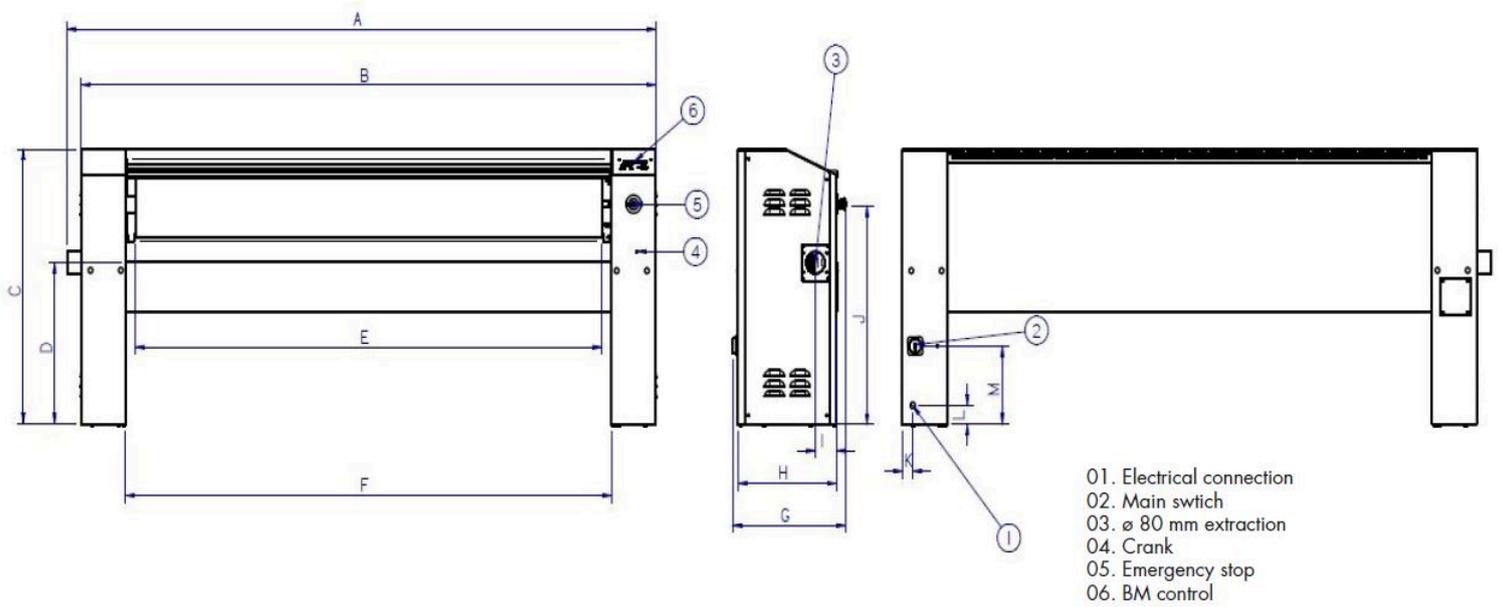

	A	B	C	D	E	F	G	H	I	J	K	L	M
PN-140/25 EXCELLENCE	1.922	1.862	985	610	1.400	1.480	484	423	91	791	45	75	287
PN-200/25 EXCELLENCE	2.522	2.462	985	610	2.000	2.080	484	423	91	791	45	75	287