



### T2 CONTROL

User friendly and totally programmable 7" T2.  
 USB Connection.  
 Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
 Videos on display (ads, instructions, etc.).  
 37 languages.

### OUTSTANDING FEATURES

Reversing drum action as standard.  
 Stainless steel drum as standard.  
 Frequency inverter as standard.

### EFFICIENCY

SMART DRY: Intelligent humidity control with a new drum inlet temperature control.  
 AIR RECOVERY SYSTEM: Efficient air recirculation system  
 INSULATED PANEL: Complete air-flow circuit and double glass in the door.  
 FULL FLOW: Optimized system of mixed airflow.  
 Big fluff filter.

### CONNECTIVITY

IoT - **PRIMERLINK** standard.  
 Management of laundries.

### VERSATILITY

Make to order: Customisation.  
 Wet Cleaning.

### ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
 Biggest door diameters.  
 Opening sense of door adjustable on site.

### EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.  
 Technical menu: statistics for technicians.

### OTHERS

Grey skinplate outer casing, stainless steel look.  
 Integrated Fire Extinguishing System.  
 EFFICIENT DRUM: the new drum with stamped holes.  
 COOL DOWN: anti-wrinkle at the end of the cycle.  
 Heating options: electric, gas and steam.  
 CE approved.




### OPTIONS

- License IoT - PrimerLink
- Automatic sliding door DE-45/60/80
- Manual sliding door DE-45/60/80 (no double glass)
- Tiltting front kit DE-45/60/80
- Opposite door opening DE-45/60/80
- Tropicalized model
- Perfume dosage
- Back panel with air filter DE-45/60/80
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Stainless steel front and side panels DE-60
- Front panel in stainless steel DE-45/60/80
- Low pressure steam battery DE-45/60/80
- NG gas option (Natural)
- 400 V III N 60 Hz DE-45/60/80 E/S
- 400 V III N 60 Hz DE-45/60/80 G
- 230 V III 50 Hz DE-45/60/80 G/S
- 230 V III 60 Hz DE-45/60/80 S
- 230 V III 60 Hz DE-45/60/80 G
- 400 V III 50 Hz DE-60/80
- 440/480V III 60 Hz DE-45/60/80
- 230 V III 50 Hz 45/60/80 E
- 230 V III 60 Hz 45/60/80 E
- Maritime wooden packing DE-60

CAPACITY & DRUM	UNIT.	DE-60 T2
Capacity 1/18	Kg	66,7
	lb	146,9
Capacity 1/20	Kg	60
	lb	132,3
Ø Drum	mm	1.225
	inch	48,23
Drum length	mm	1.020
	inch	40,16
Drum volume	l	1.200
	cu ft	42,37
Ø Door hole	mm	802
	inch	31,57
Door center height	mm	1.275
	inch	50,20
Height from floor to bottom of door	mm	813
	inch	31,99
ELECTRIC HEATING		
Evaporation capacity	L/h	64
	US gallon/h	16,91
Hourly output	Kg/h	128,60
	lb/h	283,5
Installed heating power	kW	72
Installed electrical power	kW	75,35
Drum motor power	kW	1,10
GAS HEATING		
Evaporation capacity (gas model)	L/h	72
	US gallon/h	19,020
Hourly output (gas model)	Kg/h	144
	lb/h	317,5
Installed gas heating power	kcal/h	77386
	Btu/h	307092,7
Installed gas heating power	kW	90
Installed electrical power	kW	3,35
Instant propane gas consumption (G31)	Kg/h	7,71
	lb/h	17
Instant natural gas consumption (G20)	m <sup>3</sup> /h	9,53
	cfm	5,61
Ø Gas inlet	BSPP ISO 228-1	3/4"
STEAM HEATING		
Installed steam heating power	kW	128
	Btu/h	436754
Installed electrical power	kW	3,35
Steam consumption (8 barG) - Standard	kg/h	171
Steam consumption (116 psiG)	lb/h	206
Steam pressure	barG	7 - 12
	psiG	101,5 - 177
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	147
Steam consumption (72,5 psiG) - Low Pressure	lb/h	177,1
Steam pressure (low pressure)	barG	4 - 7
	psiG	58 - 101,5
Low pressure steam inlet - outlet	BSPT- ISO7.1	1" 1/2
THERMAL OIL HEATING		
Installed heating power	kW	128
Installed electrical power	kW	3,35
Fluid consumption (T max 175°C)	m <sup>3</sup> /h	10



Thermal oil connection	BSP	1" 1/2	
<b>VENTILATION</b>			
Fan motor power	kW	2,20	
Nominal air flow rate	m <sup>3</sup> /h	4.500	
	cfm	2648,60	
Ø Fume exhaust	mm	300	
Ø Fume exhaust	inch	11,81	
<b>HEAT EMISSION</b>			
Maximum total heat emission	kW	5,04	
	Btu/h	17207,3	
Max. front heat emission	kW	1,44	
	Btu/h	4916,4	
<b>CONNECTIONS</b>			
Tension 230V - I + N + T	Nº x mm <sup>2</sup> / A	-	-
Tension 230V - III + T	Nº x mm <sup>2</sup> / A	-	4 x 2,5 / 25A
Tension 400V - III + N + T	Nº x mm <sup>2</sup> / A	5 x 50 / 125A	5 x 2,5 / 25A
<b>NET DIMENSIONS / D. WITH PACKING</b>			
Net / gross width	mm	1.270 / 1.330	
	inch	50 / 52,36	
Net / gross depth	mm	1.366 / 1.455	
	inch	53,78 / 57,28	
Net height / gross height without heating	mm	2.380 /*2.200	
	inch	93,70 / *86,61	
Net / gross weight	Kg	529 / 575	
	lb	1.166,25 / 1.267,66	
<b>OTHERS</b>			
Sound level	dB	67	

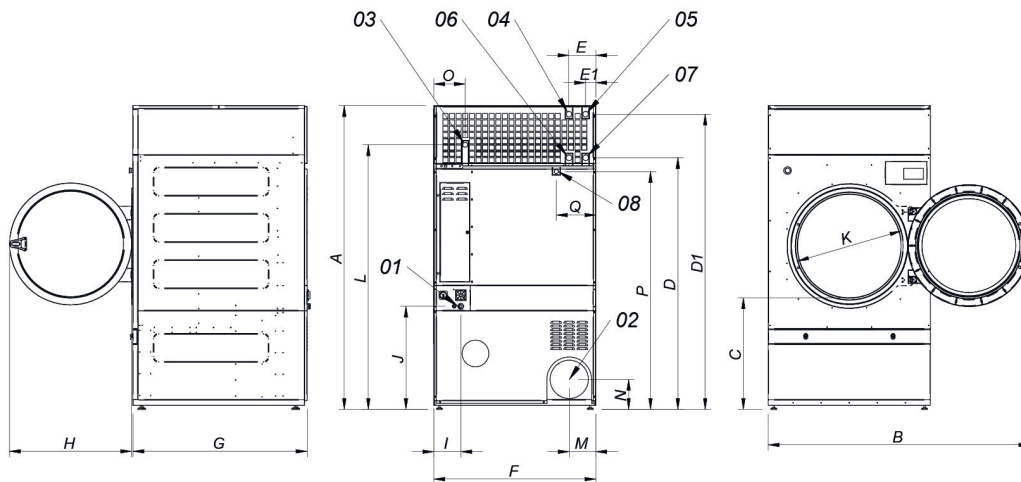

- 01. Electric connection
- 02. Fumes outlet ø300
- 03. Gas connection 3/4"
- 04. Steam connection 1" (45kg)
- 05. Steam connection 1" (60kg / 80kg)
- 06. Condensation outlet 1" (45kg)
- 07. Condensation outlet 1" (60kg / 80kg)
- 08. Fire extinguisher water valve 3/4"
- 09. Ethernet connection

\* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
DE-45	2380*	2045	874	1981	2311	211	80	1270	1106	956	248	935	802	2088	214	240	244	1841	308	160	1053
DE-60	2380*	2045	874	1981	2311	211	80	1270	1366	956	248	935	802	2088	214	240	244	1841	308	160	1053
DE-80	2380*	2045	874	1981	2311	211	80	1270	1598	956	248	935	802	2088	214	240	244	1841	308	160	1053

