



# Primer

## RS-11 T2

## Low spin washers

### T2 CONTROL

User friendly and totally programmable 7".  
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
Videos on display (ads, instructions, etc.).  
37 languages.  
8 dosing signals as standard.

### G FACTOR

FACTOR G 200: 11 - 45 kg.  
FACTOR G 150: 60 - 80 kg.

### CONNECTIVITY

**PRIMERLINK** - Standard and free IoT connectivity.  
Remote technical service.  
Management of laundries: OPL.  
Remote payment.

### EFFICIENCY

Intelligent consumption: automatic adjustment of water and soap consumptions (standard).  
OPTIMAL KG: manual indication of weight.  
Low water consumption.

### VERSATILITY

Make to order: customisation.  
OPL < > Self-service.  
Electric < > Hot water.  
Wet Cleaning.

### ERGONOMICS

Easy opening/closing system for door lock.  
Biggest door diameters:  
• Ø 373 (11, 14 kg)  
• Ø 460 (18, 22, 28 kg)  
• Ø 560 (35, 45, 60, 80kg)

### EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians.  
Equivalent parts for all models: electronic parts, contactors.

### OTHERS

Hard mounted washers.  
Anchoring to floor with anchoring base.  
Panels in skinplate.  
Drum and vat in stainless steel AISI 304.  
3 water inlets.  
CB and WRAS approved product. Option ETL.  
REG4 strandard certified by KIWA.



### OPTIONS


- License IoT - PrimerLink
- DQ-2 Dosing pump kit. 2 pumps with guide support.
- Extra detergent dosage DB-1
- SLUICE - Drum with Ø 8 mm holes RS-11
- Fixation base RS-11
- 3" EXTERNAL double drain kit (recom. for RS-11/14)
- Ready for SAVETANK conn. 3/4" for washers LS/RS-11 to 28
- Normally closed valve RS-11
- Water Recycle RS-11
- 6 extra dosing signals card for RS-11 to 45C
- Silicon door gasket RS-11/14
- Reversible door: reverse door opening
- Tropicalized model: protected board (T2)
- Kit to transform an E or HW for RS-11/14/18/22
- Stainless steel outer casing RS-11
- Stainless steel AISI 304 top and front panel for DLS-11
- 440 V III No N 50/60 Hz RS-11
- KIT 110/230 V 1/2K0V RS-11/14/18
- Several payment systems for self-service

| DRUM                                    | UNIT.                    | RS-11 T2      |               |
|---|--------------------------|---------------|---------------|
| Capacity 1/9                            | Kg                       | 11            |               |
| Capacity 1/10                           | Kg                       | 10            |               |
| Volume                                  | l                        | 100           |               |
| Diameter                                | mm                       | 620           |               |
| Depth                                   | mm                       | 330           |               |
| GENERAL DETAILS                         |                          |               |               |
| Washing speed / Spining speed           | r.p.m.                   | 53 / 759      |               |
| G Factor                                | -                        | 200           |               |
| Maximum force transmitted               | KN                       | 2,0 ±3        |               |
| Frequency-dynamic force                 | Hz                       | 8,93          |               |
| Noise level                             | dB                       | < 70          |               |
| Coin laundry version                    | -                        | YES           |               |
| Double drain                            | -                        | NO            |               |
| Weighing system / Tilting door          | -                        | NO            |               |
|   |                          | NO            |               |
| SLUICE option                           | -                        | YES           |               |
| DOOR                                    |                          |               |               |
| Height center door / Height door        | mm                       | 570 / 310     |               |
| Diameter                                | mm                       | 373           |               |
| POWER                                   |                          |               |               |
| Motor                                   | kW                       | 1,1           |               |
| Electric heating power                  | kW                       | 6             |               |
| Total electric power (electric model)   | kW                       | 6,25          |               |
| Total electric power (hw, steam model)  | kW                       | 1,1           |               |
| CONNECTIONS                             |                          | E             | HW/S          |
| Tension 110V - I + N + T                | Nº x mm <sup>2</sup> / A | -             | -             |
| Tension 230V - I + N + T                | Nº x mm <sup>2</sup> / A | 2x6+T - 40A   | 2x1,5+T - 16A |
| Tension 230V - III + T                  | Nº x mm <sup>2</sup> / A | 3x2,5+T - 20A | -             |
| Tension 400V - III + N + T              | Nº x mm <sup>2</sup> / A | 4x1,5+T - 16A | -             |
| Steam inlet (Steam model)               | inch                     | 1/2"          |               |
| Maximum steam consumption (Steam model) | Kg/h                     | 7             |               |
| Water inlet                             | inch                     | 3/4"          |               |
| Water main pressuer                     | Kg/cm <sup>2</sup>       | 2-4           |               |
| Maximum water consumption*              | l / h                    | 61,5*         |               |
| Drain                                   | mm/inch                  | 3"            |               |
| Drainage capacity                       | l / min                  | 200           |               |
| DIMENSIONS / PACKING DIMENSIONS         |                          |               |               |
| Net Width/Gross width                   | mm                       | 719 / 782     |               |
| Net Depth/Gross depth                   | mm                       | 755 / 890     |               |
| Net Height / Gross height               | mm                       | 1.165 / 1.400 |               |
| Net weight / Gross weight               | kg                       | 198 / 231,6   |               |
| Volume                                  | m <sup>3</sup>           | 0,97          |               |

\* Program nº20, 75% load

\*\* Program nº2, 100% load



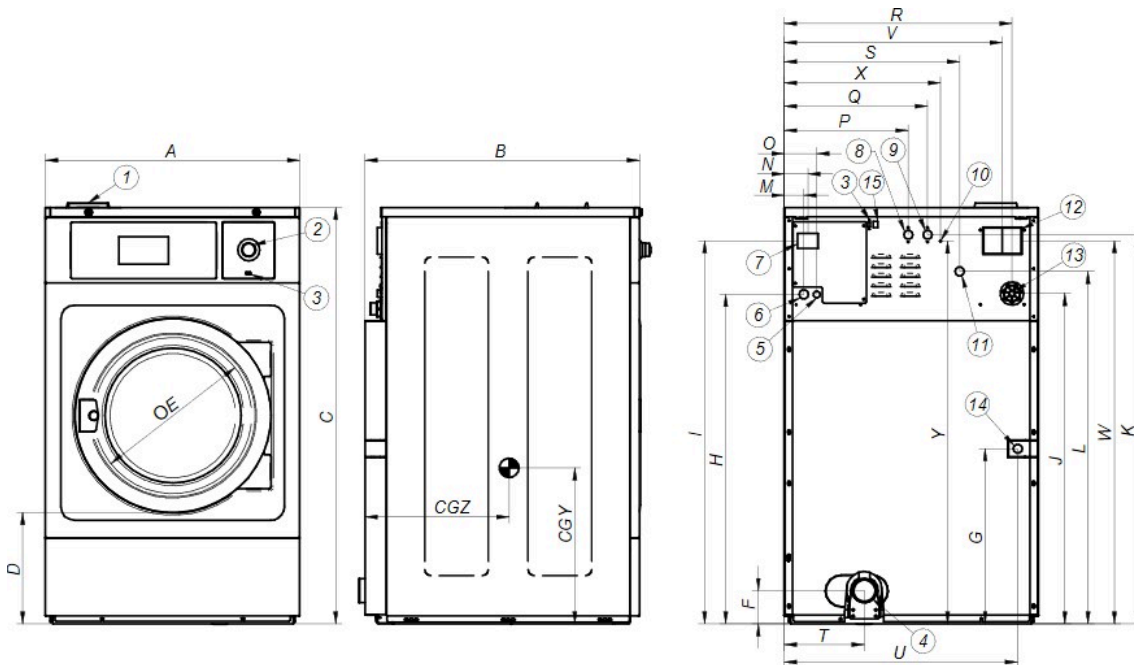

1. Soap dispenser
2. Emergency stop
3. USB Port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port
16. Clean side light

|       |      | A     | B     | C     | D     | E     | F    | G     | H     | I     | J     | K     | L     | M    | N    | O    | P     | Q     | R     | S     | T    | U     | V     | W     | X     | Y     | CGY   | CGZ   |
|-------|------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|------|------|------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|
| RS-11 | mm   | 719   | 755   | 1.165 | 310   | 373   | 148  | 440   | 886   | 1.054 | 889   | 1.073 | 958   | 61   | 74   | 101  | 316   | 376   | 637   | 475   | 211  | 654   | 607   | 1.053 | 416   | 1.053 | 383   | 511   |
|       | inch | 28,31 | 29,72 | 45,87 | 12,20 | 14,69 | 5,83 | 17,32 | 34,88 | 41,50 | 35,00 | 42,24 | 37,72 | 2,40 | 2,91 | 3,98 | 12,44 | 14,80 | 25,08 | 18,70 | 8,31 | 25,75 | 23,90 | 41,46 | 16,38 | 41,46 | 15,08 | 20,12 |