



T2 CONTROL

User friendly and totally programmable 7" T2.
 USB Connection.
 Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
 Videos on display (ads, instructions, etc.).
 37 languages.

OUTSTANDING FEATURES

Reversing drum action as standard.
 Stainless steel drum as standard.
 Frequency inverter as standard.

EFFICIENCY

SMART DRY: Intelligent humidity control with a new drum inlet temperature control.
 AIR RECOVERY SYSTEM: Efficient air recirculation system
 INSULATED PANEL: Complete air-flow circuit and double glass in the door.
 FULL FLOW: Optimized system of mixed airflow.
 Big fluff filter.

CONNECTIVITY

IoT - **PRIMERLINK** standard.
 Management of laundries.

VERSATILITY

Make to order: Customisation.
 Wet Cleaning.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
 Biggest door diameters.
 Opening sense of door adjustable on site.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
 Technical menu: statistics for technicians.

OTHERS

Grey skinplate outer casing, stainless steel look.
 Integrated Fire Extinguishing System.
 EFFICIENT DRUM: the new drum with stamped holes.
 COOL DOWN: anti-wrinkle at the end of the cycle.
 Heating options: electric, gas and steam.
 CE approved.




OPTIONS

- License IoT - PrimerLink
- Automatic sliding door DE-45/60/80
- Manual sliding door DE-45/60/80 (no double glass)
- Tiltting front kit DE-45/60/80
- Opposite door opening DE-45/60/80
- Tropicalized model
- Perfume dosage
- Back panel with air filter DE-45/60/80
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Stainless steel front and side panels DE-45
- Front panel in stainless steel DE-45/60/80
- Low pressure steam battery DE-45/60/80
- NG gas option (Natural)
- 400 V III N 60 Hz DE-45/60/80 E/S
- 400 V III N 60 Hz DE-45/60/80 G
- 230 V III 50 Hz DE-45/60/80 G/S
- 230 V III 60 Hz DE-45/60/80 S
- 230 V III 60 Hz DE-45/60/80 G
- 440/480V III 60 Hz DE-45/60/80
- 230 V III 50 Hz 45/60/80 E
- 230 V III 60 Hz 45/60/80 E
- Maritime wooden packing DE-45

CAPACITY & DRUM		UNIT.	DE-45 T2
Capacity 1/18		Kg	50
		lb	110,2
Capacity 1/20		Kg	45
		lb	99,2
Ø Drum		mm	1.225
		inch	48,23
Drum length		mm	760
		inch	29,92
Drum volume		l	900
		cu ft	31,78
Ø Door hole		mm	802
		inch	31,57
Door center height		mm	1.275
		inch	50,20
Height from floor to bottom of door		mm	813
		inch	31,99
ELECTRIC HEATING			
Evaporation capacity		L/h	45
		US gallon/h	11,9
Hourly output		Kg/h	90
		lb/h	198,4
Installed heating power		kW	54
Installed electrical power		kW	57
Drum motor power		kW	0,75
GAS HEATING			
Evaporation capacity (gas model)		L/h	48,20
		US gallon/h	12,733
Hourly output (gas model)		Kg/h	96,40
		lb/h	212,5
Installed gas heating power		kcal/h	51591
		Btu/h	204728,5
Installed gas heating power		kW	60
Installed electrical power		kW	3
Instant propane gas consumption (G31)		Kg/h	5,14
		lb/h	11,33
Instant natural gas consumption (G20)		m ³ /h	6,35
		cfm	3,74
Ø Gas inlet		BSPP ISO 228-1	3/4"
STEAM HEATING			
Installed steam heating power		kW	91
		Btu/h	310505
Installed electrical power		kW	3
Steam consumption (8 barG) - Standard		kg/h	121
Steam consumption (116 psiG)		lb/h	145,8
Steam pressure		barG	7 - 12
		psiG	101,5 - 175
Standard steam inlet - outlet		BSPT- ISO7.1	1"
Standard steam inlet - outlet		NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure		kg/h	142
Steam consumption (72,5 psiG) - Low Pressure		lb/h	171,1
Steam pressure (low pressure)		barG	4 - 7
		psiG	58 - 101,5
Low pressure steam inlet - outlet		BSPT- ISO7.1	1" 1/2
THERMAL OIL HEATING			
Installed heating power		kW	91
Installed electrical power		kW	3
Fluid consumption (T max 175°C)		m ³ /h	7



Thermal oil connection	BSP	1" 1/2	
VENTILATION			
Fan motor power	kW	2,20	
Nominal air flow rate	m ³ /h	4.500	
	cfm	2648,60	
Ø Fume exhaust	mm	300	
Ø Fume exhaust	inch	11,81	
HEAT EMISSION			
Maximum total heat emission	kW	3,78	
	Btu/h	12905,4	
Max. front heat emission	kW	1,08	
	Btu/h	3687,3	
CONNECTIONS			
Tension 230V - I + N + T	Nº x mm ² / A	-	-
Tension 230V - III + T	Nº x mm ² / A	-	4 x 2,5 / 20A
Tension 400V - III + N + T	Nº x mm ² / A	5 x 35 / 100A	5 x 2,5 / 20A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	1.270 / 1.330	
	inch	50 / 52,36	
Net / gross depth	mm	1.106 / 1.185	
	inch	43,54 / 46,65	
Net height / gross height without heating	mm	2.380 /*2.200	
	inch	93,70 / *86,61	
Net / gross weight	Kg	395 / 430	
	lb	870,83 / 947,99	
OTHERS			
Sound level	dB	67	

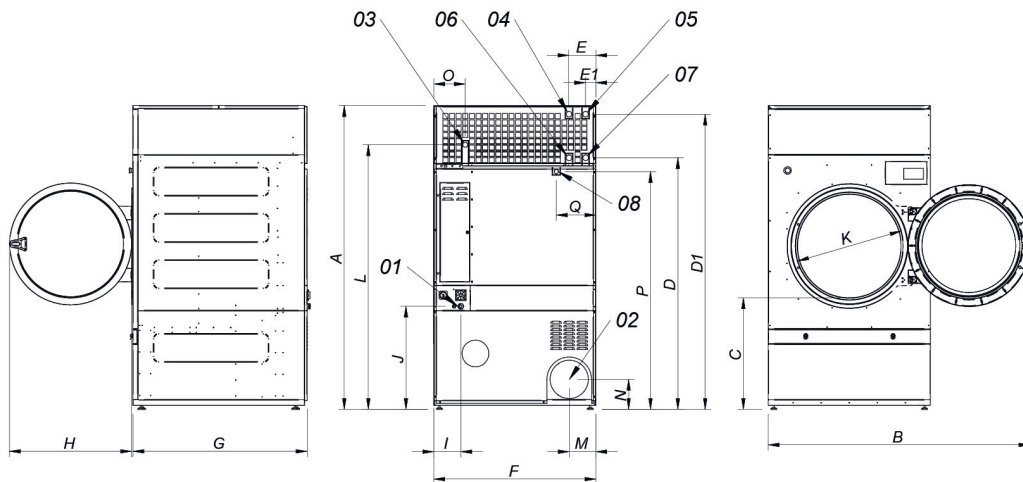

- 01. Electric connection
- 02. Fumes outlet ø300
- 03. Gas connection 3/4"
- 04. Steam connection 1" (45kg)
- 05. Steam connection 1" (60kg / 80kg)
- 06. Condensation outlet 1" (45kg)
- 07. Condensation outlet 1" (60kg / 80kg)
- 08. Fire extinguisher water valve 3/4"
- 09. Ethernet connection

* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
DE-45	2380*	2045	874	1981	2311	211	80	1270	1106	956	248	935	802	2088	214	240	244	1841	308	160	1053
DE-60	2380*	2045	874	1981	2311	211	80	1270	1366	956	248	935	802	2088	214	240	244	1841	308	160	1053
DE-80	2380*	2045	874	1981	2311	211	80	1270	1598	956	248	935	802	2088	214	240	244	1841	308	160	1053

