



P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanized drum as standard.
Frequency inverter as standard.

EFFICIENCY

Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS


Biggest door diameters.
Opening sense of door adjustable on site.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved

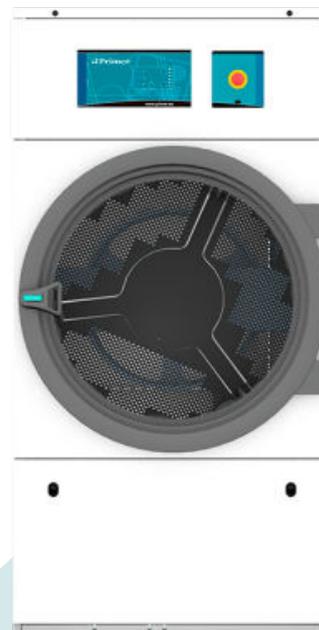


OPTIONS

- Opposite door opening 11 to 35
- Back panel with air filter 11 to 35
- NG gas option (Natural) for DL
- Display for P programmer
- 400 V III N 60 Hz
- 230 V III 50 Hz DL-22/28/35
- 230 V III 60 Hz DL-22/28/35
- 230 V III 60 Hz DL-11 to 35 G/S
- 440/480 V III 60 Hz DL-22/28/35
- Maritime wooden packing DL-28
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DL-28 P	
Capacity 1/18		Kg	30,6	
		lb	67,3	
Capacity 1/20		Kg	27,5	
		lb	60,6	
Ø Drum		mm	947	
		inch	37,28	
Drum length		mm	780	
		inch	30,71	
Drum volume		l	550	
		cu ft	19,42	
Ø Door hole		mm	802	
		inch	31,57	
Door center height		mm	1.040	
		inch	40,94	
Height from floor to bottom of door		mm	578	
		inch	22,74	
ELECTRIC HEATING				
Evaporation capacity		L/h	26,1	
		US gallon/h	6,9	
Hourly output		Kg/h	48,4	
		lb/h	106,7	
Installed heating power		kW	30	
Installed electrical power		kW	31,15	
GAS HEATING				
Evaporation capacity (gas model)		L/h	30,9	
		US gallon/h	8,163	
Hourly output (gas model)		Kg/h	59,3	
		lb/h	130,7	
Installed gas heating power		kcal/h	35254	
		Btu/h	139899	
Installed gas heating power		kW	41	
Installed electrical power		kW	1,15	
Instant propane gas consumption (G31)		Kg/h	3,51	
		lb/h	7,74	
Instant natural gas consumption (G20)		m ³ /h	4,34	
		cfm	2,55	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
POWER AND VENTILATION				
Drum motor power		kW	0,55	
Fan motor power		kW	0,55	
Nominal air flow rate		m ³ /h	1.200	
		cfm	706	
Ø Fume exhaust		mm	200	
Ø Fume exhaust		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	3	
		Btu/h	10242	
Max. front heat emission		kW	2,1	
		Btu/h	7170	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm ² / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 35 / 100A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	985 / 1.065	
		inch	38,8 / 41,9	



Net / gross depth	mm	1.054 / 1.154
	inch	41,5 / 45,4
Net height / gross height without heating	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	230 / 260
	lb	507 / 573
OTHERS		
Sound level	dB	65

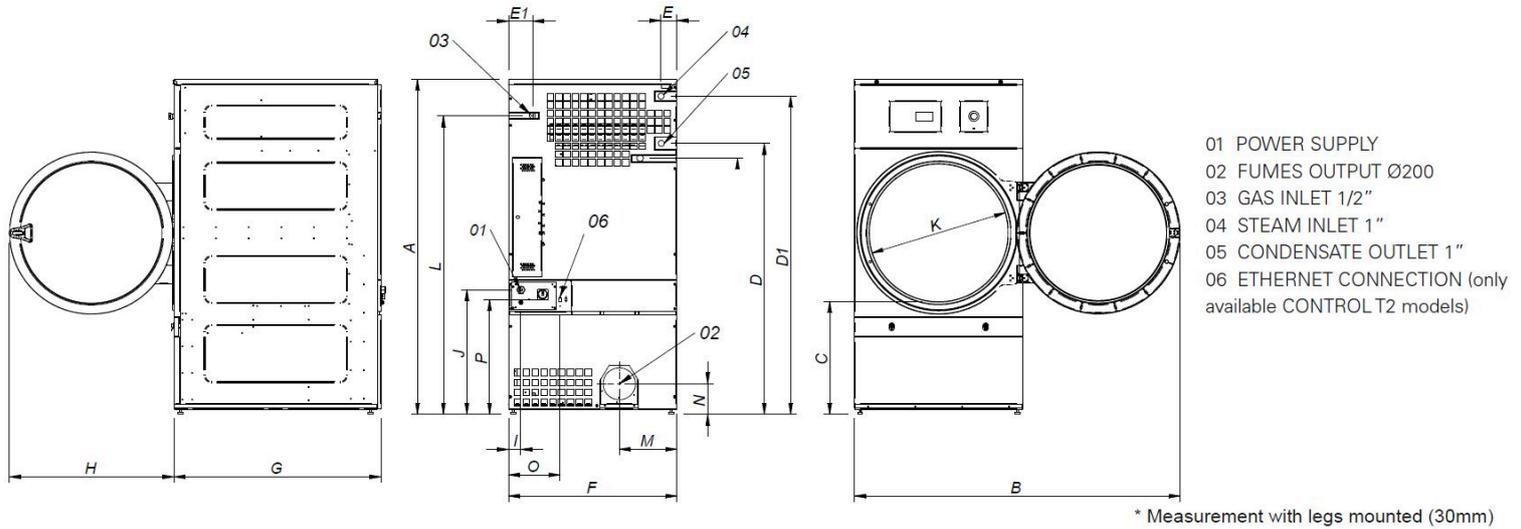

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DL - 28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DL - 35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676

