



ELECTRONIC CONTROL

PN-100/25, PN-120/25, PN-140/25, PN-200/25

- Digital screen: precise control of temperature.
- Preset ironing speeds, not adjustable.

PN-140/25, PN-200/25 EXCELLENCE

- Simple and user friendly with an **automatic mode**: automatic management of ironing speed according to the selected temperature.
- Digital speed and temperature display.

EFFICIENCY

Acoustic comfort: 65 dB max.

Minimum space requirement: space saving, suitable for small spaces.

Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.

ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on EXCELLENCE).

Panels in grey Skinplate and stainless steel.

Wooden feeding board.

Industrial components, more durable.

OUTSTANDING FEATURES

Large roll contact area with the linen.

Roll lifting control by pedal or automatic roll lifting control by foot cell detection.

Two available models:

- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.

Modelos EXCELLENCE:

- Large roll contact area with the linen.
- Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
- Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
- Adjustable speed and temperature.

EASY MAINTENANCE

Easy installation : requires only an electrical connection.

Easy access on both sides for maintenance.

Quick and easy dismantling of bearings.

OTHERS

Front feeding and return.

Roll Ø 250 mm.

Working widths: 1.000, 1.200, 1.400 and 2.000 mm.

Electric heating.

CE certification.




OPTIONS

- Pedal control instead of photocell (except mod. EXCELLENCE)
- 230 V I N 50 Hz (except mod. 200 EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS		UNIT.	PN-100/25
Theoretical production: 20-25 humidity	Kg/h	25	
	Lb/h	55,12	
Roll Ø	mm	250	
	inch	9,84	
Working width	mm	1.000	
	inch	39,37	
Working speed	m/min	4.2	
	ft/mn	13,77	
Electronic control	-	YES	
Chest motion	-	Automático	
POWER			
Heating power	Kw	4,95	
Roll motor power	Kw	0,18	
Total electric power	Kw	5,13	
CONNEXIONS			
Tension 230 V I + N + T	nº x mm²/A	3 x 6 / 25A	
	nº x AWG/A	3 x 9 / 25A	
Tension 230 V III + T	nº x mm²/A	4 x 2,5 / 16A	
	nº x AWG/A	4 x 13 / 16A	
Tension 400 V III + N + T	nº x mm²/A	5 x 2,5 / 10A	
	nº x AWG/A	5 x 13 / 10A	
DIMENSIONS			
Net / gross width	mm	1.462 / 1.490	
	inch	58 / 59	
Net / gross depth	mm	484 / 540	
	inch	19 / 21	
Net / gross height	mm	985 / 1.130	
	inch	39 / 44	
Net / gross weight gross	Kg	114 / 124	
	Lb	251 / 273	
Net / gross volume gross	m³	0,69 / 0,91	
	ft³	24,37 / 32,14	
OTHERS			
No. Fume outlet	Nº	-	
Ø Fume outlet	mm	-	
	inch	-	
Air flow	m³/h	-	
	cfm	-	
Noise Level	dB	55	



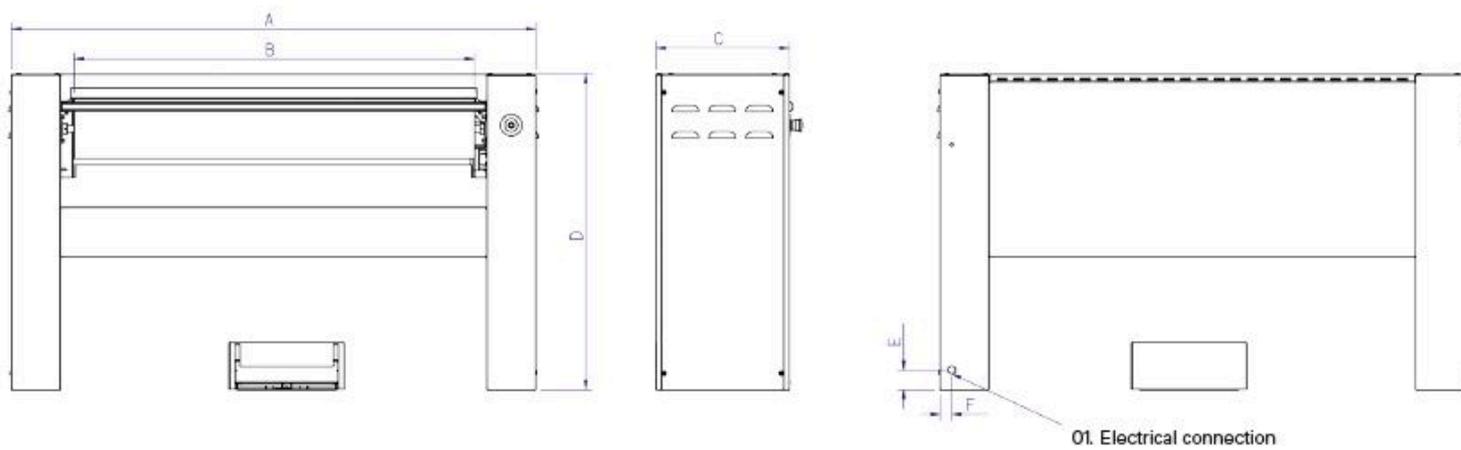

	A	B	C	D	E	F
PN-100/18	1694	1447	689	1354	68	785
PN-120/18	1694	1447	689	1354	68	785