



# Primer

## RS-28 T2

## Low spin washers

### T2 CONTROL

User friendly and totally programmable 7".  
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
Videos on display (ads, instructions, etc.).  
37 languages.  
8 dosing signals as standard.

### G FACTOR

FACTOR G 200: 11 - 45 kg.  
FACTOR G 150: 60 - 80 kg.

### CONNECTIVITY

**PRIMERLINK** - Standard and free IoT connectivity.  
Remote technical service.  
Management of laundries: OPL.  
Remote payment.

### EFFICIENCY

Intelligent consumption: automatic adjustment of water and soap consumptions (standard).  
OPTIMAL KG: manual indication of weight.  
Low water consumption.

### VERSATILITY

Make to order: customisation.  
OPL < > Self-service.  
Electric < > Hot water.  
Wet Cleaning.

### ERGONOMICS


Easy opening/closing system for door lock.  
Biggest door diameters:  
• Ø 373 (11, 14 kg)  
• Ø 460 (18, 22, 28 kg)  
• Ø 560 (35, 45, 60, 80kg)

### EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians.  
Equivalent parts for all models: electronic parts, contactors.

### OTHERS

Hard mounted washers.  
Anchoring to floor with anchoring base.  
Panels in skinplate.  
Drum and vat in stainless steel AISI 304.  
3 water inlets.  
CB and WRAS approved product. Option ETL.  
REG4 standard certified by KIWA.

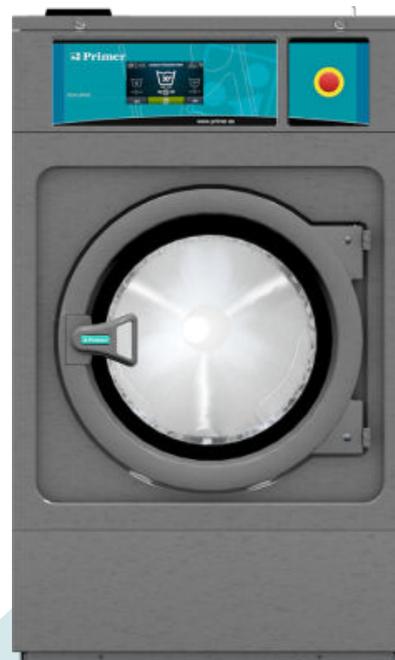

### OPTIONS

- License IoT - PRIMERLINK
- DQ-2 Dosing pump kit. 2 pumps with guide support.
- Extra detergent dosage DB-1
- SLUICE - Drum with Ø 8 mm holes RS-28
- Anchoring base RS-28
- Double drain kit for RS-18/22/28/35C/45C
- Ready for SAVETANK XL conn. 3/4" for washers LS/RS-11 to 28
- Normally closed valve RS-28
- Water Recycle RS-28
- 6 extra dosing signals card for RS-11 to 45C
- Silicon door gasket RS-18 / 22 / 28
- Reversible door: reverse door opening
- Tropicalized model: protected board (T2)
- Steam kit to transform an E or HW RS-28/RS-35C/45C
- Stainless steel AISI 304 outer casing for RS-28
- Stainless steel AISI 304 top and front panel for RS-28
- Kit watermark Australia
- 440 V 3~ No N 50/60 Hz RS-28 (marine)
- 230V 3~ 50/60Hz RS-28 E
- Several payment systems for self-service


TECHNICAL DATA	UNIT.	RS-28 T2	
<b>DRUM</b>			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
	gal	73,9	
Diameter	mm	770	
	inch	30,3	
Depth	mm	585	
	inch	23	
<b>GENERAL DATA</b>			
Washing speed / Spin speed	r.p.m.	48/682	
G factor	-	200	
Maximum transmitted force	KN	3,68 ±6	
Dynamic force frequency	Hz	8,02	
Sound level	dB	< 70	
Self-service version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting system	-	NO	
SLUICE option	-	YES	
<b>DOOR</b>			
Door centre height / Door base height	mm	700 / 400	
	inch	27,5"/15,7"	
Diameter	mm	460	
	inch	18,1"	
<b>POWER</b>			
Motor	kW	4	
Electric heating (electric model)	kW	18	
Maximum electric power	kW	19,2	
Max. power steam & hot water model	kW	4	
<b>CONNECTIONS</b>		<b>E</b>	<b>HW/S</b>
Voltage 110V - 1 + N + E	Nº x mm <sup>2</sup> / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm <sup>2</sup> / A	-	3x4 / 32A
	Nº x AWG / A	-	3x11 / 20A
Voltage 230V - 3 + E	Nº x mm <sup>2</sup> / A	4x16 / 63A	4x2,5 / 20A
	Nº x AWG / A	4x5 / 60A	4x13 / 20A
Voltage 400V - 3 + N + E	Nº x mm <sup>2</sup> / A	5x4 / 32A	5x1,5 / 16A
	Nº x AWG / A	5x11 / 40A	5x15 / 15A
Steam inlet (steam model)	inch	3/4"	3/4"
Max. steam consumption (steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm <sup>2</sup>	2-4	
Max. water consumption*	Lit/h	164,8*	
	GPH	43,5*	
Drain	mm/inch	3"	

Programme no.20, 75% load

\*\*Programme no.2, 100% load

\*\*\* 400V version = 48kW / 230V = 36kW



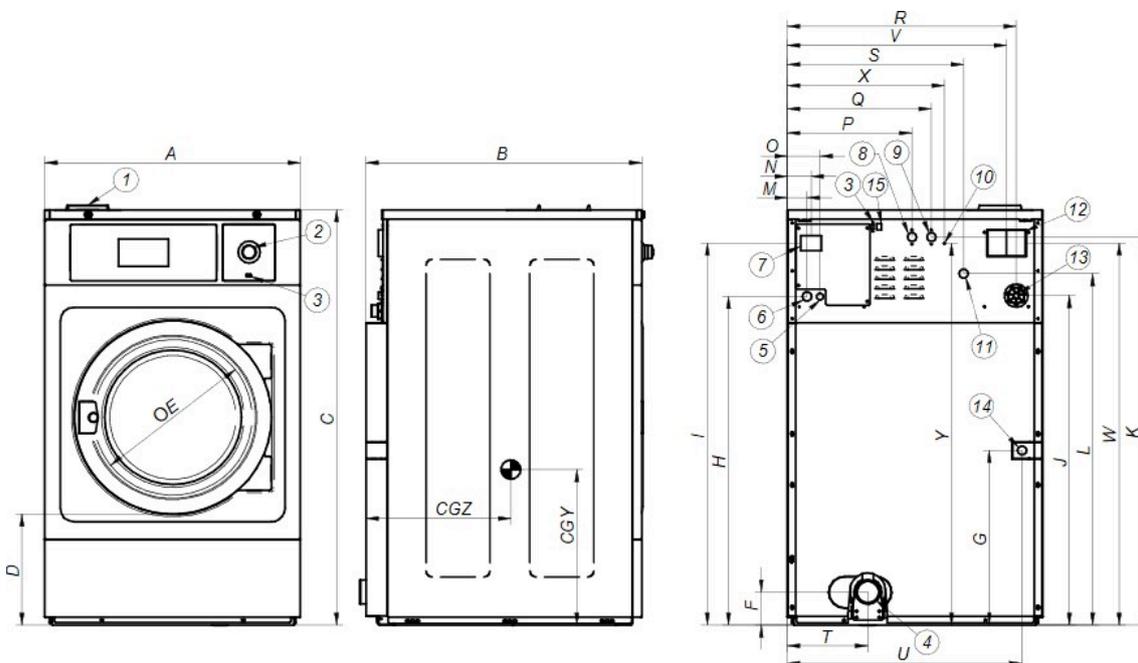

1. Soap dispenser
2. Emergency stop
3. USB Port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port
16. Clean side light

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
RS-28	mm	884	1.075	1.340	400	460	149	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	593
	inch	34,80	42,32	52,76	15,75	18,11	5,87	21,57	41,85	48,43	41,93	49,21	44,68	2,40	2,91	3,98	16,93	20,08	31,54	25,20	10,55	32,28	30,39	48,03	22,44	47,64	23,27	23,35

