



Primer

PN-120/18

Wall ironers Ø180

ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.

EFFICIENCY

Acoustic comfort : 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on EXCELLENCE).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.

FEATURES


Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
Two available models:
• **Standard**: roll with cotton polyester coating.
• **Nomex**: roll with Nomex coating.

EASY MAINTENANCE

Easy installation : requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.

OTHERS

Front feeding and return.
Roll Ø 180mm.
Working widths: 1.000 and 1.200 mm.
Electric heating.
CE certification.

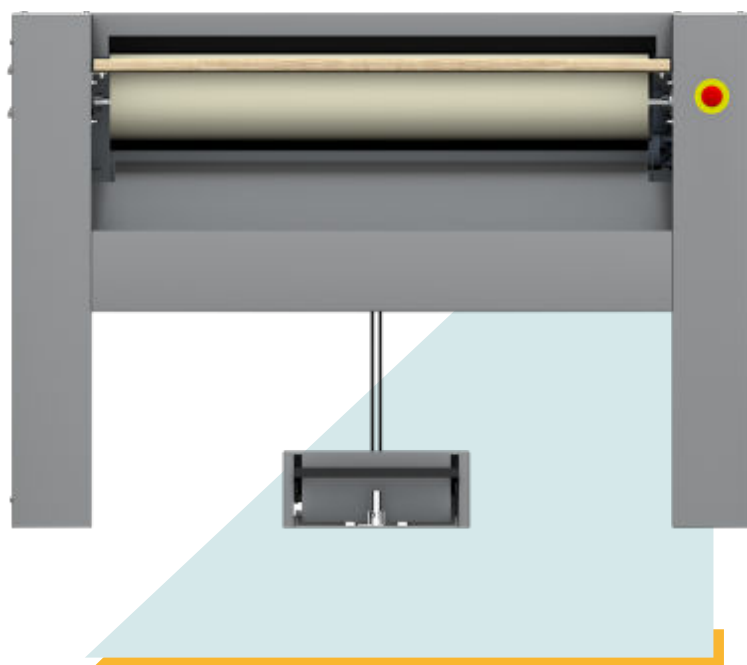

OPTIONS

- Pedal control instead of photocell (except mod. EXCELLENCE)
- 230 V I N 50 Hz (except mod. 200 EXCELLENCE)
- 400 N T 60 Hz
- 440 V III 60 Hz No N (maritime)

GENERAL DETAILS	UNIT.	PN-120/18
Theoretical production: 20-25 humidity	Kg/h	20
	Lb/h	44,09
Roll Ø	mm	180
	inch	7,09
Working width	mm	1.200
	inch	47,24
Working speed	m/min	2.02
	ft/mn	6,62
Electronic control	-	YES
Chest motion	-	Manual

POWER

Heating power	Kw	4
Roll motor power	Kw	0,03
Total electric power	Kw	4,03

CONNEXIONS


Tension 230 V I + N + T	nº x mm²/A	3 x 4 / 20A
	nº x AWG/A	3 x 11 / 20A
Tension 230 V III + T	nº x mm²/A	-
	nº x AWG/A	-
Tension 400 V III + N + T	nº x mm²/A	-
	nº x AWG/A	-

DIMENSIONS

Net / gross width	mm	1.570 / 1.690
	inch	61,81 / 66,54
Net / gross depth	mm	438 / 540
	inch	17,24 / 21,26
Net / gross height	mm	952 / 1.130
	inch	37,48 / 44,49
Net / gross weight gross	Kg	90 / 110
	Lb	198,42 / 242,51
Net / gross volume gross	m³	0,65 / 1,03
	ft³	22,95 / 36,37

OTHERS

No. Fume outlet	Nº	-
Ø Fume outlet	mm	-
	inch	-
Air flow	m³/h	-
	cfm	-
Noise Level	dB	55

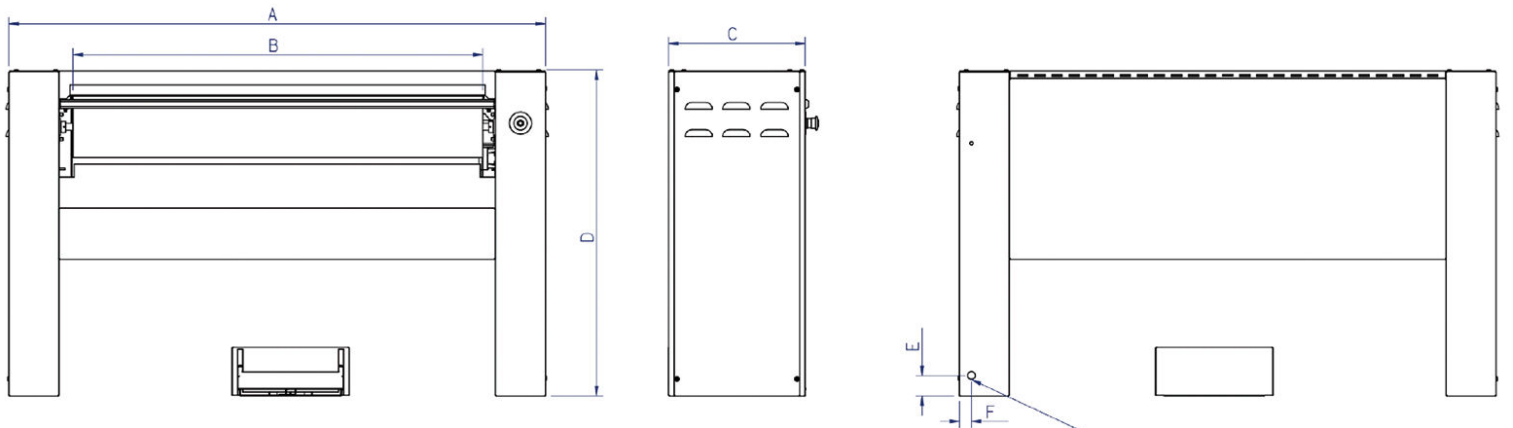

1. Electrical connection

	A	B	C	D	E	F
PN-100/18	1.694	1.447	689	1.354	68	785
PN-120/18	1.694	1.447	689	1.354	68	785

