Primer

DL-22 P
BASIC dryers

P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanized drum as standard.
Frequency inverter as standard.

EFFICIENCY

Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- Opposite door opening 11 to 35
- Back panel with air filter 11 to 35
- NG gas option (Natural) for DL
- Display for P programmer
- 400V 3N 60 Hz
- 230V 3~ 50 Hz DL-22/28/35
- 230V 3~ 60 Hz DL-22/28/35
- 230V 3~ 60 Hz DL-11 to 35 G/S
- 440/480 V III 60 Hz DL-22/28/35
- Maritime wooden packing DL-22
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DL-22 P	
Capacity 1/18	Kg	24,4	
	lb	53,9	
Capacity 1/20	Kg	22,0	
	lb	48,5	
Ø Drum	mm	835	
	inch	32,87	
Drum length	mm	800	
	inch	31,5	
Drum volume	l	440	
	cu ft	15,54	
Ø Door hole	mm	574	
	inch	22,60	
Door center height	mm	1.030	
	inch	40,55	
Height from floor to bottom of door	mm	672	
	inch	26,46	
ELECTRIC HEATING			
Evaporation capacity	L/h	17	
	US gallon/h	4,5	
Hourly output	Kg/h	34	
	lb/h	75	
Installed heating power	kW	24	
Installed electrical power	kW	24,97	
GAS HEATING			
Evaporation capacity (gas model)	L/h	20	
	US gallon/h	5,283	
Hourly output (gas model)	Kg/h	40	
	lb/h	88,2	
Installed gas heating power	kcal/h	26655	
	Btu/h	105776	
Installed gas heating power	kW	31	
Installed electrical power	kW	0,97	
Instant propane gas consumption (G31)	Kg/h	2,66	
	lb/h	5,86	
Instant natural gas consumption (G20)	m³/h	3,28	
	cfm	1,93	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
POWER AND VENTILATION			
Drum motor power	kW	0,37	
Fan motor power	kW	0,55	
Nominal air flow rate	m³/h	1.200	
	cfm	706	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	2,4	
	Btu/h	8194	
Max. front heat emission	kW	1,7	
	Btu/h	5736	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	890 / 970	
	inch	35 / 38,2	

Net / gross depth	mm	1.255 / 1.345
	inch	49,4 / 53
Net height / gross height without heating	mm	1.812 / 1.940
	inch	71,3 / 76,4
Net / gross weight	Kg	210 / 230
	lb	463 / 507
OTHERS		
Sound level	dB	65

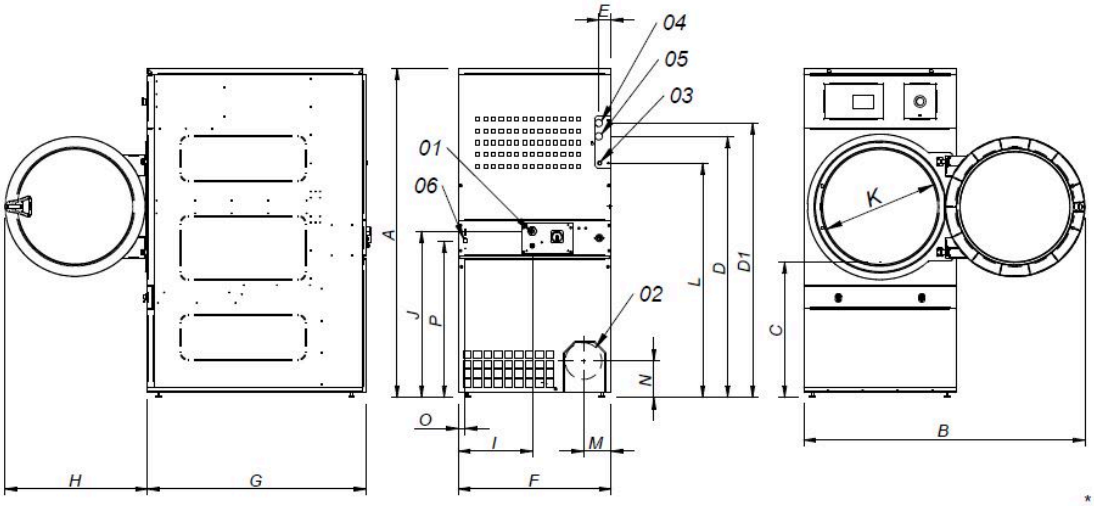

01 POWER SUPPLY
02 FUMES OUTPUT Ø200
03 GAS INLET 1/2"
04 STEAM INLET 3/4" (DL-18)
05 STEAM INLET 1"(DL-22)
06 CONDENSATE OUTLET 3/4" (DL-18)
07 CONDENSATE OUTLET 1" (DL-22)
08 ETHERNET CONNECTION (only available CONTROL T2 models)

* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DL - 18	1694*	1447	689	1354	1422	68	68	785	1125	735	380	870	575	1226	133	180	35	805
DL - 22	1812*	1552	743	1430	1532	112	55	890	1255	735	107	920	575	1344	238	180	37	860