



Primer

SP600-2600 SP Flatwork Ironers

FEATURES

- Dries, irons and folds linen lengthwise.
 - Folding type: longitudinal.
 - Can be equipped with an automatic feeder (optional), allowing a single operator to manage the feeding of items.
 - Maximum output up to 290 kg/h.*
 - Adjustable ironing speed up to 18 m/min.*
 - Maximum temperature: 165°C.
 - Automatic ironing speed control.
 - Automatic cooling of the ironing roller.
 - Available in one or two work lanes.
 - Intuitive and programmable 7" touchscreen.
 - Fume extraction system with automatic fan cleaning.
 - Customisable with different accessories.
- Key options:

SALIDA POSTERIOR / Rear exit



- 1 Recogedor post. + bypass (2/4 vías)
Rear collector + bypass (2/4 lanes)



- SMARTY
Plegadora prend. pequeñas
Small garment folder





OPTIONS

- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (needs option of vacuum feeding belts)
- Rear exit (it includes bypass)
- Crossfolder 260 + stacker for SP
- Motorized rear exit - height 860 mm. includes rear exit
- Small pieces back collector: 2 lanes for SP (it needs rear exit + bypass option)
- Small pieces back collector: 4 lanes for SP (it needs rear exit + bypass option)
- By pass for rear exit
- Double air pressure for thick linen
- Linen rejection system (dirty or torn)
- Different voltage from 400V 3~ +N 50 Hz
- Maritime packing for SP

GENERAL DATA	UNIT.	SP600-2600
Theoretical production* elec/steam/atm. Gas heating	Kg/h	75-105
Theoretical production* radiant gas burner	Kg/h	90-126
Ø Roll	mm	600
Working width	mm	2.600
Height floor-feeding	mm	1.050
Working speed	m/min	3-12
Control type	-	Digital
No. of programs	Nº.	20
MAIN FUNCTIONS		
Drying	-	YES
Ironing	-	YES
Longitudinal folding	-	YES
Cross folding	-	NO
Lateral stacking (Roll-Off or compact stacker)	-	NO
FOLDING		
1 lane - lengthfold	Nº.	1-2
1 lane - crossfold	Nº	NO
2 lanes - lengthfold	Nº	1-2
2 lanes - crossfold	Nº	NO
POWER		
Electric model - Consumption	A	78
Electric model - Heating power	kW	54
Electric model - Total electrical power	kW	55,9
Steam model - Consumption	Kg/h	95
Steam model - Power (max 12 bar)	kW	55
Steam model - Total electrical power	kW	1,9
Liquefied gas (LPG) model - Consumption	m³/h	2,50
Liquefied gas (LPG) model - Power	kW	67,40
Natural gas (NG) model - Consumption	m³/h	6,70
Natural gas (NG) model - Power	kW	63,3
Gas LPG / NG model - Total electrical power	kW	1,9
CONNECTIONS		
Ø Gas inlet	BSP	1"
Ø Steam inlet (12 bar max.)	BSP	1"
Ø Condensed (steam models)	BSP	1/2"
Ø Air inlet	mm	12
DIMENSIONS		
Net width / gross width	mm	3.670 / 3.830
Net depth / gross depth	mm	1.440 / 1.620
Net height / gross height	mm	2.030 / 1.960
Net weight / gross weight	Kg	2.050 / 2.300
Volume	m³	10,73 / 12,16
OTHERS		
Exhaust outlet	Nº	2
Exhaust outlet Ø	mm	120
Air extraction flow rate	m³/h	2 x 630
Air consumption (6.5 bar)	NI/h	7.000
Noise level	dB	<80

* 50% residual moisture, 140gr/m² of cotton, 100% roll utilization



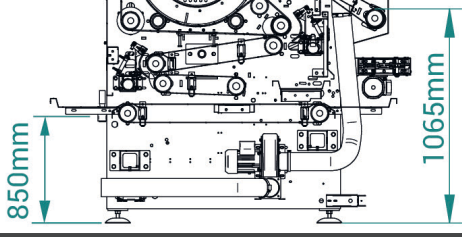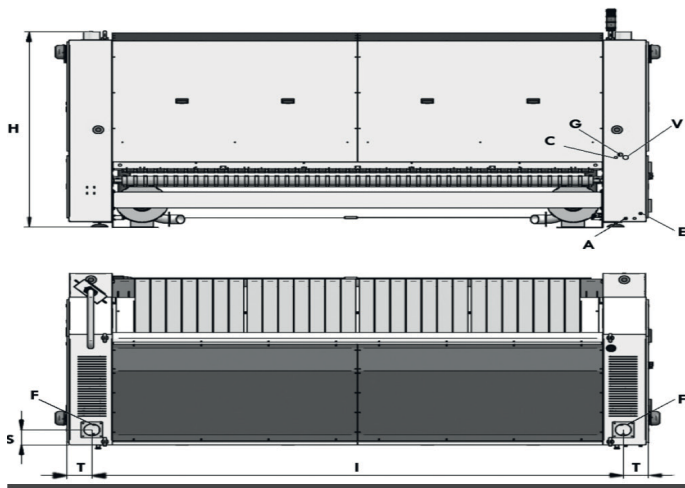

- A. Compressed air inlet
- C. Condensed discharge (steam mod.)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
S600-2600	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
S600-3300	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"

