Primer

DS-28 P
STANDARD dryers

P CONTROL

Push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

DUAL AIRFLOW - Optimized system of mixted air flow.
Big fluff filter.

VERSATILITY

Make to order: customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS


Drawer as fluff filter, stainless steel mesh.
Biggest door diameters.
Opening sense of door adjustable on site (models without sliding door).

EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components

OTHERS

Grey Skinplate outer casing, stainless steel look.
EFFICIENT DRUM: the new drum with stamped holes.
COOL DOWN: anti-wrinkle at the end of the cycle.
Heating options: electric, gas and steam.
CE approved.

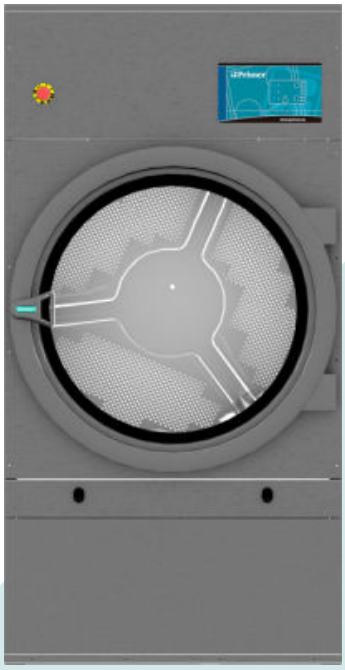


OPTIONS

- 400V 3~60Hz DS-28/35/45/60/80
- Double doorglass DS-28/35/45/60/80
- Opposite door opening DS-11 to 35
- P programmer display for DS-11 to 35
- Back panel with air filter DS-11 to 35
- Fluff filter with grid 0/6 mm (standard is 0/3 mm)
- Fluff filter with grid 1/2 mm (standard is 0/3 mm)
- Stainless steel AISI 304 outer casing for DS-28
- Reinforced drum for heavy-duty use 28-35kg
- Stainless steel AISI 304 front panel for DS-28/35
- Steam battery in stainless steel DS-28/35
- Low pressure steam battery DS-28/35
- NG gas option (Natural)
- Maritime wooden packing DS-28
- 400V 3N 60 Hz DS-11 to 35
- 230V 3~ 50 Hz DS-22/28/35 E
- 230V 3~ 60 Hz DS-22/28/35 E
- 230V 3~ 60 Hz DS-11 to 35 G/S
- 440/480V 3~ 60 Hz DS-22/28/35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DS-28 P
Capacity 1/18	Kg	30,6
	lb	67,3
Capacity 1/20	Kg	27,5
	lb	60,6
Ø Drum	mm	947
	inch	37,28
Drum length	mm	780
	inch	30,71
Drum volume	l	550
	cu ft	19,42
Ø Door hole	mm	802
	inch	31,57
Door center height	mm	1.040
	inch	40,94
Height from floor to bottom of door	mm	578
	inch	22,74
ELECTRIC HEATING		
Evaporation capacity	L/h	26,1
	US gallon/h	6,9
Hourly output	Kg/h	48,4
	lb/h	106,7
Installed heating power	kW	30
Installed electrical power	kW	31,15
GAS HEATING		
Evaporation capacity (gas model)	L/h	30,9
	US gallon/h	8,163
Hourly output (gas model)	Kg/h	59,3
	lb/h	130,73
Installed gas heating power	kcal/h	35254
	Btu/h	139899
Installed gas heating power	kW	41
Installed electrical power	kW	1,15
Instant propane gas consumption (G31)	Kg/h	3,51
	lb/h	7,74
Instant natural gas consumption (G20)	m^3/h	4,34
	cfm	2,55
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	50,10
	Btu/h	170948
Installed electrical power	kW	1,15
Steam consumption (8 barG) - Standard	kg/h	89
Steam consumption (116 psiG)	lb/h	107,2
Steam pressure	barG	6 - 9
	psiG	87 - 130,5
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	93
Steam consumption (72,5 psiG) - Low Pressure	lb/h	112
Steam pressure (low pressure)	barG	3 - 6
	psiG	43,5 - 95
Low pressure steam inlet - outlet	BSPT- ISO7.1	1" 1/2
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175ºC)	m3/h	-
Thermal oil connection	BSP	-

POWER AND VENTILATION			
Drum motor power	kW	0,55	
Fan motor power	kW	0,55	
Nominal air flow rate	m³/h	1.200	
	cfm	706	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	3	
	Btu/h	10242	
Max. front heat emission	kW	2,1	
	Btu/h	7170	
CONNECTIONS		**E**	**G / S**
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 35 / 100A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	985 / 1.065	
	inch	38,8 / 41,9	
Net / gross depth	mm	1.054 / 1.154	
	inch	41,5 / 45,4	
Net height / gross height without heating	mm	1.975 / 2.080	
	inch	77,8 / 81,9	
Net / gross weight	Kg	230 / 260	
	lb	507 / 573	
OTHERS			
Sound level	dB	65	

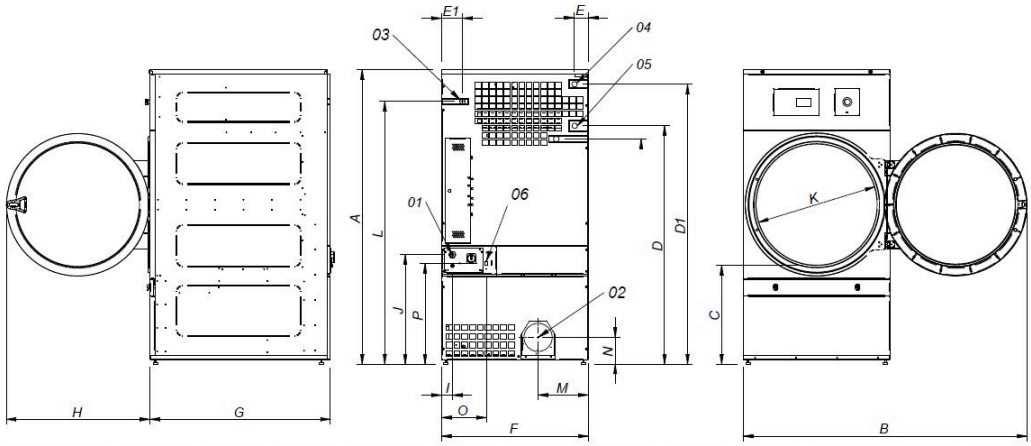

01 POWER SUPPLY
02 FUMES OUTPUT Ø200
03 GAS INLET 1/2"
04 STEAM INLET 1"
05 CONDENSATE OUTLET 1"
06 ETHERNET CONNECTION (only available T2 CONTROL models)

* Measurement with legs mounted (30mm)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DS-28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DS-35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676