



Primer

SPE1000-1-2600 SPE Flatwork Ironers


FEATURES

- In a space of just 18 m², it dries and irons, folds and stacks linen.
- Folding types: longitudinal and crosswise.
- Can be operated by a single operator.
- Maximum output up to 290 kg/h.*
- Adjustable ironing speed up to 18 m/min.*
- Maximum temperature: 165°C.
- Automatic ironing speed control.
- Automatic cooling of the ironing roller.
- Available in one or two work lanes.
- Intuitive and programmable 7" touchscreen. Optional mobile arm.
- Fume extraction system with automatic fan cleaning.
- Stackers can be added (optional).
- Customisable with different accessories.
- Featured options:

SALIDA LATERAL / Side exit



1 Apilador lat. compacto por palas
Side standard stacker by blades



2 Apilador lat. Roll-Off (por arrastre)
Side stacker Roll-Off

SALIDA POSTERIOR / Rear exit



3 Recogedor post. + bypass (2/4 vías)
Rear collector + bypass (2/4 lanes)



SMARTY
Plegadora prend. pequeñas
Small garment folder

*Maximum production and speed, variable depending on model, configuration and working conditions.



OPTIONS


- Four lanes for lengthfolding
- Motorized high table for side exit (no stacker) H=805mm
- Low table for side exit (no stacker) H=480mm
- Rotating control panel
- Compact side stacker by blades
- Roll-off side stacker
- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (needs option of vacuum feeding belts)
- By pass for rear exit
- Rear exit table SPE (needs bypass option)
- 2 lanes rear collector small garments (it needs bypass option)
- 4 lanes rear collector small garments (it needs bypass option)
- Double air pressure in length folds for thicker linen
- Linen reject system (dirty or torn)
- Remote service
- Different voltage from 400V 3~ +N 50 Hz
- Maritime packaging SPE
- Maritime packing for compact side stacker by blades
- Maritime packing for Roll-off side stacker
- Maritime packing for small pieces collector 2 lanes
- Maritime packing for small pieces collector 4 lanes

GENERAL DATA	UNIT.	SPE1000-1-2600
Theoretical production* elec/steam/atm. Gas heating	Kg/h	190-230*
Ø Roll	mm	1.000
Working width	mm	2.600
Height floor-feeding	mm	1.050
Working speed	mt/min	4-18
Control type	-	Digital
Nº of programs	Nº	20
Side stacker	Nº	Opt.
FOLDING		
1 lane - lengthfold	Nº	1-2
1 lane - crossfold	Nº	1-2-3
2 lanes - lengthfold	Nº	1-2
2 lanes - crossfold	Nº	1-2
POWER		
Electric heating	kW	90
Max. electric power electric heating	kW	93,4
Gas heating (natural / LPG)	kW	120,90 / 121,30
Max. electric power gas heating	kW	3,9
Steam heating	kW	120
Max. electric power steam heating	kW	3,9
CONNECTIONS		
Ø Gas inlet	BSP	1"
Ø Steam inlet (12 bar max.)	BSP	1-1/4"
Ø Condensed (steam models)	BSP	1"
Ø Air inlet	BSP	12
DIMENSIONS / PACKAGING DIMENSIONS		
Net width / gross width	mm	3.740 / 3.900
Net depth / gross depth	mm	2.290 / 2.300
Net height / gross height	mm	2.480 / 2.290
Net weight / gross weight	Kg	3.960 / 4.410
Volume	m3	21,24 / 20,54
OTHERS		
No. Fume outlet	Nº	2
Ø Fume outlet	mm	160
Extraction rate	m3/h	2 x 1.000
Compressed air consumption (6,5 bar)	mm	21.000
Sound Level	dB	70



* 50% residual moisture, 140gr/m² of cotton, 100% roll utilization




Compact Stacker
(roll-off)



Stacker

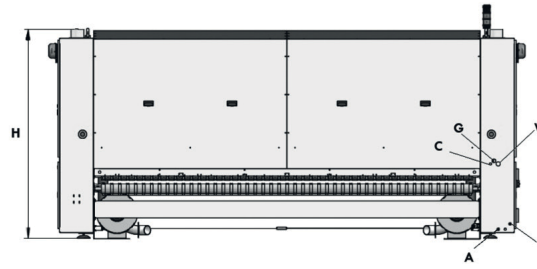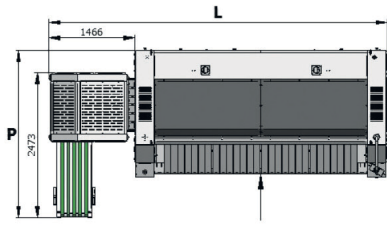

- A. Compressed air inlet
- C. Condensation discharge (steam models)
- E. Electrical connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

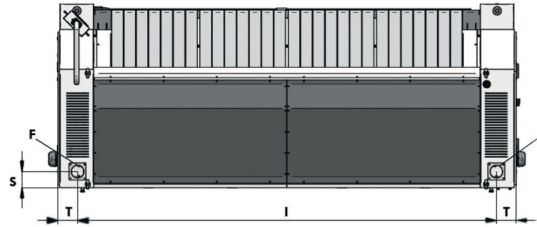

Compact Stacker

Stacker

	L	P
SPE1000-2600	4.425	2.385
SPE1000-3300	5.125	2.385

	L	P
SPE1000-2600	5.105	2.476
SPE1000-3300	5.805	2.476

	H	I	T	S	A	C	E	F	G	V	W
SPE1000-2600	2.247	1.196	1.208	345	Ø 12	1"	5G4	Ø 160	1"	1-1/4"	800
SPE1000-3300	2.247	1.896	1.208	345	Ø 12	1"	5G4	Ø 160	1"	1-1/4"	800